


Kinetix 5100 Drive Systems

Catalog Numbers 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, 2198-E1020-ERS, 2198-E2030-ERS, 2198-E2055-ERS, 2198-E2075-ERS, 2198-E2150-ERS, 2198-E4004-ERS, 2198-E4007-ERS, 2198-E4015-ERS, 2198-E4020-ERS, 2198-E4030-ERS, 2198-E4055-ERS, 2198-E4075-ERS, 2198-E4150-ERS

Topic	Page
Summary of Changes	2
Introduction	2
Hardwired Safety Configuration	3
Determine What You Need	3
2090-Series Kinetix TLP Motor Cables Overview	9
2090-Series Motor Power/Brake and Feedback Cables Overview	11
Kinetix TLP (200V-class) Multi-purpose Servo Motors	13
Kinetix TLP (400V-class) Multi-purpose Servo Motors	19
Kinetix MPL (200V-class) Low-inertia Servo Motors	24

Topic (continued)	Page
Kinetix MPL (400V-class) Low-inertia Servo Motors	30
Kinetix MPM (200V-class) Medium-inertia Servo Motors	38
Kinetix MPM (400V-class) Medium-inertia Servo Motors	41
Kinetix MPF (200V-class) Food-grade Servo Motors	48
Kinetix MPF (400V-class) Food-grade Servo Motors	51
Kinetix MPS (200V-class) Stainless-steel Servo Motors	53
Kinetix MPS (400V-class) Stainless-steel Servo Motors	54
Kinetix TLY (200V-class) Compact Servo Motors	56
Kinetix TL (200V-class) Compact Servo Motors	62

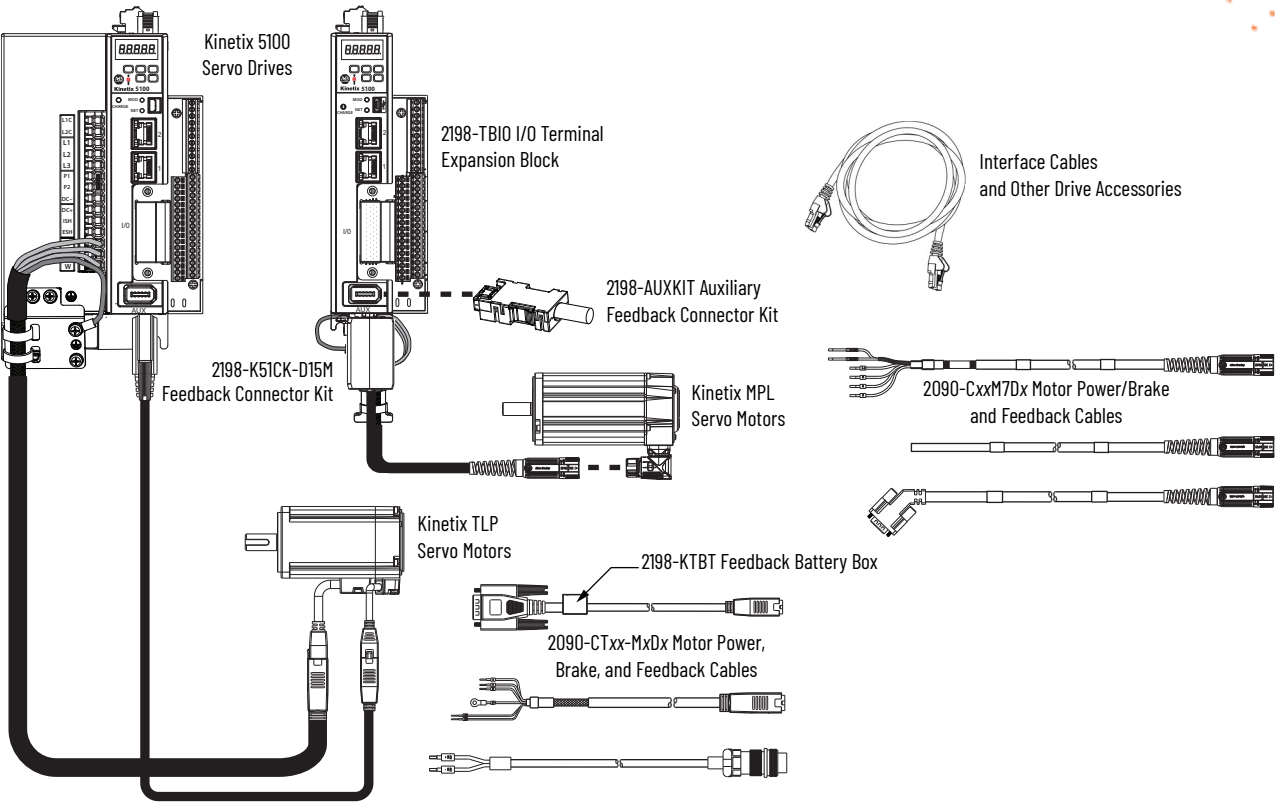

Summary of Changes

This manual contains new and updated information as indicated in the following table.

Topic	Page
Added performance specifications for Kinetix TLP (400V-class) multi-purpose servo motors with Kinetix 5100 drives.	19
Added performance specifications for Kinetix MPL (400V-class) low-inertia servo motors with Kinetix 5100 drives.	30
Added performance specifications for Kinetix MPM (400V-class) medium-inertia servo motors with Kinetix 5100 drives.	41
Added performance specifications for Kinetix MPF (400V-class) food-grade servo motors with Kinetix 5100 drives.	51
Added performance specifications for Kinetix MPS (400V-class) stainless-steel servo motors with Kinetix 5100 drives.	54
Added performance specifications for Kinetix TLY (200V-class) compact servo motors with Kinetix 5100 drives.	56
Added performance specifications for Kinetix TL (200V-class) compact servo motors with Kinetix 5100 drives.	62

Introduction

Use this publication if your application includes the Kinetix® 5100 drive family and Kinetix TLP servo motors or any of the other compatible Allen-Bradley® motors. The 2198-K51CK-D15M feedback connector kit is available for use when Kinetix MPL, MPM, MPF, MPS or Kinetix TL and TLY servo motors are used with flying-lead cables. For more Kinetix drive and motor information, see the Kinetix Motion Control Selection Guide, publication [KNX-SG001](#), or Motion Analyzer software.

The purpose of this publication is to assist you in identifying the drive system components and accessory items that you need for your Kinetix 5100 drive and motor combination. Diagrams in this publication illustrate how many of the common drive accessory items are used in a typical system. See the Kinetix Servo Drives Specifications Technical Data, publication [KNX-TD003](#), for detailed accessory descriptions and specifications.

Drive/motor system combinations also include the following:

- Motor/cable combinations table
- Drive and motor performance specifications table
- Torque/speed curves with each motor matched to the drive that provides optimum performance


Performance specification data and curves reflect nominal system performance of a typical system with motor and drive at the rated ambient temperature and line voltage. For additional information on ambients, line conditions, and valid combinations that are not shown in this publication, refer to the Motion Analyzer system sizing and selection tool.

IMPORTANT These system combinations do not include all possible motor/drive combinations. See the Motion Analyzer system sizing and selection tool to verify compatibility. Access Motion Analyzer at <https://motionanalyzer.rockwellautomation.com>.

Hardwired Safety Configuration

Kinetix 5100 servo drives are capable of safe torque-off (STO) safety functions via hardwired connections. In this example, the safe torque-off (STO) connectors are wired to external safety devices with cascading hardwired safety-connections from one drive to another.

Hardwired Safe Torque-off

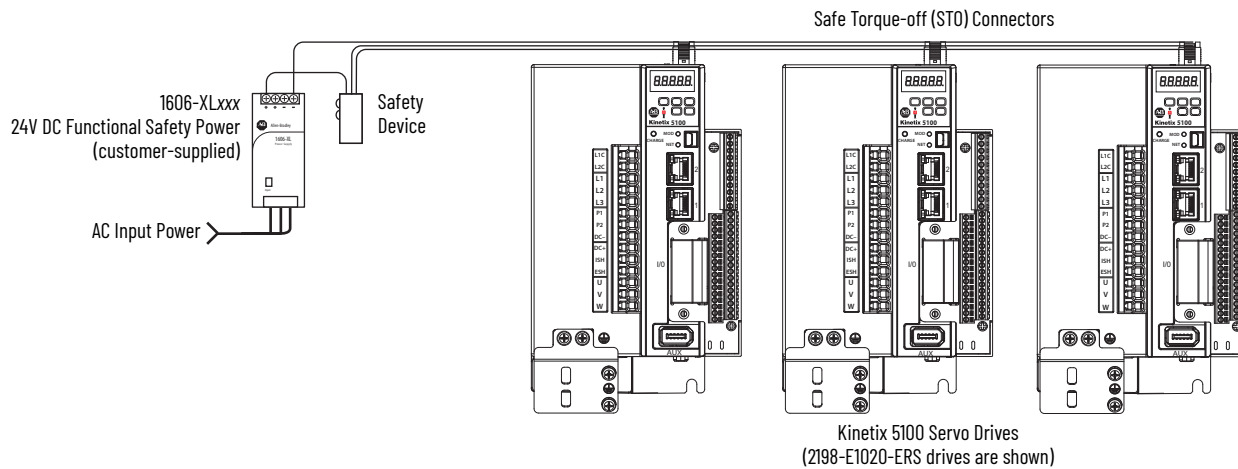

Determine What You Need

For each Kinetix 5100 drive system, the drive and servo motor catalog numbers are required to determine the motor power and feedback cable catalog numbers. A 24V DC power supply is also required for digital I/O circuitry, motor brake circuitry, and control power on 2198-E4xxx-ERS (400V-class) drives.

- For applications with Kinetix TLP servo motors, use 2090-CTFB-MxDD feedback cables with drive-end (D-sub) connector for direct connection to the Kinetix 5100 drive. If you build your own flying-lead cables, 2198-K51CK-D15M feedback connector kits are available.
- For applications with Kinetix MPL, MPM, MPF, and MPS servo motors, use 2090-CFBM7DD feedback cables with drive-end (D-sub) connector for direct connection to the Kinetix 5100 drive. Use 2198-K51CK-D15M connector kits with 2090-CFBM7DF flying-lead feedback cables.
- For applications with Kinetix TLY servo motors, use 2090-CFBM6DD feedback cables with drive-end (D-sub) connector for direct connection to the Kinetix 5100 drive when battery backup is not required. When battery backup is required, use 2198-K51CK-D15M connector kits with 2090-CFBM6DF flying-lead feedback cables.
- For applications with Kinetix TL servo motors, use 2090-DANFCT-Sxx feedback cables and remove the drive-end connector. Use 2198-K51CK-D15M connector kits for making feedback connections and include a customer-supplied battery when battery-backup of position data is required.
- 2198-TBIO I/O terminal block
- 2198-USBC USB cable and 2198-USBF USB filter

Optional equipment includes the following:

- Bulletin 2198 AC line filters
- 2198-AUXKIT auxiliary feedback connector kit
- Bulletin 2097 or 2198 shunt resistors
- 1585J-M8CBJM-x (shielded) Ethernet cable


Example diagrams of the required and optional equipment are provided.

Kinetix 5100 EtherNet/IP Indexing Servo Drives

Drive Cat. No.	Input Voltage	Continuous Output Power kW	Continuous Output Current A (rms)	Peak Output Current A (rms)	Features
2198-E1004-ERS	95...132V rms single-phase 170...253V rms single-phase 170...253V rms three-phase	0.20 0.40 0.40	2.60	6.50	<ul style="list-style-type: none"> Designed for optimum performance with Kinetix TLP servo motors EtherNet/IP™ Indexing Standalone (pulse train, Digital I/O, and analog I/O control) Safe torque-off
2198-E1007-ERS		0.375 0.75 0.75	5.10	15.4	
2198-E1015-ERS		0.75 1.50 1.50	7.90	23.7	
2198-E1020-ERS		1.00 2.00 2.00	13.4	40.6	
2198-E2030-ERS	170...253V rms three-phase	3.00	17.9	55.95	
2198-E2055-ERS		5.50	41.3	91.4	
2198-E2075-ERS		7.50	49.0	127.5	
2198-E2150-ERS		15.00	78.0	162.0	
2198-E4004-ERS	342...528V rms three-phase	0.40	1.60	5.4	
2198-E4007-ERS		0.75	3.19	8.0	
2198-E4015-ERS		1.50	6.05	15.11	
2198-E4020-ERS		2.00	7.42	20.78	
2198-E4030-ERS		3.00	13.95	26.08	
2198-E4055-ERS		5.50	24.8	37.65	
2198-E4075-ERS		7.50	31.0	53.32	
2198-E4150-ERS		15.0	41.26	70.14	

Motor feedback connections are made at the 15-pin motor feedback (MFB) connector. These examples illustrate how you can use the 2198-K51CK-D15M connector kit for making these connections. Auxiliary feedback connections are made at the 10-pin auxiliary feedback connector (AUX) with the 2198-AUXKIT auxiliary feedback connector kit. This port supports incremental encoder types only.

Feedback Configuration Examples

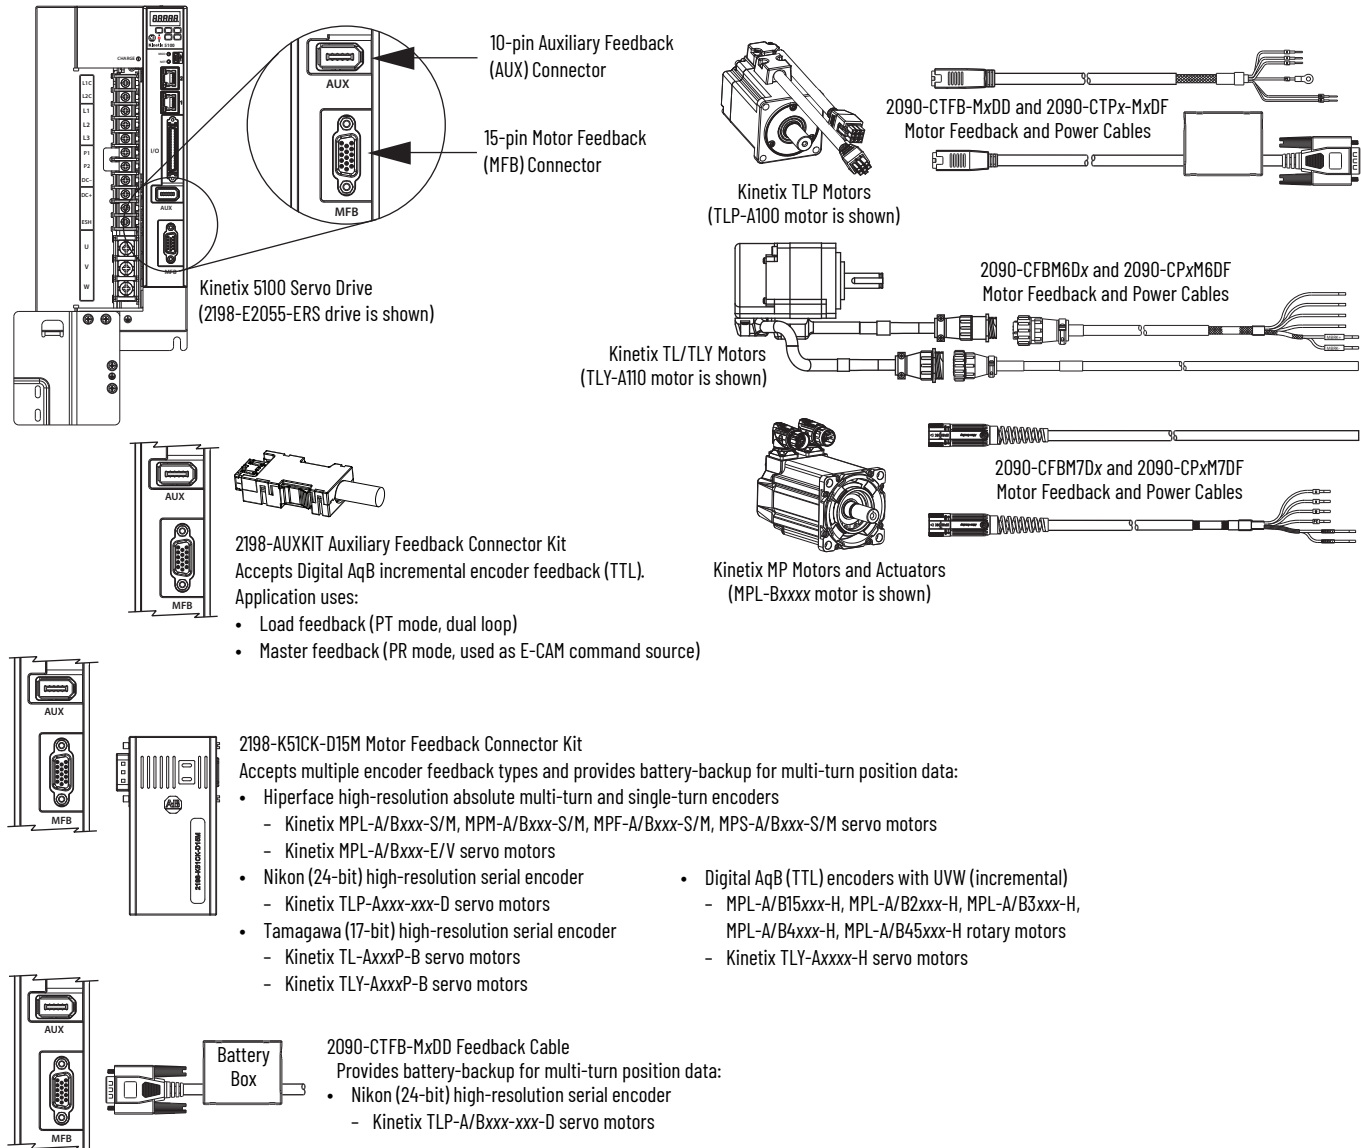


Required Drive Accessories

Drive Accessory	Description	Cat. No.
Motor feedback connector kit	Motor feedback connector kit (required for flying-lead feedback cable).	2198-K51CK-D15M ⁽¹⁾
I/O terminal expansion block	Provides termination points for 50-pin I/O connector.	2198-TB10 ⁽¹⁾
USB cable	For connection to PC with KNX5100C software to configure the drive.	2198-USBC ⁽¹⁾
USB filter	To reduce interference and maintain a reliable connection to the PC.	2198-USBF ⁽¹⁾
Motor cables	Kinetix TLP servo motors with high-resolution absolute encoder. ⁽²⁾	Refer to the specific drive/motor combination for the motor cables required for your system.
	Kinetix MPL, MPM, MPF, and MPS servo motors with high-resolution absolute or incremental encoders.	
	Kinetix TL and TLY servo motors with high-resolution absolute or incremental encoders. ⁽²⁾	
24V power supply	24V DC for digital I/O circuitry, motor brake circuitry, and control power on 2198-E4xxx-ERS (400V-class) drives.	1606-XLxxx


(1) Refer to the Kinetix Servo Drives Specifications Technical Data, publication [KNX-TD003](#), for detailed descriptions and specifications for these drive accessories.

(2) battery backup required with high-resolution absolute encoders for position retention during a power loss.


Kinetix 5100 Drive with Kinetix TLP Servo Motor

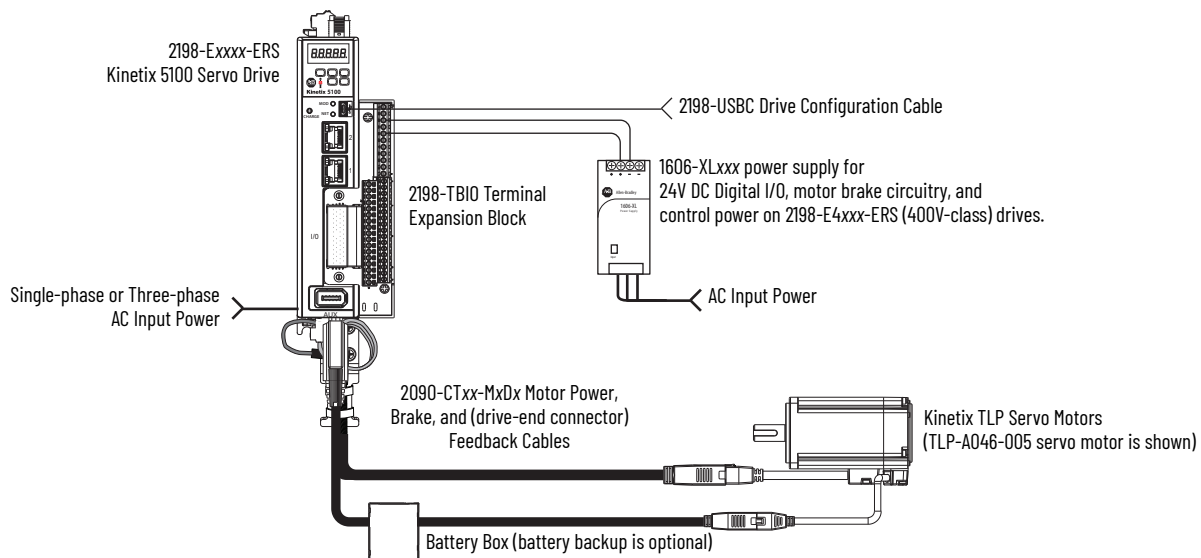


Kinetix 5100 Drive with Kinetix MPL, MPM, MPF, and MPS Servo Motor

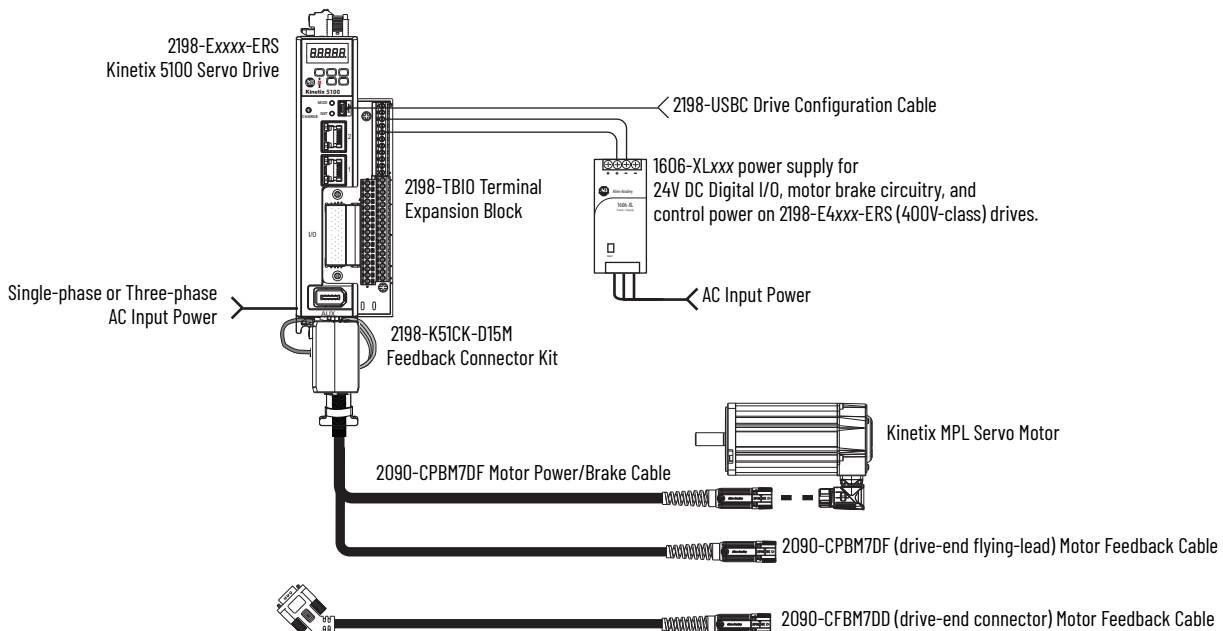

Kinetix 5100 Drive with Kinetix TLY Servo Motors

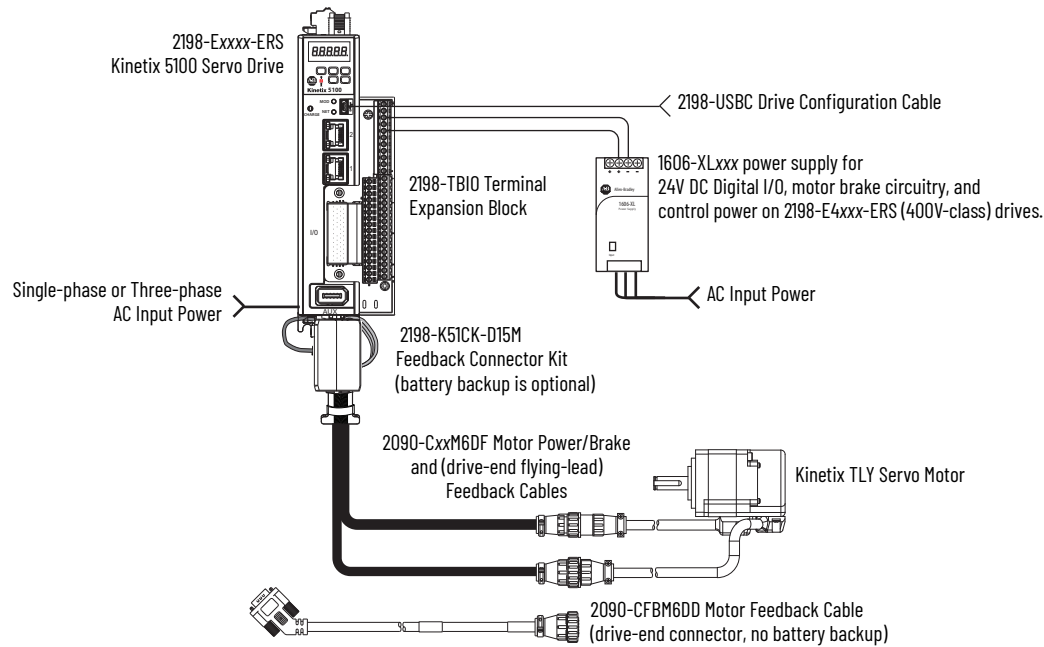

Kinetix 5100 Drive with Kinetix TL Servo Motors

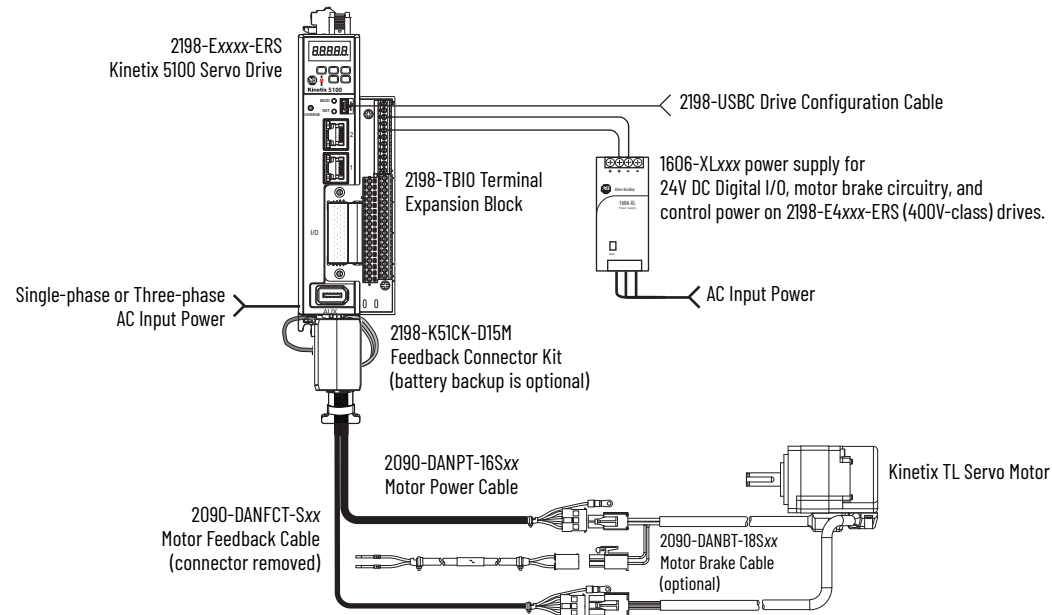


Refer to the Kinetix Servo Drives Specifications Technical Data, publication [KNX-TD003](#), for detailed descriptions and additional specifications for the Kinetix 5100 drive family.

Optional Drive Accessories

Drive Accessory	Description	Cat. No.
Auxiliary feedback connector kit	Provides termination points for the auxiliary feedback (AUX) connector.	2198-AUXKIT
Ethernet network cables	Double-ended, non-flex, shielded.	1585J-M8CBJM-x
	Double-ended, high-flex, shielded.	1585J-M8UBJM-x
AC line filters	AC line filter for CE compliance.	<ul style="list-style-type: none"> 2198-DBRxx-F 2198-DBxx-F
Bulletin 2097 and 2198 shunt resistors	Panel-mount shunt resistor.	<ul style="list-style-type: none"> 2097-Rx 2198-Rxxxx
Ground plate	Ground plate provides termination points for motor power ground and cable shield for better EMC performance and is included with each drive. Replacement ground plates are also available.	2198-GPFRMx

Kinetix 5100 Optional Accessories

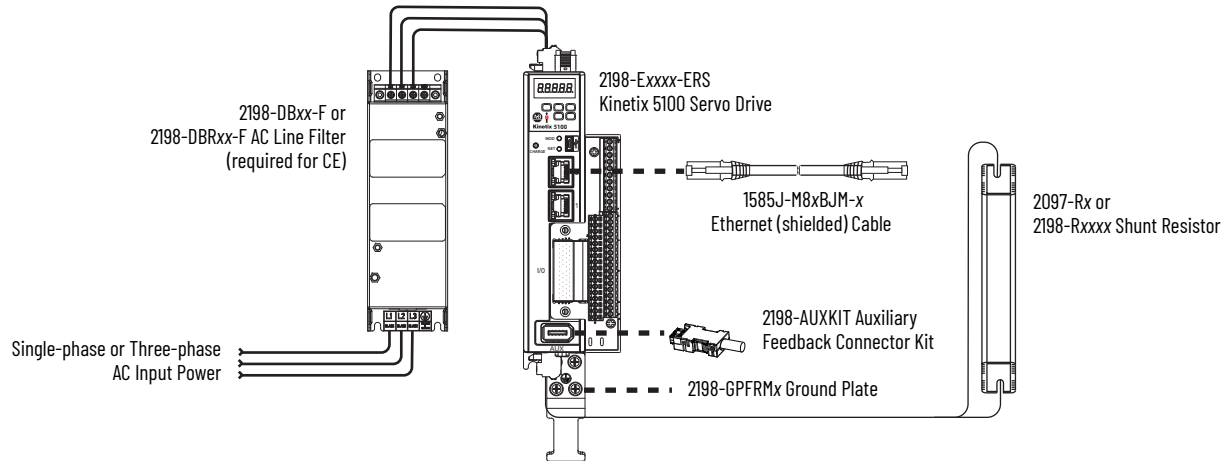

Replacement Drive Accessories

Drive Accessory	Description	Cat. No.
Connector set	Replacement input power, motor power, shunt, and STO wiring plugs (included with 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS drives).	2198-CONKIT-PKG
Connector set (STO only)	Replacement STO wiring plug (included with 2198-E1020-ERS, 2198-E2030-ERS, 2198-E2055-ERS, 2198-E2075-ERS, 2198-E2150-ERS, and all 2198-E4xxx-ERS drives).	2198-CONKIT-STO

Refer to the Kinetix Servo Drives Specifications Technical Data, publication [KNX-TD003](#), for detailed descriptions and additional specifications for the Kinetix 5100 drive accessories.



2090-Series Kinetix TLP Motor Cables Overview

These cables apply to Kinetix TLP servo motors. For maximum motor-cable lengths with Kinetix 5100 drives, see the Kinetix 5100 EtherNet/IP Indexing Servo Drives User Manual, publication [2198-UM004](#).





2090-CTFB-MxxD Feedback Cables

Feedback cables include the battery box wired and attached to the cable. Replacement 2198-KTBT battery boxes are also available. 2090-CTFB-MADD cables attach to on-motor rectangular motor connectors. 2090-CTFB-MFDD cables attach to military-style motor connectors.

Feedback Cable Descriptions (standard, non-flex)

Standard Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTFB-MADD-CFAxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end 15-pin connector (DD) With battery box attached Feedback wires (FB) 			Rectangular
2090-CTFB-MFDD-CFAxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B235 motors (MF) Drive-end 15-pin connector (DD) With battery box attached Feedback wires (FB) 			Military style

Feedback Cable Descriptions (continuous-flex)

Continuous-flex Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTFB-MADD-CFFxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end 15-pin connector (DD) With battery box attached Feedback wires (FB) 			Rectangular
2090-CTFB-MFDD-CFFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B235 motors (MF) Drive-end 15-pin connector (DD) With battery box attached Feedback wires (FB) 			Military style
2090-CTFB-MAET-CFFxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end (male) connector, extension (ET) Feedback wires (FB) 			Rectangular
2090-CTFB-MFET-CFFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B235 motors (MF) Drive-end (male) connector, extension (ET) Feedback wires (FB) 			Military style





2090-CTFB-MxET extension cables provide continuous-flex cable technology between your standard (non-flex) cable and the continuous-flex application.

Motor-end cable connector kits for use when building your own cables are also available. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information.








2090-CTPx-Mxxx Power/Brake Cables

2090-CTPx-MADF cables attach to the on-motor cable. 2090-CTPx-MC/D/E cables attach to the motor connector. Drive-end flying leads are prepared specifically for Kinetix TLP servo motors.

Power/Brake Cable Descriptions (standard, non-flex)

Standard Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTPB-MADF-xxAxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end flying-leads (DF) Power/brake wires (PB) 			Rectangular
2090-CTPW-MADF-xxAxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end flying-leads (DF) Power wires only (PW) 			
2090-CTPB-MCDF-xxAxx 2090-CTPB-MDDF-xxAxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 (MD) Drive-end flying-leads (DF) Power/brake wires (PB) 			Military style
2090-CTPW-MCDF-xxAxx 2090-CTPW-MDDF-xxAxx 2090-CTPW-MEDF-xxAxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 motors (MD) Applies to TLP-A/B200...TLP-A/B235 motors (ME) Drive-end flying-leads (DF) Power wires only (PW) 			

Power/Brake Cable Descriptions (continuous-flex)


Continuous-flex Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTPB-MADF-xxFxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end flying-leads (DF) Power/brake wires (PB) 			Rectangular
2090-CTPW-MADF-xxFxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end flying-leads (DF) Power wires only (PW) 			
2090-CTPB-MAET-xxFxx 2090-CTPW-MAET-xxFxx	<ul style="list-style-type: none"> Applies to TLP-x046...TLP-x100 motors (MA) Drive-end (male) connector, extension (ET) Power/brake wires (PB) Power wires only (PW) 			Military style
2090-CTPB-MCDF-xxFxx 2090-CTPB-MDDF-xxFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 motors (MD) Drive-end flying-leads (DF) Power/brake wires (PB) 			
2090-CTPW-MCDF-xxFxx 2090-CTPW-MDDF-xxFxx 2090-CTPW-MEDF-xxFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 motors (MD) Applies to TLP-A/B200 motors (ME) Drive-end flying-leads (DF) Power wires only (PW) 			Military style
2090-CTPB-MCET-xxFxx 2090-CTPB-MDET-xxFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 (MD) Drive-end (male) connector, extension (ET) Power/brake wires (PB) 			
2090-CTPW-MCET-xxFxx 2090-CTPW-MDET-xxFxx 2090-CTPW-MEET-xxFxx	<ul style="list-style-type: none"> Applies to TLP-A/B115...TLP-A/B145 motors (MC) Applies to TLP-A/B200 motors (MD) Applies to TLP-A/B200...TLP-A/B235 motors (ME) Drive-end (male) connector, extension (ET) Power wires only (PW) 			Military style

2090-CTPx-MxET extension cables provide continuous-flex cable technology between your standard (non-flex) cable and the continuous-flex application.



2090-CTBK-MBxx Brake Cables

Brake wires for TLP-A/B200-550, TLP-A/B200-750, and TLP-A/B235-xxx servo motors are in a separate cable.

Brake Cable Descriptions (standard, non-flex)

Standard Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTBK-MBDF-20Axx	<ul style="list-style-type: none"> Applies to TLP-A/B200-550, TLP-A/B200-750, and TLP-A/B235-xxx motors (MB) Drive-end flying-leads (DF) Brake wires (BK) 			Military style

Brake Cable Descriptions (continuous-flex)








Continuous-flex Cable Cat. No.	Description	Cable Configuration		Motor Connector
		Motor End	Drive End	
2090-CTBK-MBDF-20Fxx	<ul style="list-style-type: none">• Applies to TLP-A/B200-550, TLP-A/B200-750, and TLP-A/B235-xxx motors (MB)• Drive-end flying-leads (DF)• Brake wires (BK)			Military style
2090-CTBK-MBET-20Fxx	<ul style="list-style-type: none">• Applies to TLP-A/B200-550, TLP-A/B200-750, and TLP-A/B235-xxx motors (MB)• Drive-end (male) connector, extension (ET)• Brake wires (BK)			

2090-CTBK-MBET extension cables provide continuous-flex cable technology between your standard (non-flex) cable and the continuous-flex application. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for cable specifications.

2090-Series Motor Power/Brake and Feedback Cables Overview





These cables apply to Kinetix MPL, MPM, MPF, MPS and Kinetix TL and TLY motors with high-resolution absolute encoders. For maximum motor-cable lengths with Kinetix 5100 drives, see the Kinetix 5100 Single-axis EtherNet/IP Servo Drives User Manual, publication [2198-UM004](#).

Feedback Cable Descriptions (standard, non-flex)

Standard Cable Cat. No.	Description	Cable Configuration		Motor/Actuator Connector
		Motor End	Drive End	
2090-CFBM7DF-CEAAxx	<ul style="list-style-type: none">• Drive-end flying-leads (DF)• High-resolution or resolver applications (CE)			SpeedTec DIN (M7)
2090-CFBM7DD-CEAAxx	<ul style="list-style-type: none">• Drive-end 15-pin connector (DD)• High-resolution or resolver applications (CE)			
2090-XXNFMF-Sxx	<ul style="list-style-type: none">• Drive-end flying-leads• High-resolution or incremental applications			Threaded DIN (M4)
2090-CFBM4E2-CATR	<ul style="list-style-type: none">• Drive-end bayonet (E2), transition (TR) cable ⁽¹⁾• Motor-end threaded DIN (M4)• All feedback types (CA)			
2090-CFBM6DF-CBAAxx	<ul style="list-style-type: none">• Drive-end flying-leads (DF)• High-resolution, battery backup or Incremental applications (CB)			Circular Plastic (M6)
2090-CFBM6DD-CCAAxx	<ul style="list-style-type: none">• Drive-end 15-pin connector (DD)• Incremental applications only (CC)			
2090-DANFCT-Sxx	<ul style="list-style-type: none">• Drive-end 20-pin connector• High-resolution applications			Rectangular Plastic

(1) Threaded DIN connector (motor end) and bayonet connector for 2090-XXNFMF-Sxx cable.









Feedback Cable Descriptions (continuous-flex)

Continuous-flex Cable Cat. No.	Description	Cable Configuration		Motor/Actuator Connector
		Motor End	Drive End	
2090-CFBM7DF-CEAFxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) High-resolution applications (CE) 			SpeedTec DIN (M7)
2090-CFBM7DD-CEAFxx	<ul style="list-style-type: none"> Drive-end 15-pin connector (DD) High-resolution applications (CE) 			
2090-CFBM7DF-CDAFxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) High-resolution or incremental applications (CD) 			
2090-CFBM7E7-CDAFxx 2090-CFBM7E7-CEAFxx	<ul style="list-style-type: none"> Drive-end (male) connector, extension (E7) ⁽¹⁾ Motor-end SpeedTec DIN cable plug (M7) 			

(1) SpeedTec DIN connector (motor end) and male connector for extending SpeedTec or threaded DIN cable.




Motor-end cable connector kits, for use when building your own cables are also available. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information.

Power/Brake Cable Descriptions (standard, non-flex)

Standard Cable Cat. No.	Description	Cable Configuration		Motor/Actuator Connector
		Motor End	Drive End	
2090-CPBM7DF-xxAAxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power/brake wires (PB) 			SpeedTec DIN (M7)
2090-CPWM7DF-xxAAxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power wires only (PW) 			
2090-CPBM4E2-xxTR	<ul style="list-style-type: none"> Drive-end bayonet (E2), transition (TR) cable ⁽¹⁾ Motor-end threaded DIN (M4) Power/brake wires (PB) 			Threaded DIN (M4)
2090-CPWM4E2-xxTR	<ul style="list-style-type: none"> Drive-end bayonet (E2), transition (TR) cable ⁽¹⁾ Motor-end threaded DIN (M4) Power wires only (PW) 			
2090-CPBM6DF-16AAxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power/brake wires (PB) 			Circular Plastic (M6)
2090-CPWM6DF-16AAxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power wires only (PW) 			
2090-DANPT-16Sxx	<ul style="list-style-type: none"> Drive-end flying-leads Power wires only 			Rectangular Plastic
2090-DANBT-18Sxx	Drive-end flying-lead brake wires			

(1) Threaded DIN connector (motor end) and bayonet connector for 2090-XXNFMP-Sxx cable.

Power/Brake Cable Descriptions (continuous-flex)

Continuous-flex Cable Cat. No.	Description	Cable Configuration		Motor/Actuator Connector
		Motor End	Drive End	
2090-CPBM7DF-xxAFxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power/brake wires (PB) 			SpeedTec DIN (M7)
2090-CPWM7DF-xxAFxx	<ul style="list-style-type: none"> Drive-end flying-leads (DF) Power wires only (PW) 			
2090-CPBM7E7-xxAFxx	<ul style="list-style-type: none"> Drive-end (male) connector, extension (E7) ⁽¹⁾ Motor-end SpeedTec DIN cable plug (M7) 			

(1) SpeedTec DIN connector (motor end) and male connector for extending SpeedTec or threaded DIN cable.

Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for cable specifications.

Kinetix 5100 (200V-class) Drives with Kinetix TLP Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 230V, nominal input) when matched with Kinetix TLP (200V-class) multi-purpose servo motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and optimum torque/speed curves.

These system performance tables and torque/speed curves reflect single-phase and three-phase drive operation (with 230V, nominal input) with 200V-class motors; however, only 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, and 2198-E1020-ERS drives are capable of single-phase operation.

Kinetix TLP Motor and Cable Combinations

Rotary Motor (200V-class) ⁽¹⁾ Cat. No.	Motor Power/Brake Cable ⁽²⁾	Feedback Cable Cat. No. ⁽²⁾	Brake Cat. No. ⁽²⁾
TLP-A046-xxx, TLP-A070-xxx, TLP-A090-xxx, ⁽³⁾ TLP-A100-xxx	2090-CTPx-MADF-18Axx (standard) or 2090-CTPx-MADF-18Fxx (continuous-flex)	2090-CTFB-MADD-CFAxx (standard) or 2090-CTFB-MADD-CFFxx (continuous-flex)	Not applicable. Brake conductors are included in the power cable.
TLP-A115-100, ⁽⁴⁾ TLP-A145-050, TLP-A145-100	2090-CTPx-MCDF-16Axx (standard) or 2090-CTPx-MCDF-16Fxx (continuous-flex)	2090-CTFB-MFDD-CFAxx (standard) or 2090-CTFB-MFDD-CFFxx (continuous-flex)	
TLP-A115-200, TLP-A145-090, TLP-A145-150, TLP-A145-250	2090-CTPx-MCDF-12Axx (standard) or 2090-CTPx-MCDF-12Fxx (continuous-flex)		
TLP-A200-200, TLP-A200-300, TLP-A200-350 ⁽⁵⁾	2090-CTPx-MDDF-12Axx (standard) or 2090-CTPx-MDDF-12Fxx (continuous-flex)		
TLP-A200-450	2090-CTPx-MDDF-08Axx (standard) or 2090-CTPx-MDDF-08Fxx (continuous-flex)		
TLP-A200-550, TLP-A200-750, TLP-A235-11K ^{(6) (7)}	2090-CTPW-MEDF-06Axx (standard) or 2090-CTPW-MEDF-06Fxx (continuous-flex)	2090-CTBK-MBDF-20Axx (standard) or 2090-CTBK-MBDF-20Fxx (continuous-flex)	2090-CTBK-MBDF-20Axx (standard) or 2090-CTBK-MBDF-20Fxx (continuous-flex)
TLP-A235-15K ^{(8) (7)}	2090-CTPW-MEDF-04Axx (standard) or 2090-CTPW-MEDF-04Fxx (continuous-flex)		

(1) The TLP-A046...TLP-A100 frame on-motor cables include 18 AWG conductors that are compatible with 2090-CTPx-MADF-18xxx cable conductors.

(2) Refer to the Kinetix Motion Accessories Specifications Technical Data, publication [KNX-TD004](#), for cable specifications.

(3) For TLP-A090-xxx motors, use 2090-CTPx-MADF-16xxx motor power/brake cable to comply with NFPA 79 requirements.

(4) For TLP-A115-100 motors, use 2090-CTPx-MCDF-12xxx motor power/brake cable to comply with NFPA 79 requirements.

(5) For TLP-A200-350 motors, use 2090-CTPx-MDDF-08xxx motor power/brake cable to comply with NFPA 79 requirements.

(6) For TLP-A235-11K motors, use 2090-CTPx-MEDF-04xxx motor power cable to comply with NFPA 79 requirements.

(7) Only these motors have separate brake connectors and brake cables. All other motors have brake wires included with the motor power/brake connector.







(8) For TLP-A235-15K motors, you must build your own motor power cable to comply with NFPA 79 requirements.

Kinetix TLP Motor Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A rms	System Continuous Stall Torque N•m (lb•in)	System Peak Stall Current A rms	System Peak Stall Torque N•m (lb•in)	Motor Rated Output kW (Hp)	Kinetix 5100 Drives (230V AC input)
TLP-A046-005	3000	6000	0.70	0.16 (1.42)	2.286	0.447 (3.96)	0.05 (0.067)	2198-E1004-ERS
TLP-A046-010	3000	6000	0.96	0.32 (2.83)	3.370	1.034 (9.15)	0.10 (0.134)	2198-E1004-ERS
TLP-A070-020	3000	6000	1.65	0.64 (5.66)	5.500	2.160 (19.12)	0.20 (0.268)	2198-E1004-ERS
TLP-A070-040	3000	6000	2.60	1.22 (10.8)	6.500	2.91 (25.80)	0.38 (0.509)	2198-E1004-ERS
			2.70	1.27 (11.2)	9.500	4.275 (37.84)	0.40 (0.536)	2198-E1007-ERS
TLP-A090-075	3000	6000	4.50	2.39 (21.2)	15.41	7.505 (66.42)	0.75 (1.005)	2198-E1007-ERS
TLP-A100-100	3000	3000	4.31	3.18 (28.2)	12.37	8.740 (77.36)	1.0 (1.34)	2198-E1007-ERS
								2198-E1015-ERS
TLP-A115-100	3000	5000	7.45	3.18 (28.2)	23.70	8.455 (74.83)	1.0 (1.34)	2198-E1015-ERS
TLP-A115-200	3000	5000	12.50	6.37 (56.4)	40.58	17.48 (154.7)	2.0 (2.68)	2198-E1020-ERS
TLP-A145-050	2000	3000	3.26	2.39 (21.6)	9.180	6.81 (60.27)	0.50 (0.670)	2198-E1007-ERS
TLP-A145-090	1000	2000	7.90	8.30 (73.5)	21.80	20.52 (181.6)	0.87 (1.167)	2198-E1015-ERS
			8.12	8.59 (76.0)			0.90 (1.206)	2198-E1020-ERS
TLP-A145-100	2000	3000	6.11	4.77 (42.2)	19.73	13.30 (117.7)	1.0 (1.34)	2198-E1015-ERS
TLP-A145-150	2000	3000	7.90	6.22 (55.1)	23.70	15.92 (140.9)	1.3 (1.74)	2198-E1015-ERS
			8.80	7.16 (63.4)	29.13	19.66 (174.0)	1.5 (2.01)	2198-E1020-ERS
TLP-A145-250	3000	4500	15.32	7.96 (70.5)	55.95	24.51 (216.9)	2.5 (3.35)	2198-E2030-ERS
TLP-A200-200	2000	3000	12.30	9.55 (84.3)	33.66	21.85 (193.4)	2.0 (2.68)	2198-E1020-ERS
TLP-A200-300	1500	2500	17.90	16.81 (148.8)	55.95	45.62 (403.7)	2.6 (3.49)	2198-E2030-ERS
			20.25	19.10 (169.1)	57.50	47.03 (416.3)	3.0 (4.02)	2198-E2055-ERS
TLP-A200-350	2000	3000	22.16	16.71 (147.9)	65.40	43.23 (382.6)	3.5 (4.69)	2198-E2055-ERS
TLP-A200-450	1500	3000	37.07	28.65 (253.6)	91.40	64.04 (566.8)	4.5 (6.03)	2198-E2055-ERS
TLP-A200-550	1500	3000	41.13	35.01 (309.9)	91.40	67.67 (598.9)	5.5 (7.37)	2198-E2055-ERS
					108.0	79.96 (707.7)		2198-E2075-ERS
TLP-A200-750	1500	2500	49.0	45.36 (401.4)	127.5	104.30 (923.1)	7.1 (9.52)	2198-E2075-ERS
			49.80	47.74 (422.5)			7.5 (10.1)	2198-E2150-ERS
TLP-A235-11K	1500	2000	57.72	70.0 (619.6)	129.5	144.30 (1277)	11.0 (14.7)	2198-E2150-ERS
TLP-A235-15K	1500	2000	75.40	95.40 (844.4)	162.0	184.57 (1634)	15.0 (20.1)	2198-E2150-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

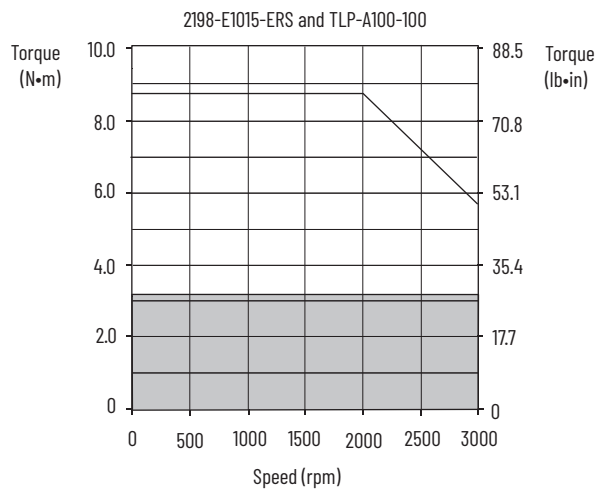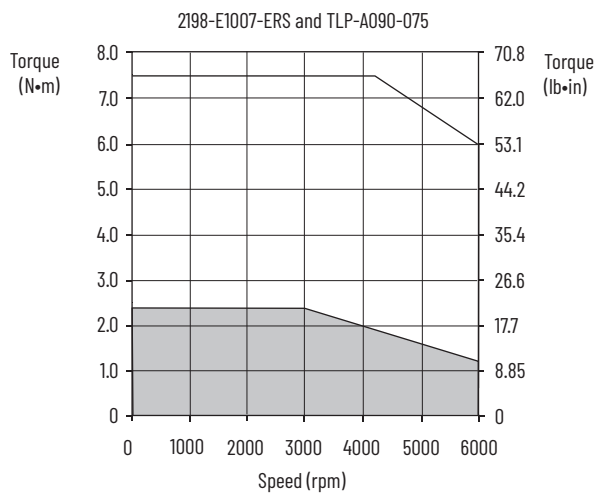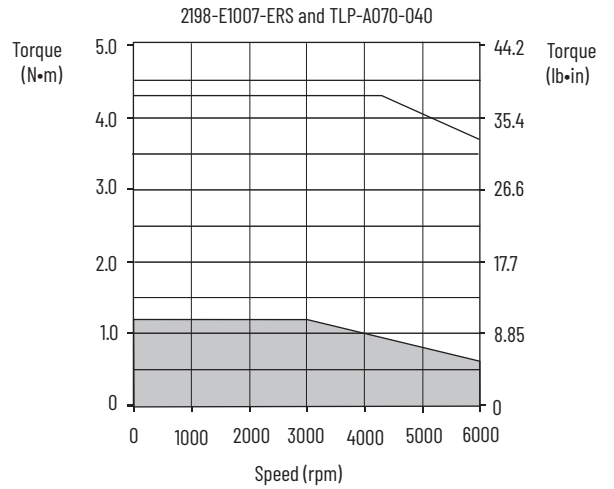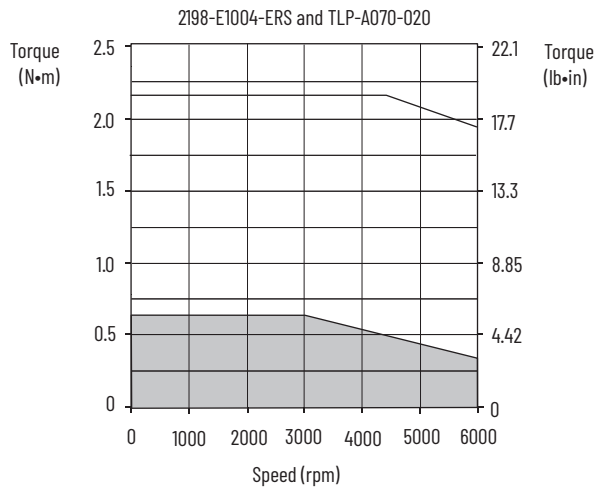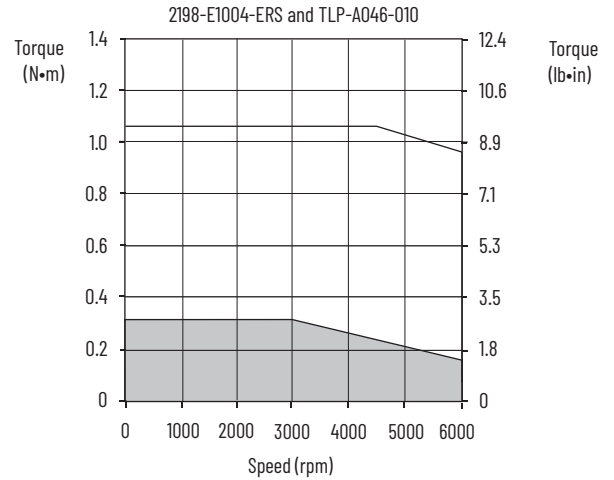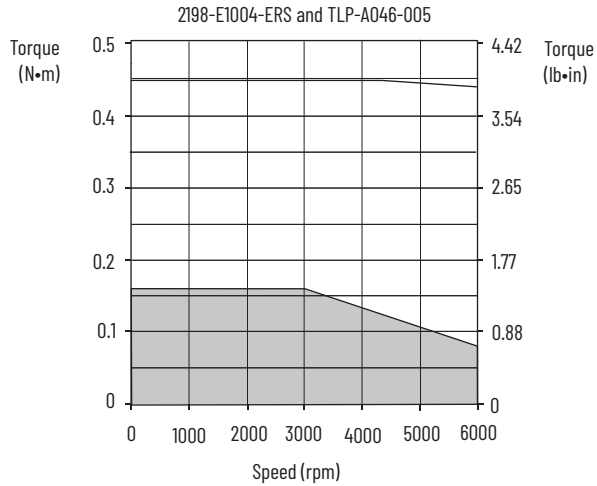

Kinetix 5100 (200V-class) Drives/Kinetix TLP Servo Motor Curves









= Intermittent operating region
 = Continuous operating region

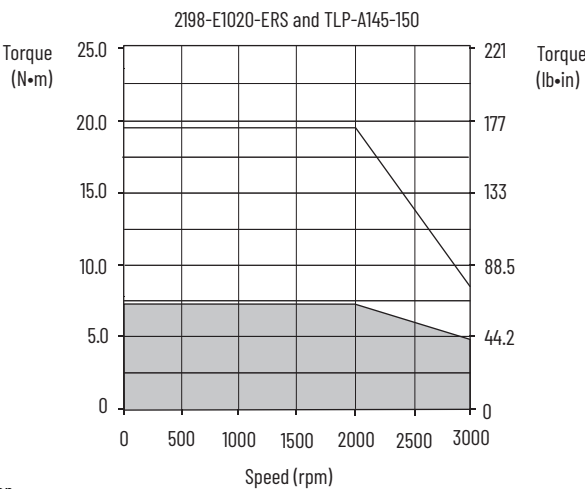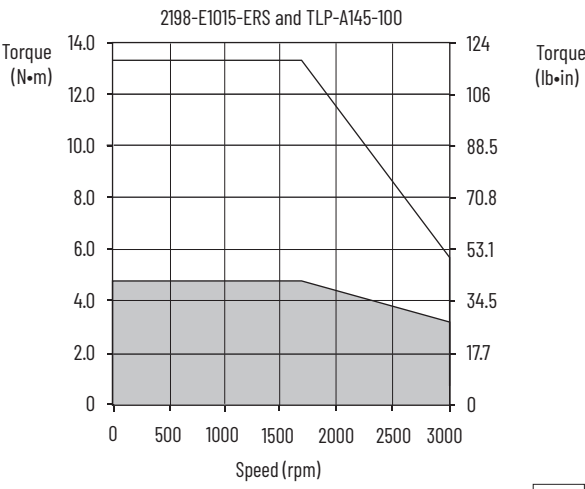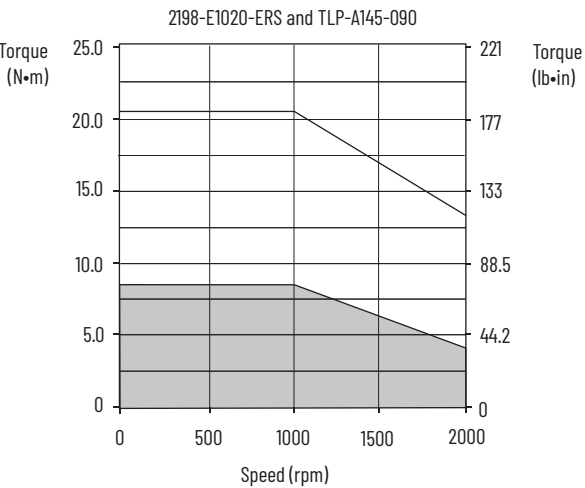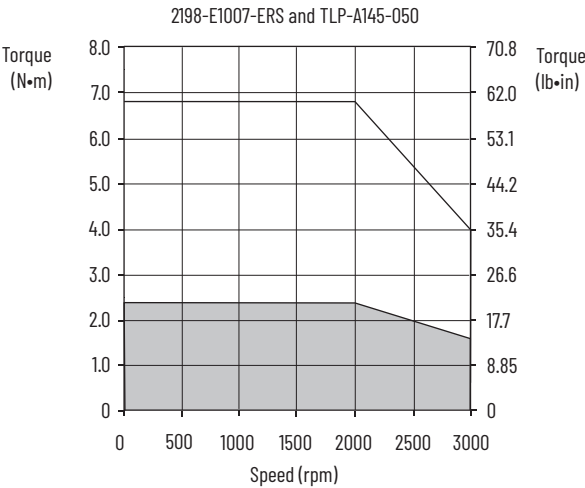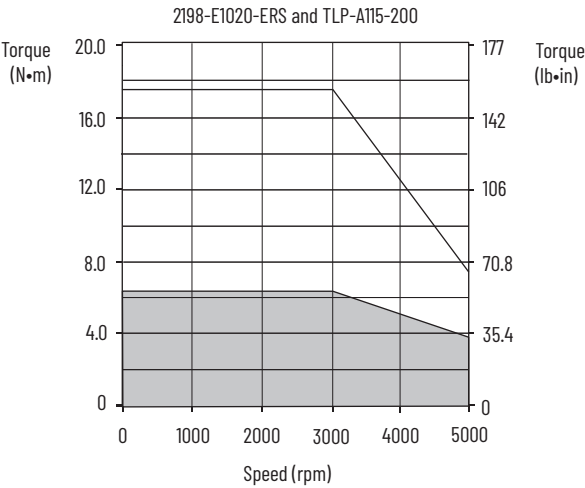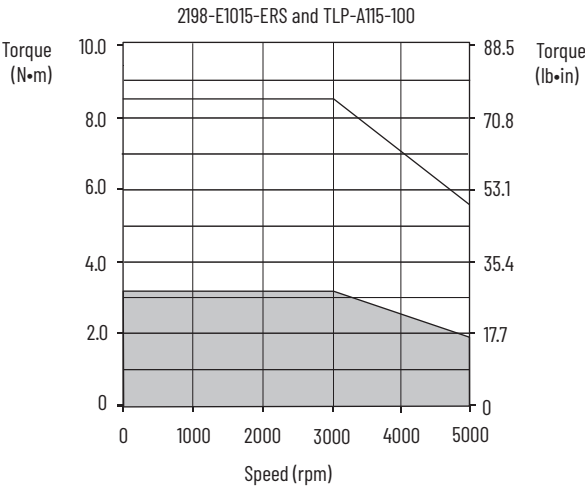Kinetix 5100 (200V-class) Drives/Kinetix TLP Servo Motor Curves (continued)






 = Intermittent operating region
 = Continuous operating region

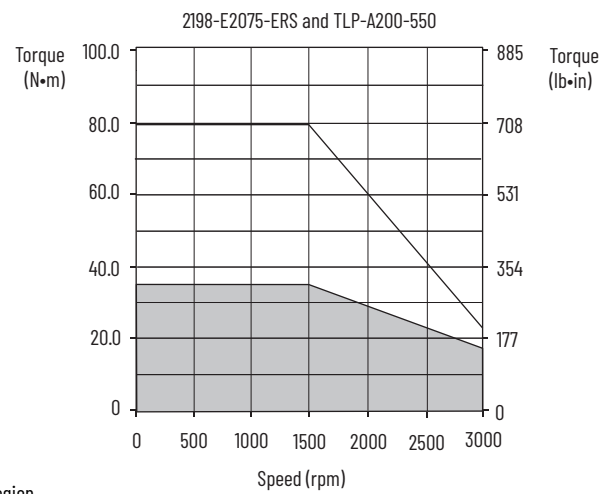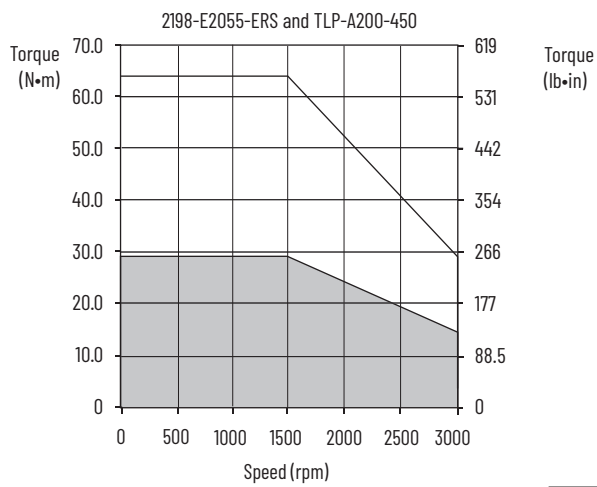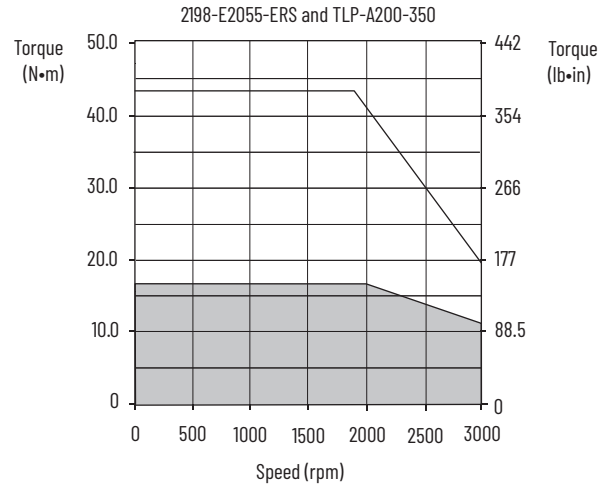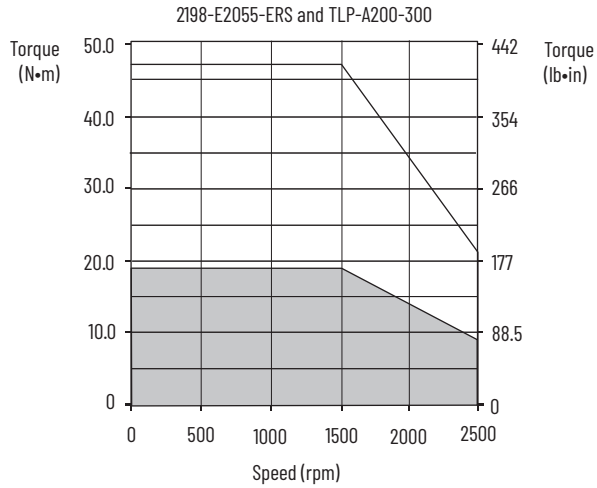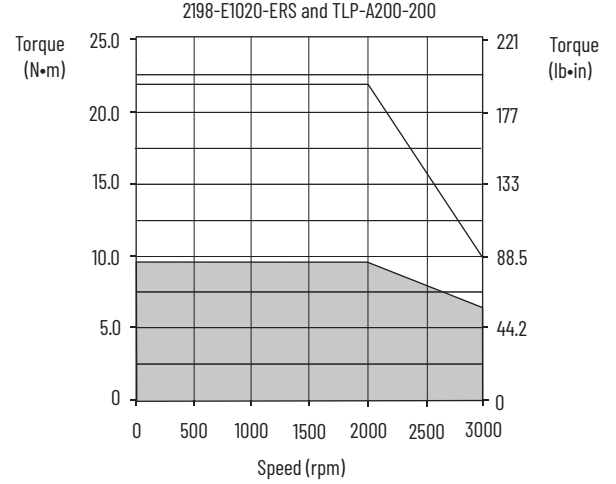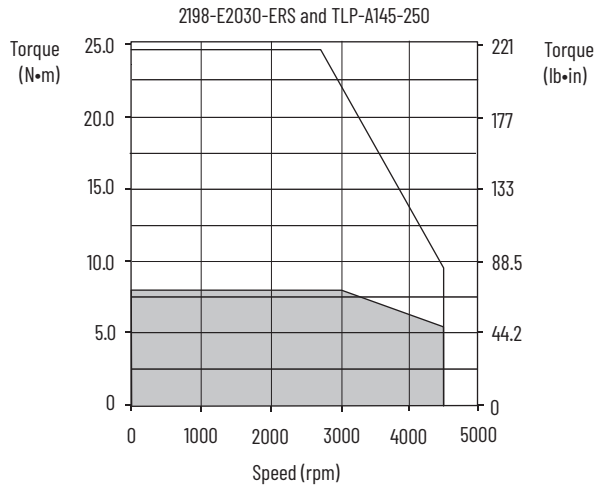

Kinetix 5100 (200V-class) Drives/Kinetix TLP Servo Motor Curves (continued)



= Intermittent operating region
 = Continuous operating region

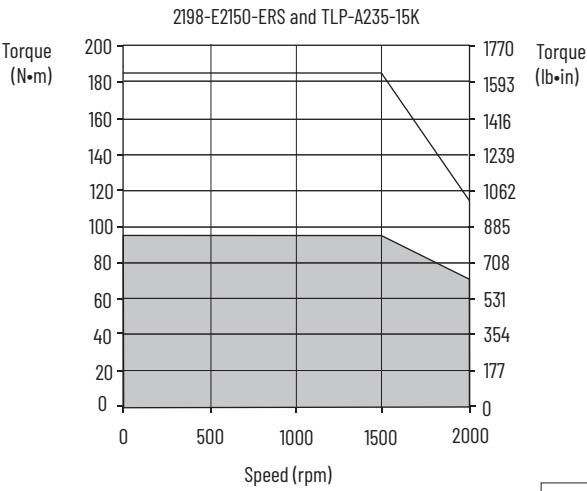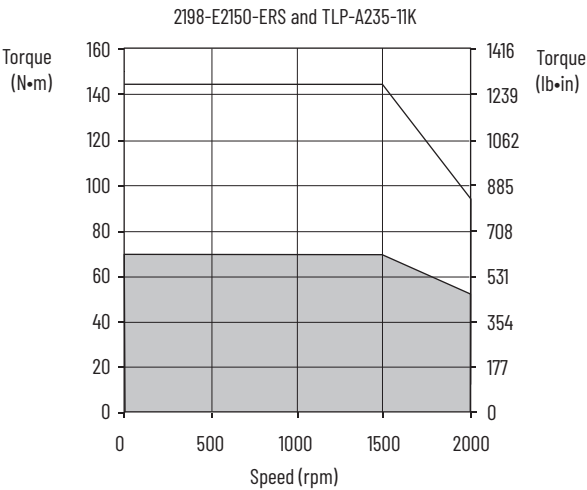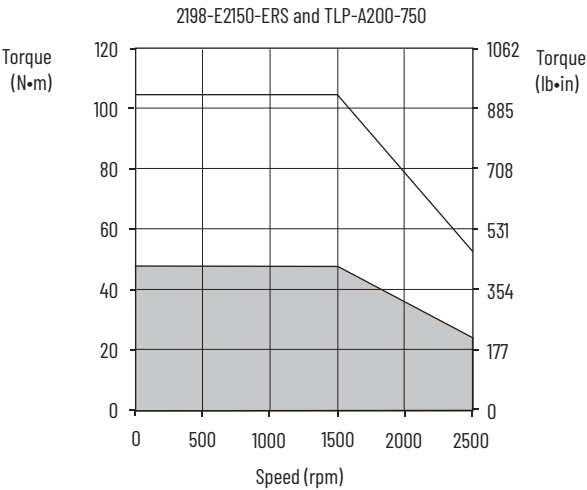Kinetix 5100 (200V-class) Drives/Kinetix TLP Servo Motor Curves (continued)



 = Intermittent operating region
 = Continuous operating region

Kinetix 5100 (400V-class) Drives with Kinetix TLP Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 380 or 480V, nominal input) when matched with Kinetix TLP (400V-class) multi-purpose servo motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and optimum torque/speed curves.

Kinetix TLP Motor and Cable Combinations

Rotary Motor (400V-class) ⁽¹⁾ Cat. No.	Motor Power/Brake Cable ⁽²⁾	Feedback Cable Cat. No. ⁽²⁾	Brake Cat. No. ⁽²⁾
TLP-B070-040 TLP-B090-075	2090-CTPx-MADF-18Axx (standard) or 2090-CTPx-MADF-18Fxx (continuous-flex)	2090-CTFB-MADD-CFAxx (standard) or 2090-CTFB-MADD-CFFxx (continuous-flex)	Not applicable. Brake conductors are included in the power cable.
TLP-B115-100, TLP-B115-200 ⁽³⁾ TLP-B145-050, TLP-B145-100 TLP-B145-150, TLP-B145-200	2090-CTPx-MCDF-16Axx (standard) or 2090-CTPx-MCDF-16Fxx (continuous-flex)	2090-CTFB-MFDD-CFAxx (standard) or 2090-CTFB-MFDD-CFFxx (continuous-flex)	
TLP-B145-250	2090-CTPx-MCDF-12Axx (standard) or 2090-CTPx-MCDF-12Fxx (continuous-flex)		
TLP-B200-300, TLP-B200-450	2090-CTPx-MDDF-12Axx (standard) or 2090-CTPx-MDDF-12Fxx (continuous-flex)		
TLP-B200-550, TLP-B200-750	2090-CTPx-MDDF-08Axx (standard) or 2090-CTPx-MDDF-08Fxx (continuous-flex)		
TLP-B235-11K, TLP-B235-14K ⁽⁴⁾	2090-CTPW-MEDF-06Axx (standard) or 2090-CTPW-MEDF-06Fxx (continuous-flex)		2090-CTBK-MBDF-20Axx (standard) or 2090-CTBK-MBDF-20Fxx (continuous-flex)

(1) The TLP-B070-040 and TLP-B090-075 frame on-motor cables include 18 AWG conductors that are compatible with 2090-CTPx-MADF-18xxx cable conductors.

(2) Refer to the Kinetix Motion Accessories Specifications Technical Data, publication [KNX-TD004](#), for cable specifications.

(3) For TLP-B115-200 motors, use 2090-CTPx-MCDF-12xxx motor power/brake cable to comply with NFPA 79 requirements.







(4) Only these motors have separate brake connectors and brake cables. All other motors have brake wires included with the motor power/brake connector.

Kinetix TLP Motor Performance Specifications with Kinetix 5100 (400V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A rms	System Continuous Stall Torque N•m (lb•in)	System Peak Stall Current A rms	System Peak Stall Torque N•m (lb•in)	Motor Rated Output kW (Hp)	Kinetix 5100 Drives (380/480V AC input)
TLP-B070-040	3000	6000	1.47	1.27 (11.2)	5.30	4.25 (37.6)	0.40 (0.54)	2198-E4004-ERS
TLP-B090-075	3000	6000	2.99	2.39 (21.2)	8.0	5.94 (52.5)	0.75 (1.01)	2198-E4007-ERS
					10.85	8.05 (71.2)		2198-E4015-ERS
TLP-B115-100	3000	5000	4.30	3.18 (28.1)	15.11	9.34 (82.7)	1.0 (1.34)	2198-E4015-ERS
TLP-B115-200	3000	5000	7.0	6.37 (56.4)	20.78	15.63 (138.3)	2.0 (2.68)	2198-E4020-ERS
					25.40	19.10 (169.0)		2198-E4030-ERS
TLP-B145-050	2000	3000	1.89	2.39 (21.2)	5.49	6.93 (61.3)	0.50 (0.67)	2198-E4007-ERS
TLP-B145-100	2000	3000	3.54	4.77 (42.2)	12.29	13.03 (115.3)	1.0 (1.34)	2198-E4015-ERS
TLP-B145-150	2000	3000	5.20	7.16 (63.4)	15.11	16.92 (149.8)	1.5 (2.01)	2198-E4015-ERS
					18.34	20.54 (181.8)		2198-E4020-ERS
TLP-B145-200	2000	3000	6.85	9.55 (84.5)	20.78	23.74 (210.2)	2.0 (2.68)	2198-E4020-ERS
					21.35	24.40 (215.9)		2198-E4030-ERS
TLP-B145-250	3000	4500	8.60	7.96 (70.4)	26.08	20.54 (181.7)	2.5 (3.35)	2198-E4030-ERS
					33.40	26.30 (232.8)		2198-E4055-ERS
TLP-B200-300	1500	2500	11.65	19.1 (169.0)	26.08	36.56 (323.5)	3.0 (4.02)	2198-E4030-ERS
					34.10	47.8 (423.0)		2198-E4055-ERS
TLP-B200-450	1500	3000	21.18	28.7 (254.0)	37.65	43.6 (385.6)	4.5 (6.03)	2198-E4055-ERS
					53.32	61.7 (546.1)		2198-E4075-ERS
					58.41	67.6 (598.3)		2198-E4150-ERS
TLP-B200-550	1500	3000	23.62	35.0 (309.8)	37.65	47.4 (419.3)	5.5 (7.38)	2198-E4055-ERS
					53.32	67.1 (546.1)		2198-E4075-ERS
					66.60	83.8 (741.6)		2198-E4150-ERS
TLP-B200-750	1500	2500	28.90	47.7 (422.1)	53.32	77.2 (682.9)	7.5 (10.06)	2198-E4075-ERS
					70.0	101.3 (896.5)		2198-E4150-ERS
TLP-B235-11K	1500	2000	29.60	70.0 (620.0)	70.0	158.5 (1403)	11.0 (14.75)	2198-E4150-ERS
TLP-B235-14K	1500	2000	40.30	89.1 (789.0)	70.0	143.6 (1271)	14.0 (18.77)	2198-E4150-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (400V-class) Drives/Kinetix TLP Servo Motor Curves

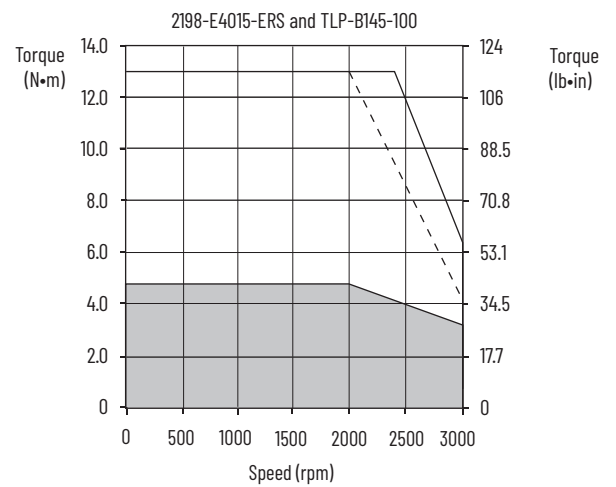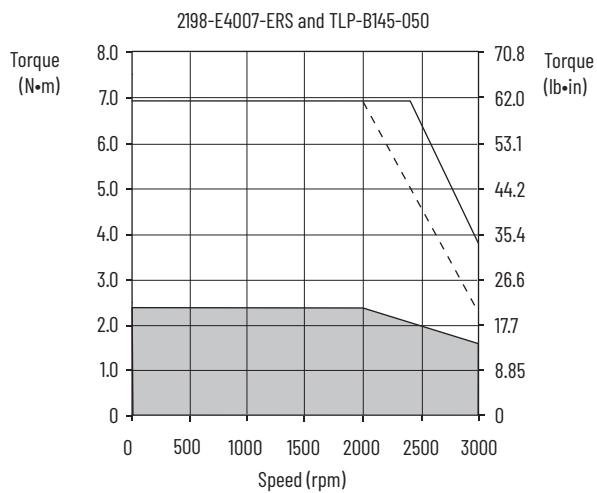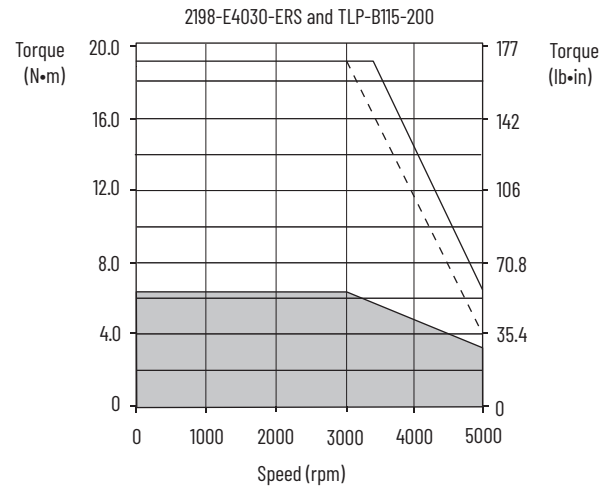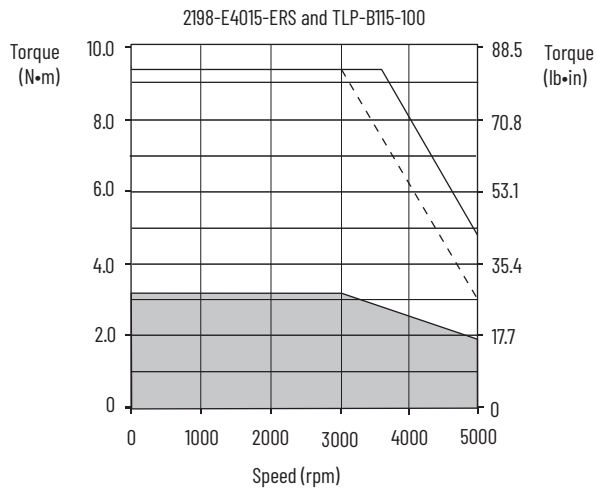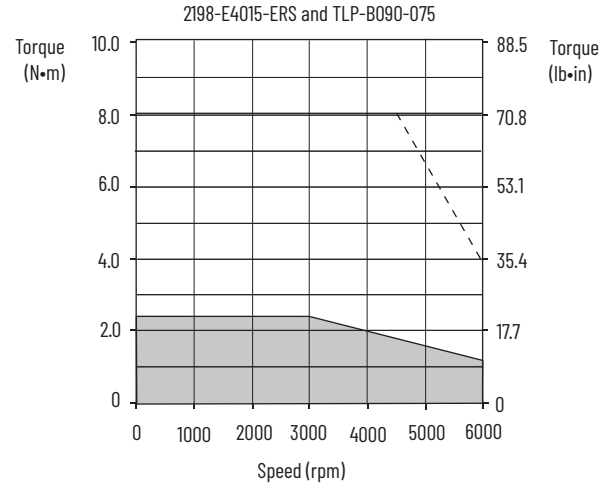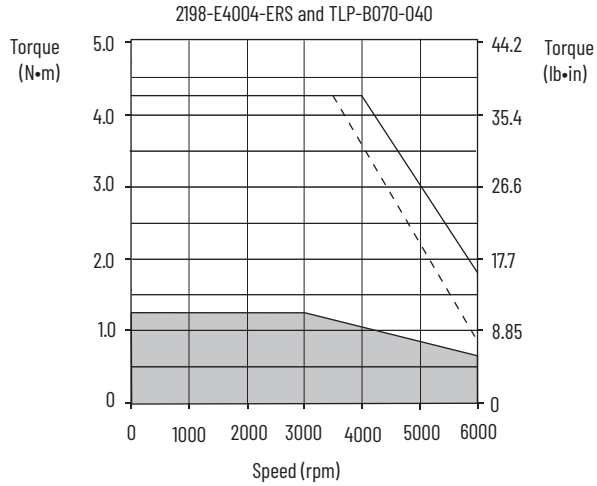




[] = Intermittent operating region
 [] = Continuous operating region
 [- -] = Drive operation with 380V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix TLP Servo Motor Curves (continued)

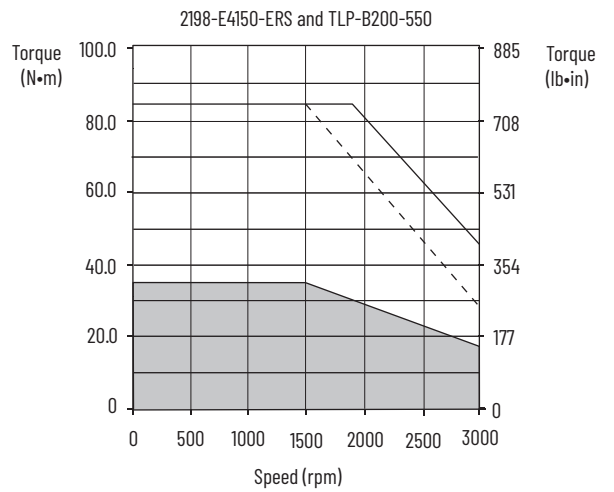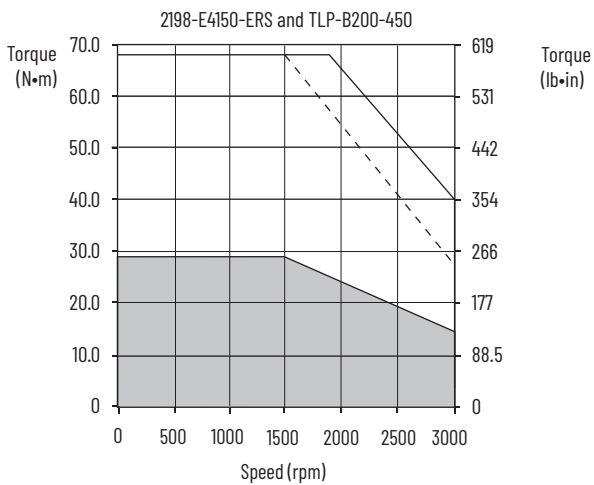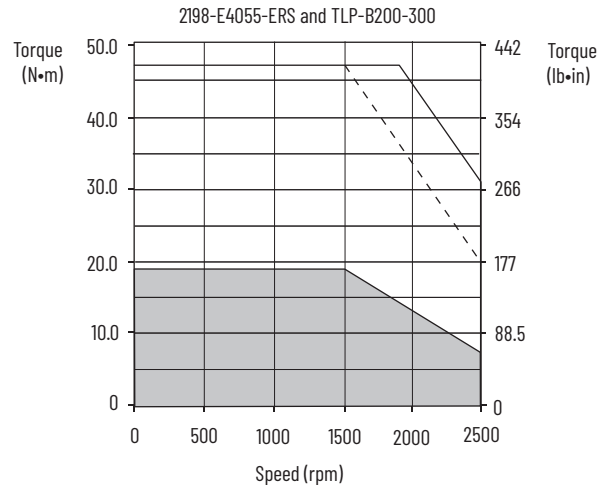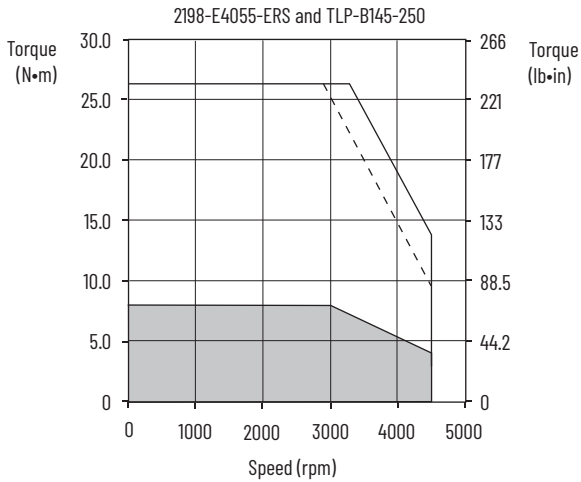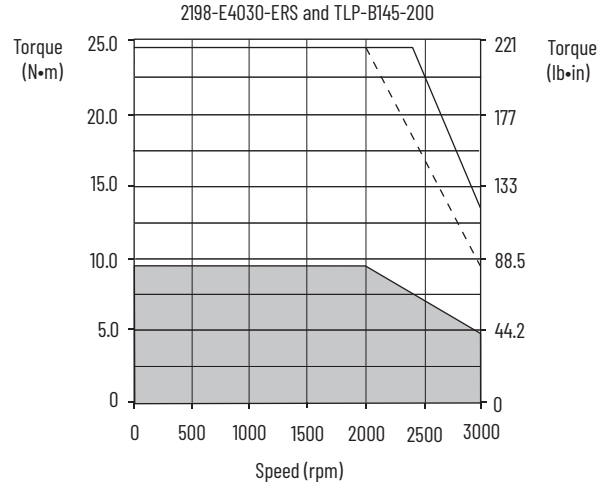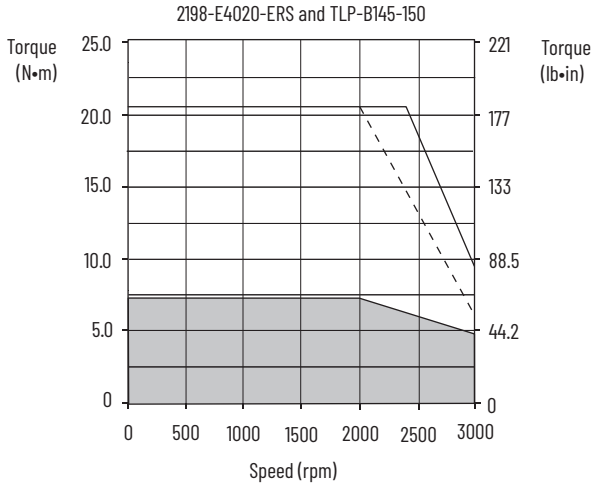

= Intermittent operating region
 = Continuous operating region
 = Drive operation with 380V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix TLP Servo Motor Curves (continued)

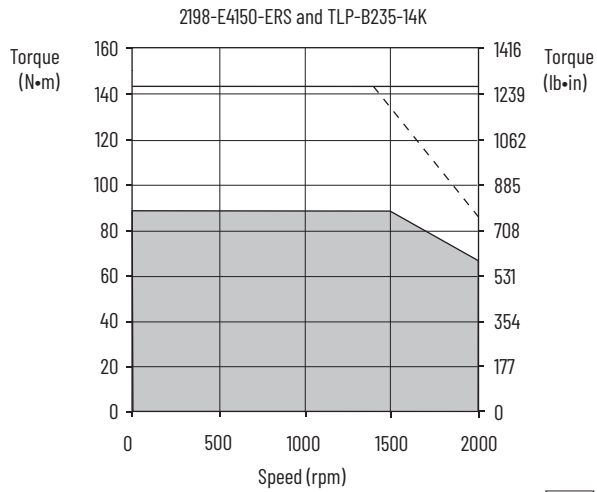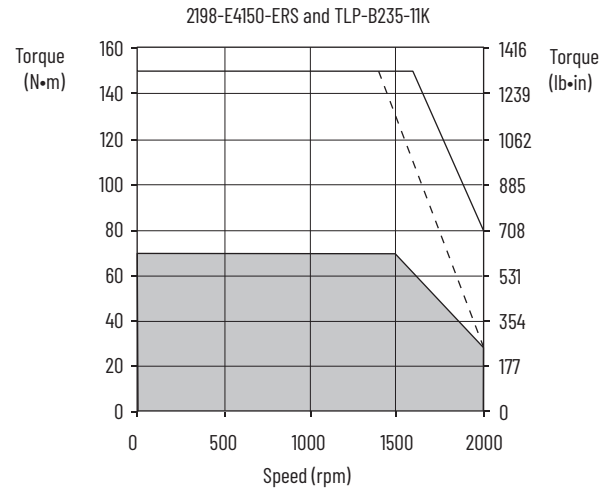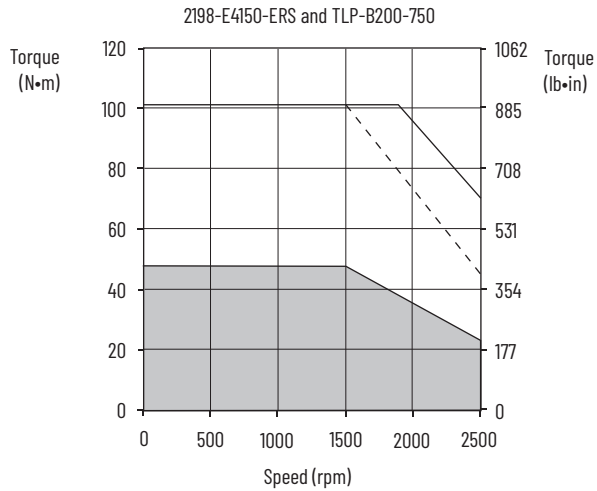

- = Intermittent operating region
- = Continuous operating region
- = Drive operation with 380V AC rms input voltage

Kinetix 5100 (200V-class) Drives with Kinetix MPL Motors

This section provides system combination information for the Kinetix 5100 drives (with 230V, nominal input) when matched with Kinetix MPL (200V-class) low-inertia servo motors with absolute high-resolution encoders or TTL incremental encoders. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

These system performance tables and torque/speed curves reflect single-phase and three-phase drive operation with 200V-class motors; however, only 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, and 2198-E1020-ERS drives are capable of single-phase operation.

IMPORTANT The Kinetix MPL low-inertia motors on this page are equipped with DIN connectors (specified by 7, for example, MPL-A310P-xx7xAA) and are **not** compatible with cables designed for motors equipped with bayonet connectors (specified by 2, for example, MPL-A310P-xx2xAA). The motors with bayonet connectors are discontinued and require 2090-XXNxMP (bayonet) cables. For help with migration or to select bayonet transition cables, contact your Rockwell Automation sales representative.

Kinetix MPL Motor and Cable Combinations

Rotary Motor (200V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPL-A1510V-xx7xAA, MPL-A1520U-xx7xAA, MPL-A1530U-xx7xAA	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or ⁽²⁾⁽³⁾ 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPL-A210V-xx7xAA, MPL-A220T-xx7xAA, MPL-A230P-xx7xAA		
MPL-A310F-xx7xAA, MPL-A310P-xx7xAA, MPL-A320H-xx7xAA, MPL-A320P-xx7xAA, MPL-A330P-xx7xAA		
MPL-A420P-xx7xAA, MPL-A430H-xx7xAA		
MPL-A4530F-xx7xAA, MPL-A4540C-xx7xAA		
MPL-A430P-xx7xAA	2090-CPxM7DF-14AAxx (standard, non-flex) 2090-CPxM7DF-14AFxx (continuous-flex)	2090-XXNFMF-Sxx (standard, non-flex) ⁽⁴⁾ 2090-CFBM7DF-CDAFxx (continuous-flex) Incremental Feedback
MPL-A4530K-xx7xAA, MPL-A4540F-xx7xAA	2090-CPxM7DF-12AAxx (standard, non-flex)	
MPL-A4560F-xx7xAA	2090-CPxM7DF-10AAxx (standard, non-flex) 2090-CPxM7DF-10AFxx (continuous-flex)	
MPL-A520K-xx7xAA	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AFxx (continuous-flex)	
MPL-A540K-xx7xAA, MPL-A560F-xx7xAA	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AFxx (continuous-flex)	

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).

(2) Applies to Kinetix 5100 drives and MPL-A3xxx-M/S...MPL-A5xxx-M/S motors with absolute high-resolution feedback.

(3) Applies to Kinetix 5100 drives and MPL-A15xxx-V/E...MPL-A2xxx-V/E motors with absolute high-resolution feedback.

(4) Applies to Kinetix 5100 drives and MPL-A15xxx-H...MPL-A45xxx-H motors with incremental feedback.







For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPL Motor Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
MPL-A1510V	8000	8000	1.05	0.26 (2.3)	3.40	0.77 (6.8)	0.16	2198-E1004-ERS
MPL-A1520U	7000	7000	1.80	0.49 (4.3)	6.10	1.58 (13.9)	0.27	2198-E1004-ERS
MPL-A1530U	7000	7000	2.82	0.90 (8.0)	9.19	2.57 (22.7)	0.39	2198-E1004-ERS
					10.1	2.82 (24.9)		2198-E1007-ERS
MPL-A210V	8000	8000	3.09	0.55 (4.8)	9.19	1.37 (12.1)	0.37	2198-E1004-ERS
					10.2	1.52 (13.4)		2198-E1007-ERS
MPL-A220T	6000	6000	4.54	1.61 (14.2)	15.5	4.74 (41.9)	0.62	2198-E1007-ERS
MPL-A230P	5000	5000	5.40	2.10 (18.6)	21.79	7.77 (68.8)	0.86	2198-E1007-ERS
					23.0	8.2 (73.0)		2198-E1015-ERS
MPL-A310F	3000	3000	3.20	1.58 (14.0)	9.19	3.61 (31.9)	0.46	2198-E1004-ERS
MPL-A310P	5000	5000	4.85	1.58 (14.0)	14.0	3.61 (31.9)	0.73	2198-E1007-ERS
MPL-A320H	3500	3500	6.10	3.05 (27.0)	19.3	7.91 (70.0)	1.0	2198-E1007-ERS
MPL-A320P	5000	5000	9.00	3.05 (27.0)	29.5	7.91 (70.0)	1.3	2198-E1015-ERS
MPL-A330P	5000	5000	12.0	4.18 (37.0)	38.0	11.1 (98.2)	1.8	2198-E1020-ERS
MPL-A420P	5000	5000	12.7	4.79 (42.3)	46.0	13.5 (120)	2.0	2198-E1020-ERS
MPL-A430H	3500	3500	12.2	6.21 (55.0)	45.0	19.8 (175)	1.8	2198-E1020-ERS
MPL-A430P	5000	5000	16.80	5.99 (52.9)	57.39	16.96 (150)	2.2	2198-E1020-ERS
					67.0	19.8 (175)		2198-E2030-ERS
MPL-A4530F	2800	2800	13.40	8.36 (74.0)	42.0	20.3 (179)	1.9	2198-E1020-ERS
MPL-A4530K	4000	4000	19.50	8.13 (71.9)	62.0	20.3 (179)	2.5	2198-E2030-ERS
MPL-A4540C	1500	1500	9.40	10.30 (91.1)	29.0	27.1 (239)	1.5	2198-E1015-ERS
MPL-A4540F	3000	3000	18.40	10.19 (90.1)	57.39	27.1 (239)	2.6	2198-E1020-ERS
MPL-A4560F	3000	3000	22.0	14.1 (125)	66.0	34.4 (305)	3.0	2198-E2030-ERS
MPL-A520K	4000	4000	23.0	10.77 (95.2)	65.0	24.3 (215)	3.5	2198-E2030-ERS
MPL-A540K	4000	4000	41.5	19.42 (171)	120.0	48.6 (430)	5.5	2198-E2055-ERS
MPL-A560F	3000	3000	42.0	27.39 (242)	120.0	61.0 (540)	5.3	2198-E2055-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (200V-class) Drives/Kinetix MPL Servo Motor Curves

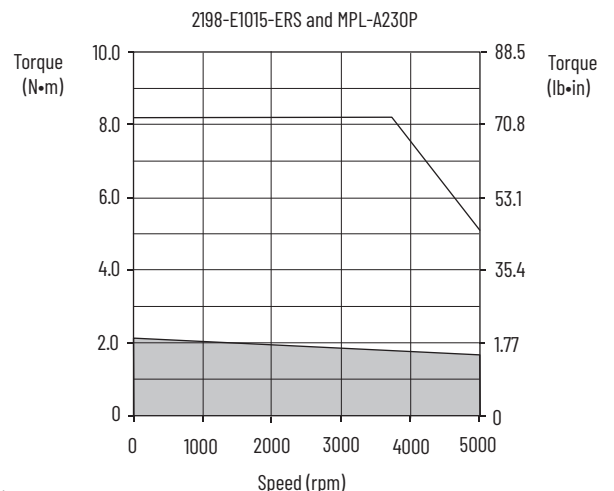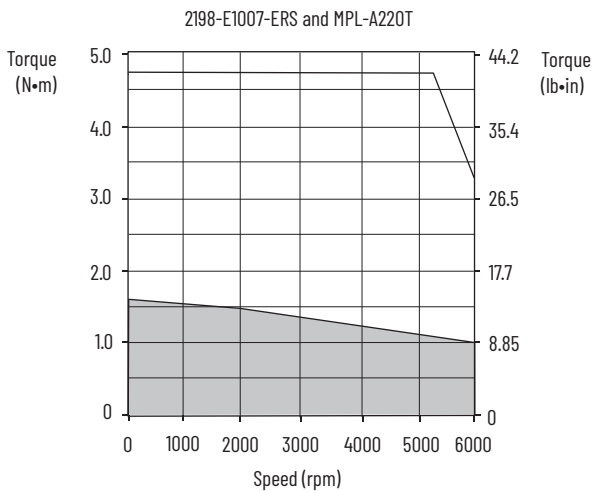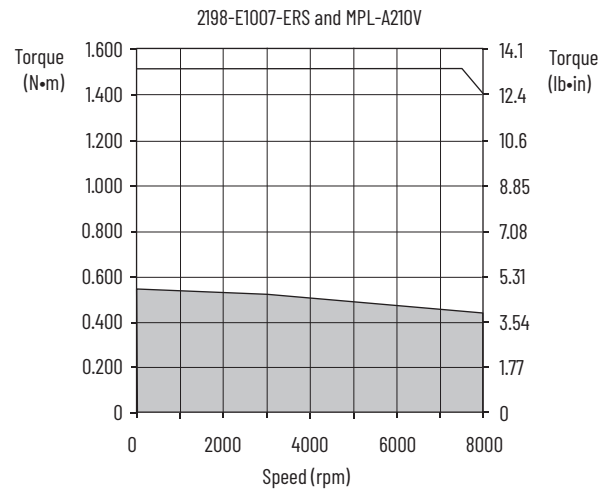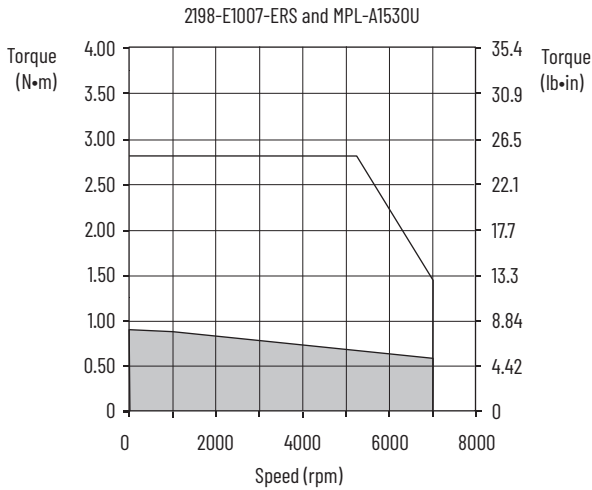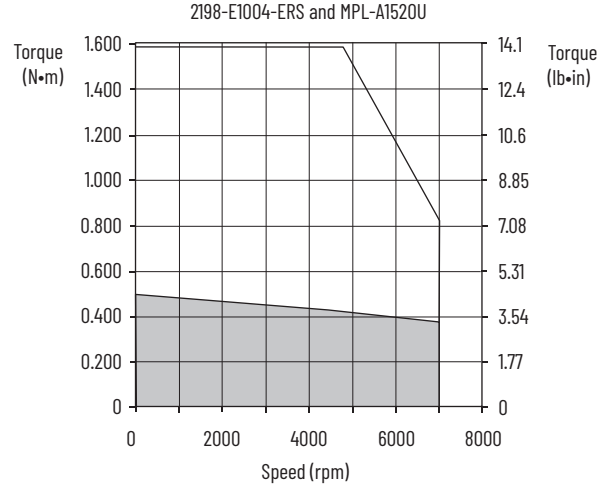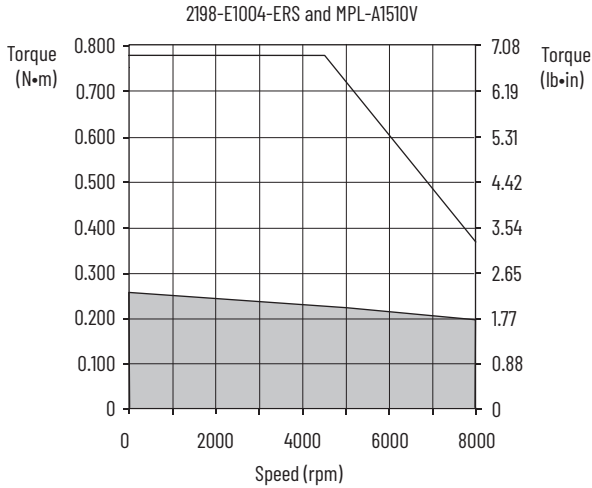


= Intermittent operating region
 = Continuous operating region

Kinetix 5100 (200V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

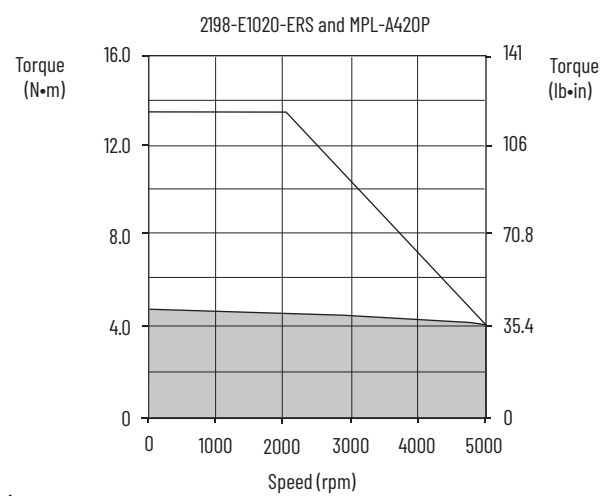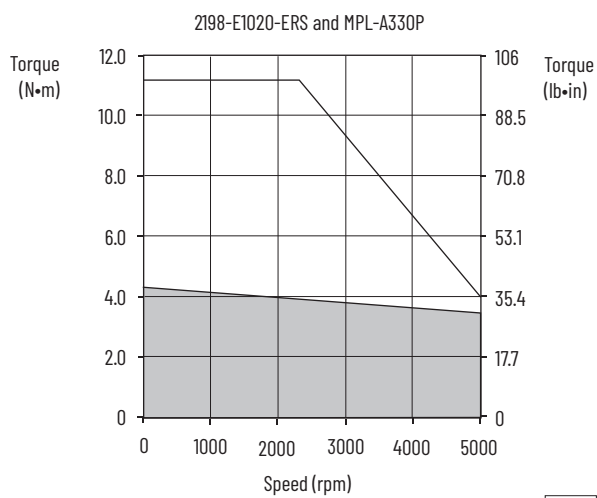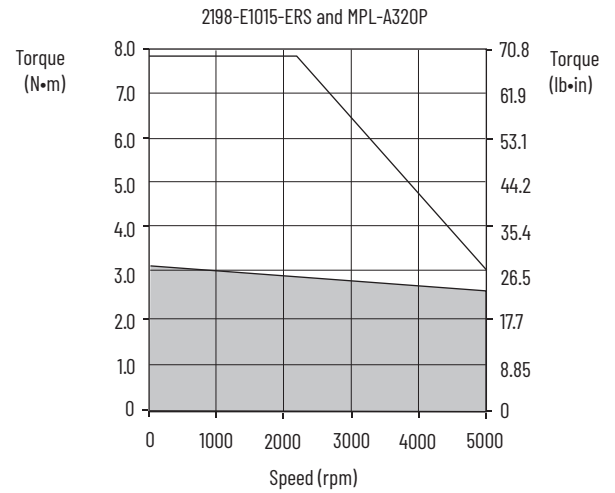
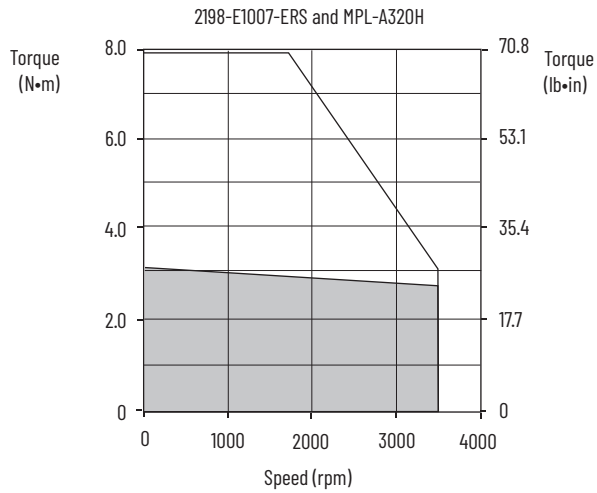
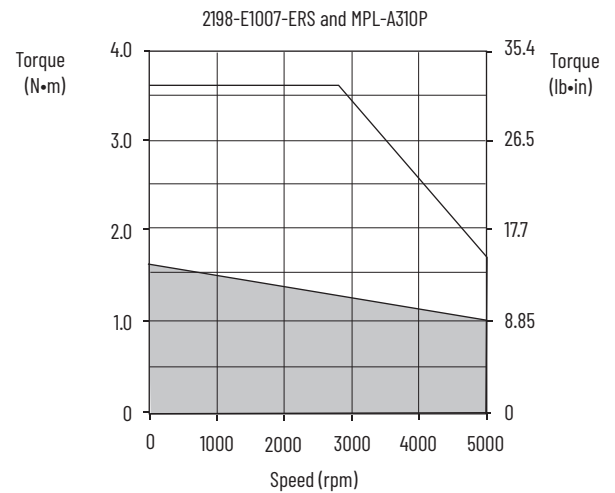
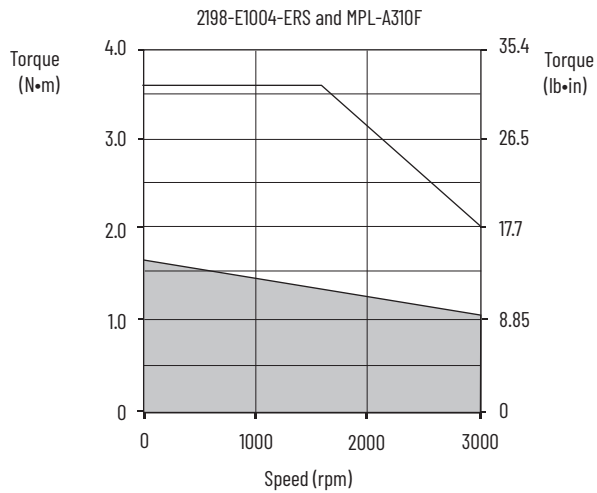


= Intermittent operating region
 = Continuous operating region

Kinetix 5100 (200V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

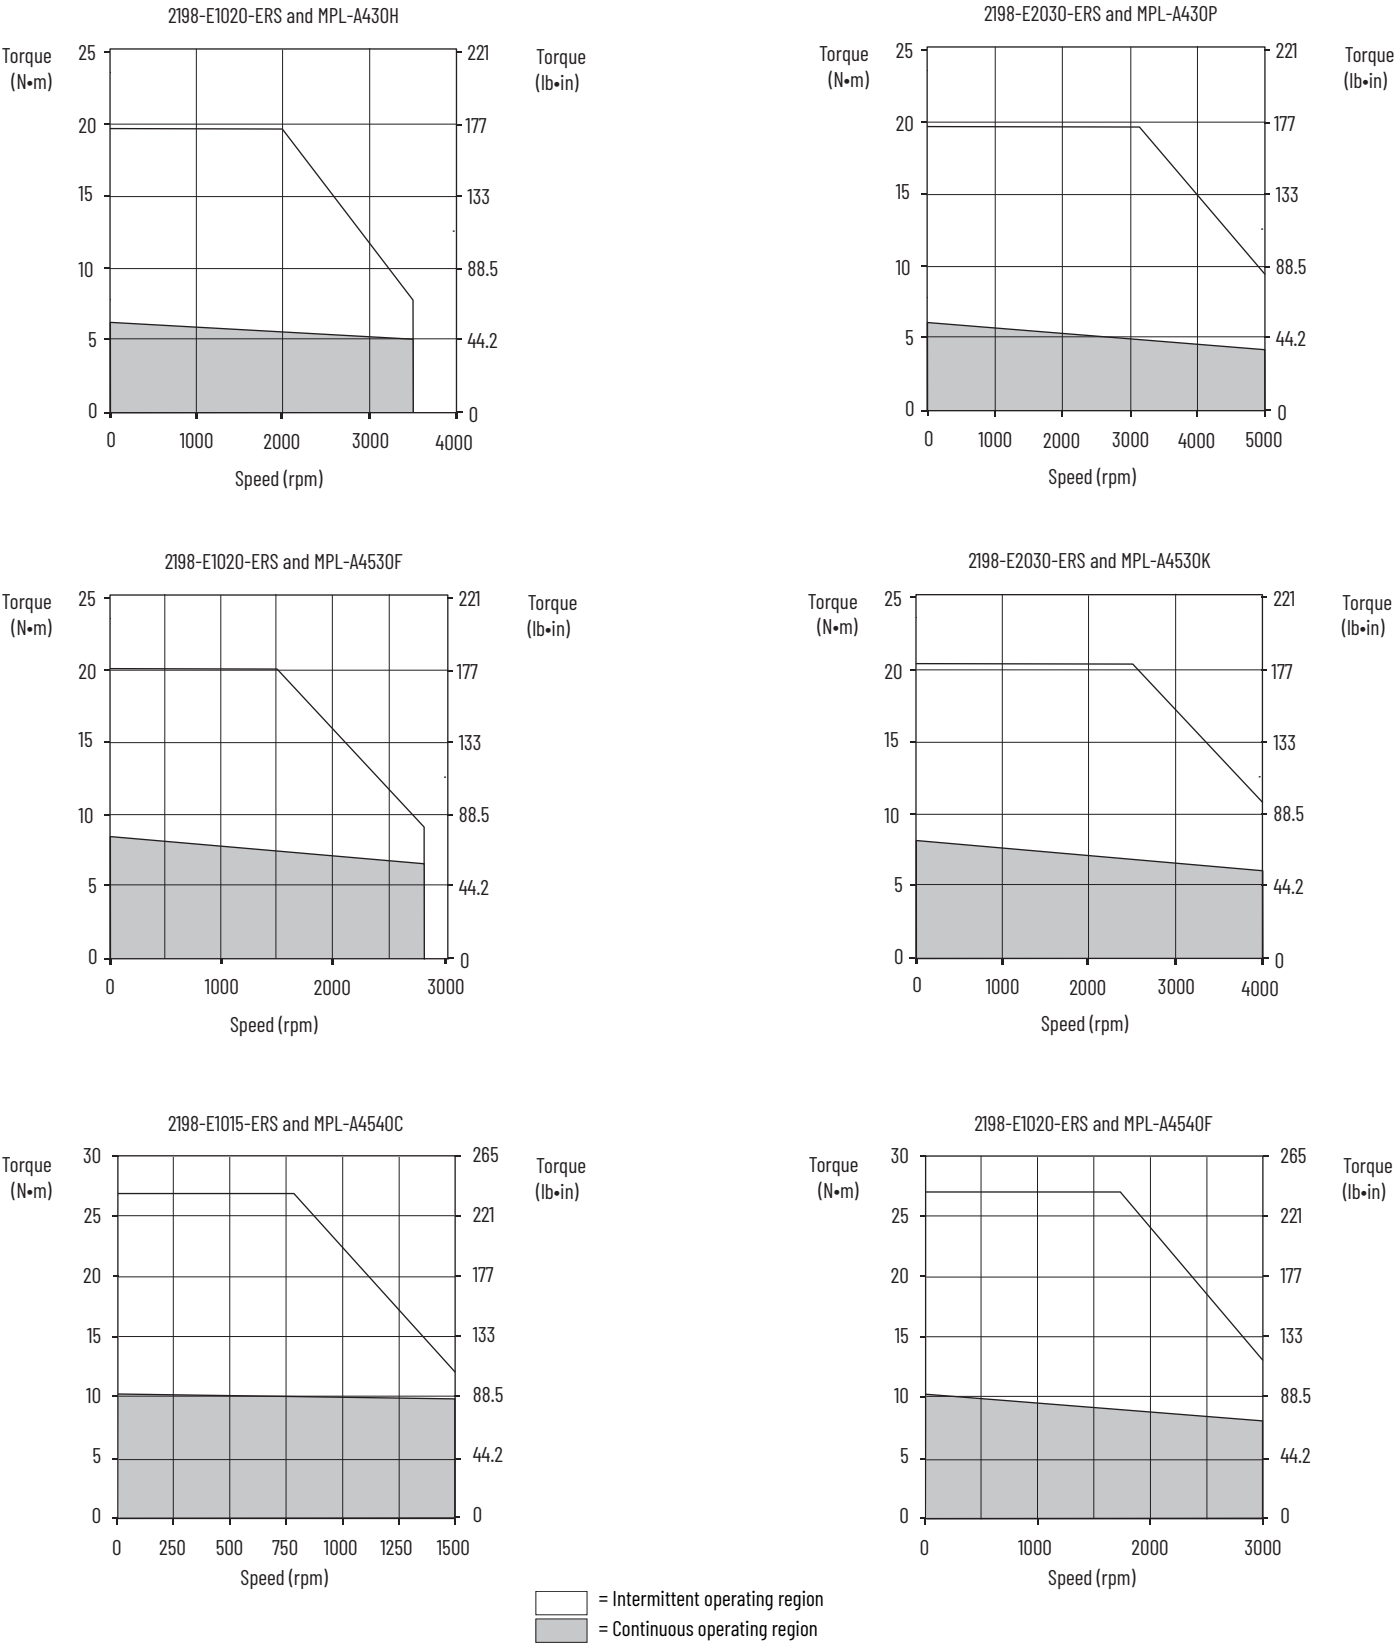

Kinetix 5100 (200V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

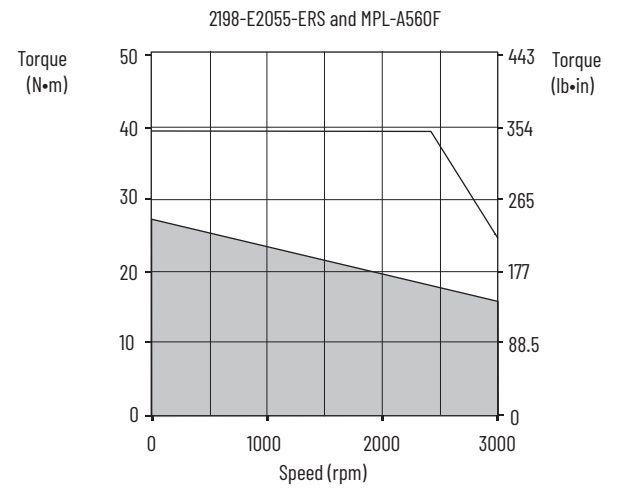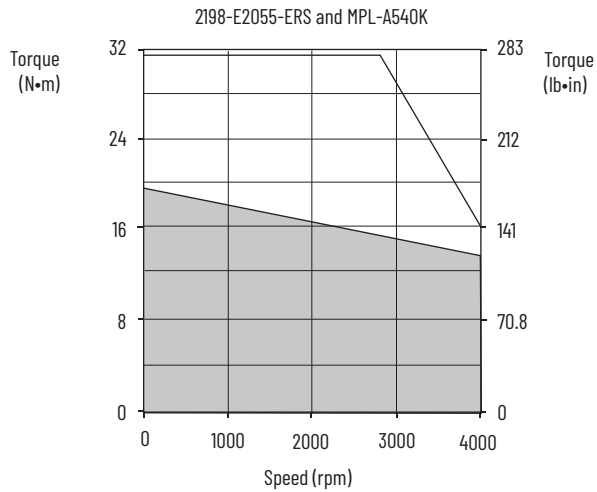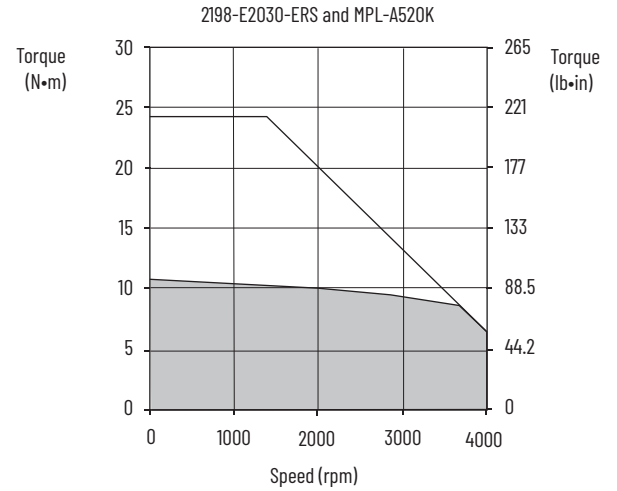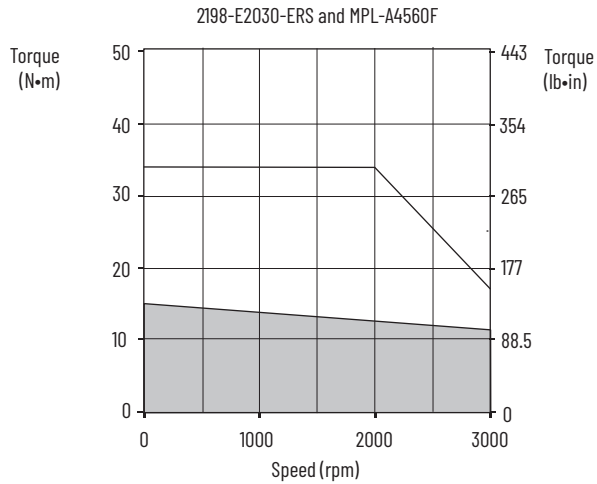

□ = Intermittent operating region
 ■ = Continuous operating region

Kinetix 5100 (400V-class) Drives with Kinetix MPL Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 400 and 480V, nominal input) when matched with Kinetix MPL (400V-class) low-inertia motors with absolute high-resolution encoders. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

IMPORTANT The Kinetix MPL motors on this page are equipped with DIN connectors (specified by 7, for example, MPL-A310P-xx7xAA) and are **not** compatible with cables designed for motors equipped with bayonet connectors (specified by 2, for example, MPL-A310P-xx2xAA). The motors with bayonet connectors are discontinued and require 2090-XXNxMP (bayonet) cables. For help with migration or to select bayonet transition cables, contact your Rockwell Automation sales representative.

Kinetix MPL Motor Cable Combinations

Rotary Motor (400V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPL-B1510V-xx7xAA, MPL-B1520U-xx7xAA, MPL-B1530U-xx7xAA	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or ^{(2) (3)} 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPL-B210V-xx7xAA, MPL-B220T-xx7xAA, MPL-B230P-xx7xAA		
MPL-B310P-xx7xAA, MPL-B320P-xx7xAA, MPL-B330P-xx7xAA		
MPL-B420P-xx7xAA, MPL-B430P-xx7xAA		
MPL-B4530F-xx7xAA, MPL-B4530K-xx7xAA, MPL-B4540F-xx7xAA, MPL-B4560F-xx7xAA		
MPL-B520K-xx7xAA	2090-CPxM7DF-14AAxx (standard, non-flex) 2090-CPxM7DF-14AFxx (continuous-flex)	2090-XXNFMF-Sxx (standard, non-flex) ⁽⁴⁾ 2090-CFBM7DF-CDAFxx (continuous-flex) Incremental Feedback
MPL-B540D-xx7xAA, MPL-B540K-xx7xAA, MPL-B560F-xx7xAA		
MPL-B580F-xx7xAA, MPL-B580J-xx7xAA, MPL-B640F-xx7xAA	2090-CPxM7DF-10AAxx (standard, non-flex) 2090-CPxM7DF-10AFxx (continuous-flex)	2090-XXNFMF-Sxx (standard, non-flex) ⁽⁴⁾ 2090-CFBM7DF-CDAFxx (continuous-flex) Incremental Feedback
MPL-B660F-xx7xAA, MPL-B680D-xx7xAA MPL-B960B-xx7xAA, MPL-B980B-xx7xAA	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AAxx (continuous-flex)	
MPL-B680F-xx7xAA, MPL-B680H-xx7xAA, MPL-B860D-xx7xAA, MPL-B880C-xx7xAA MPL-B960C-xx7xAA	2090-CPxM7DF-06AAxx (standard, non-flex) 2090-CPxM7DF-06AAxx (continuous-flex)	
MPL-B880D-xx7xAA MPL-B980C-xx7xAA	2090-CPxM7DF-04AAxx (standard, non-flex) 2090-CPxM7DF-04AAxx (continuous-flex)	

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).

(2) Applies to Kinetix 5100 drives and MPL-B3xxx-M/S...MPL-B9xxx-M/S motors with absolute high-resolution feedback.

(3) Applies to Kinetix 5100 drives and MPL-B15xxx-V/E...MPL-B2xxx-V/E motors with absolute high-resolution feedback.

(4) Applies to Kinetix 5100 drives and MPL-B15xxx-H...MPL-B45xxx-H motors with incremental feedback.







For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPL Motor Performance Specifications with Kinetix 5100 (400V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Maximum Speed rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (480V AC input)
MPL-B1510V	8000	8000	0.95	0.26 (2.3)	3.10	0.77 (6.8)	0.16	2198-E4004-ERS
MPL-B1520U	7000	7000	1.80	0.49 (4.3)	6.10	1.58 (13.9)	0.27	2198-E4004-ERS
MPL-B1530U	7000	7000	2.0	0.90 (8.0)	7.20	2.82 (24.9)	0.39	2198-E4004-ERS
MPL-B210V	8000	8000	1.75	0.55 (4.9)	5.80	1.52 (13.4)	0.37	2198-E4004-ERS
MPL-B220T	6000	6000	3.30	1.61 (14.2)	11.3	4.74 (41.9)	0.62	2198-E4007-ERS
MPL-B230P	5000	5000	2.60	2.10 (18.6)	11.3	8.20 (73.0)	0.86	2198-E4007-ERS
MPL-B310P	5000	5000	2.4	1.6 (14.1)	7.10	3.6 (32.0)	0.77	2198-E4007-ERS
MPL-B320P	5000	5000	4.5	3.10 (27)	11.3	6.6 (58.4)	1.5	2198-E4007-ERS
					14.0	8.2 (72.5)		2198-E4015-ERS
MPL-B330P	5000	5000	6.1	4.18 (37)	19.0	11.1 (98.2)	1.8	2198-E4015-ERS
MPL-B420P	5000	5000	6.4	4.74 (42)	21.4	13.1 (116)	1.9	2198-E4015-ERS
					22.0	13.5 (119)		2198-E4020-ERS
MPL-B430P	5000	5000	9.2	6.55 (58)	29.4	18.2 (161)	2.2	2198-E4020-ERS
					32.0	19.8 (175)		2198-E4030-ERS
MPL-B4530F	3000	3000	7.0	8.25 (73)	21.0	20.3 (180)	2.1	2198-E4015-ERS
MPL-B4530K	4000	4000	11.0	8.25 (73)	31.0	20.3 (179)	2.6	2198-E4030-ERS
MPL-B4540F	3000	3000	9.1	10.20 (90)	29.0	27.1 (240)	2.6	2198-E4020-ERS
MPL-B4560F	3000	3000	11.8	14.0 (124)	36.0	34.4 (304)	3.2	2198-E4030-ERS
MPL-B520K	3500	4000	11.5	10.7 (95)	33.0	23.2 (205)	3.5	2198-E4030-ERS
MPL-B540D	2000	2000	10.5	19.4 (172)	23.0	41.0 (362)	3.4	2198-E4020-ERS
MPL-B540K	4000	4000	20.5	19.4 (172)	53.2	43.1 (381)	5.4	2198-E4055-ERS
					60.0	48.6 (430)		2198-E4075-ERS
MPL-B560F	3000	3000	20.6	26.8 (237)	53.2	53.0 (469)	5.5	2198-E4055-ERS
					68.0	67.8 (600)		2198-E4075-ERS
MPL-B580F	3000	3000	26.0	34.0 (301)	53.2	49.2 (435)	7.1	2198-E4055-ERS
					94.0	87.0 (770)		2198-E4150-ERS
MPL-B580J	3800	3800	32.0	34.0 (301)	53.2	45.8 (405)	7.9	2198-E4055-ERS
					94.0	81.0 (717)		2198-E4150-ERS
MPL-B640F	2000	3000	32.1	36.7 (325)	53.2	59.2 (524)	6.1	2198-E4055-ERS
					65.0	72.3 (640)		2198-E4075-ERS
MPL-B660F	2000	3000	38.5	48.0 (425)	75.4	79.4 (703)	6.1	2198-E4075-ERS
					96.0	101.1 (895)		2198-E4150-ERS
MPL-B680D	2000	2000	34.0	62.8 (556)	53.2	87.3 (772)	9.3	2198-E4055-ERS
					94.0	154.2 (1365)		2198-E4150-ERS
MPL-B680F	2000	3000	48.0	60.0 (531)	96.0	108.5 (960)	7.5	2198-E4150-ERS
MPL-B680H	2000	3500	51.0	60.0 (531)	140	146.9 (1300)	7.5	2198-E4150-ERS
MPL-B860D	2000	2000	47.5	83.0 (735)	95.5	152.5 (1350)	12.5	2198-E4150-ERS
MPL-B880C	1500	1500	47.5	110 (973)	97.5	203 (1797)	12.6	2198-E4150-ERS
MPL-B880D	2000	2000	67.0	110 (973)	96.0	147 (1301)	12.6	2198-E4150-ERS
MPL-B960B	1200	1200	42.5	130 (1150)	75.4	185 (1640)	12.7	2198-E4075-ERS
					94.0	231 (2044)		2198-E4150-ERS
MPL-B960C	1500	1500	55.0	124.3 (1100)	125	226 (2000)	14.8	2198-E4150-ERS
MPL-B980B	1000	1000	40.0	162.7 (1444)	75.4	223 (1973)	15.2	2198-E4075-ERS
					94.0	278 (2460)		2198-E4150-ERS
MPL-B980C	1500	1500	68.2	158.2 (1400)	140	271.2 (2400)	16.8	2198-E4150-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves

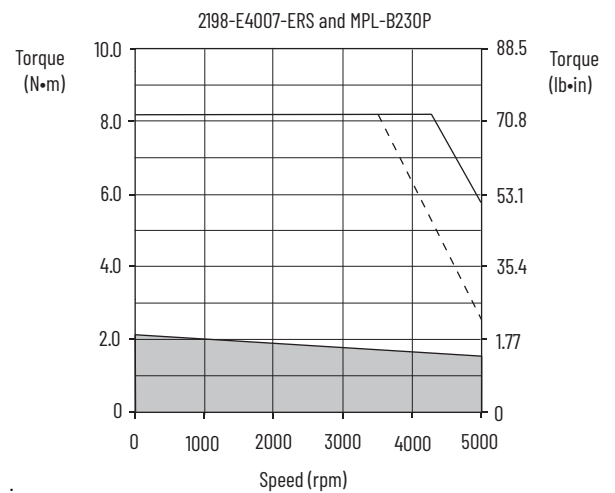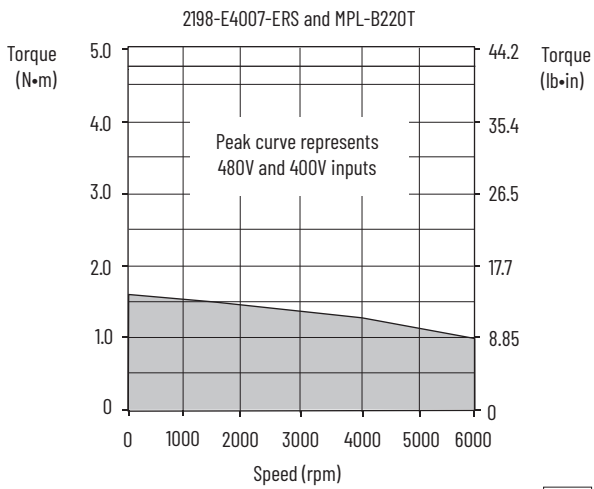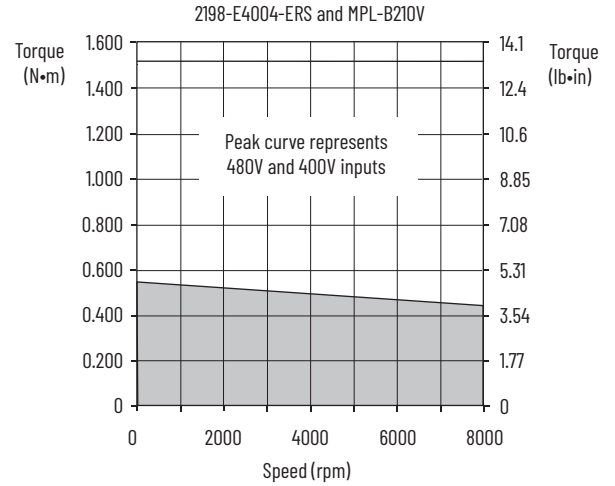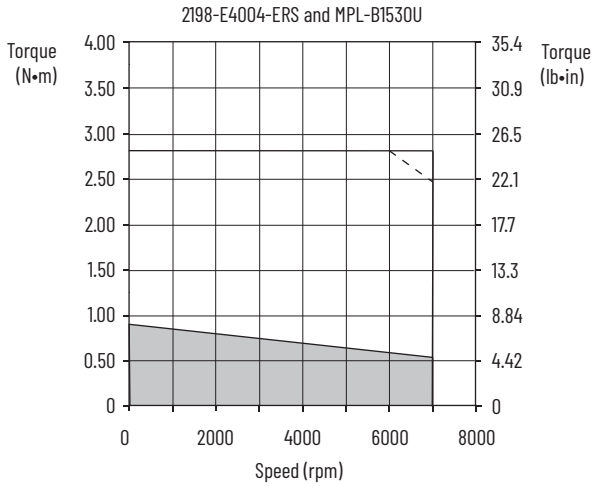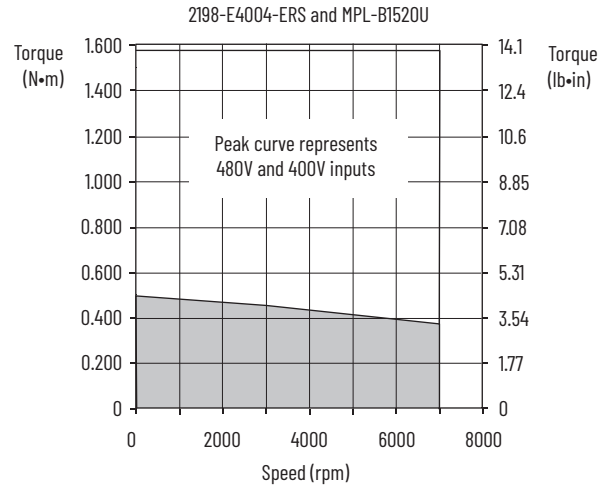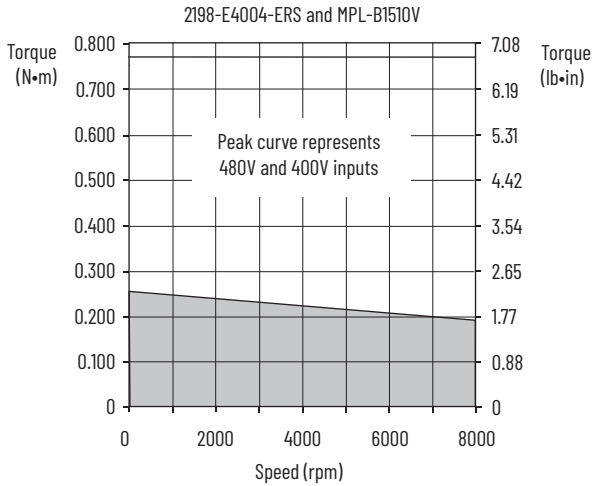


- = Intermittent operating region
- = Continuous operating region
- = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

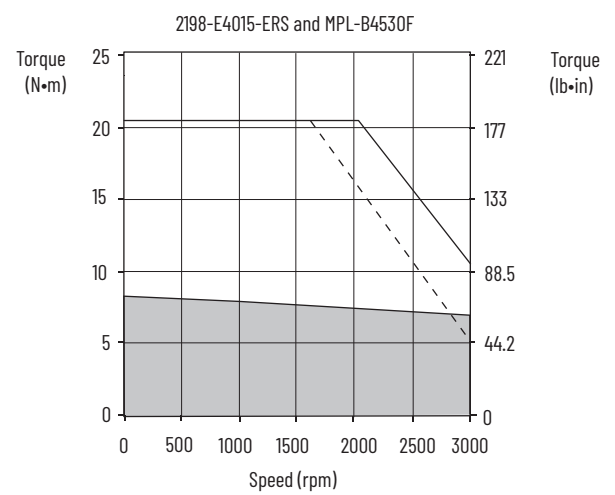
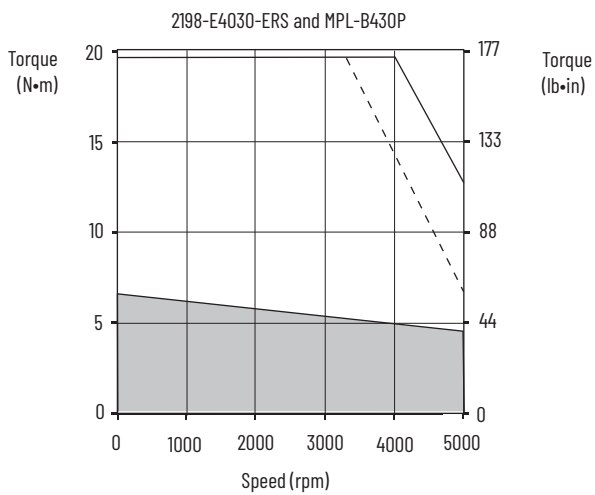
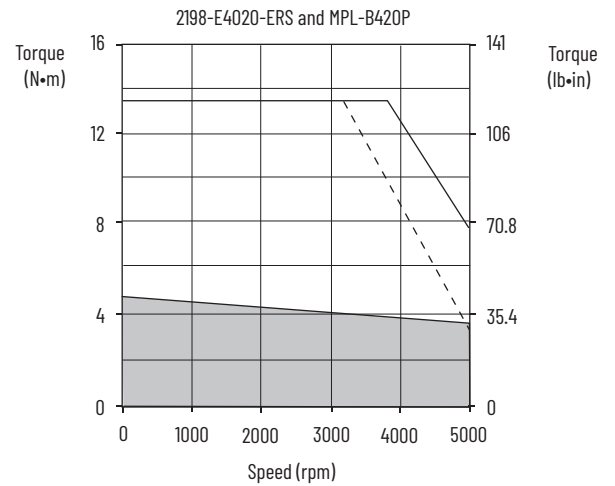
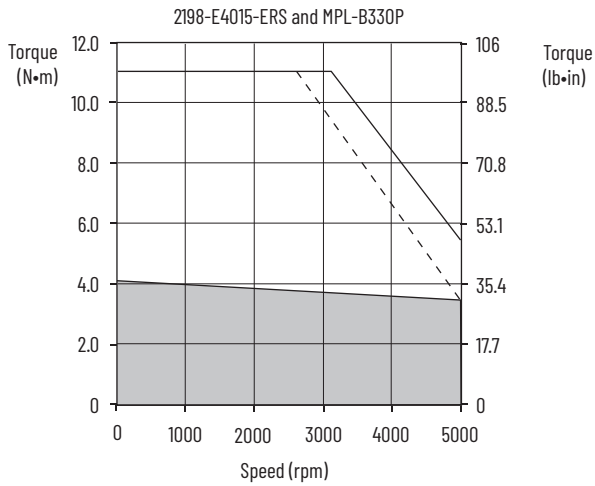
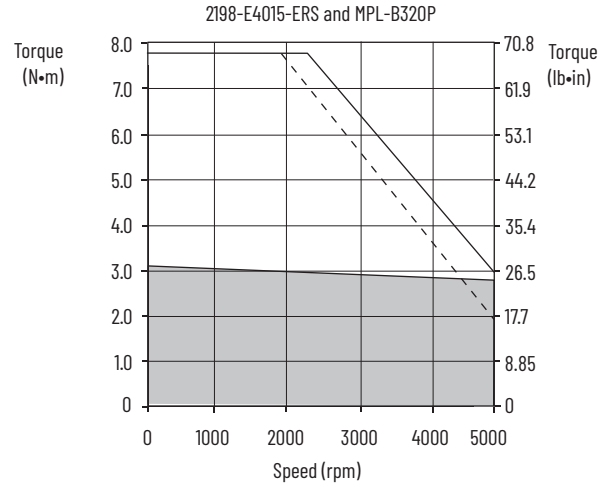
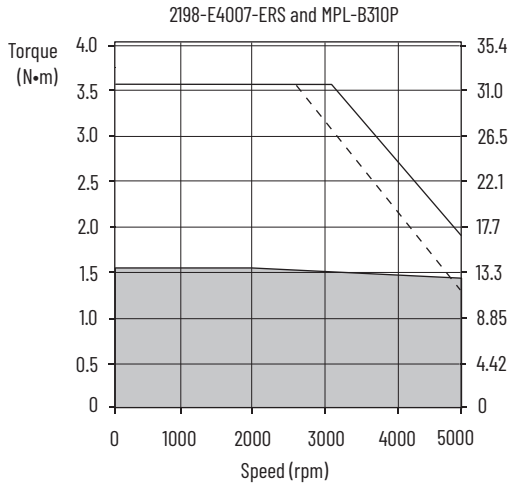


- = Intermittent operating region
- = Continuous operating region
- = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves (continued)






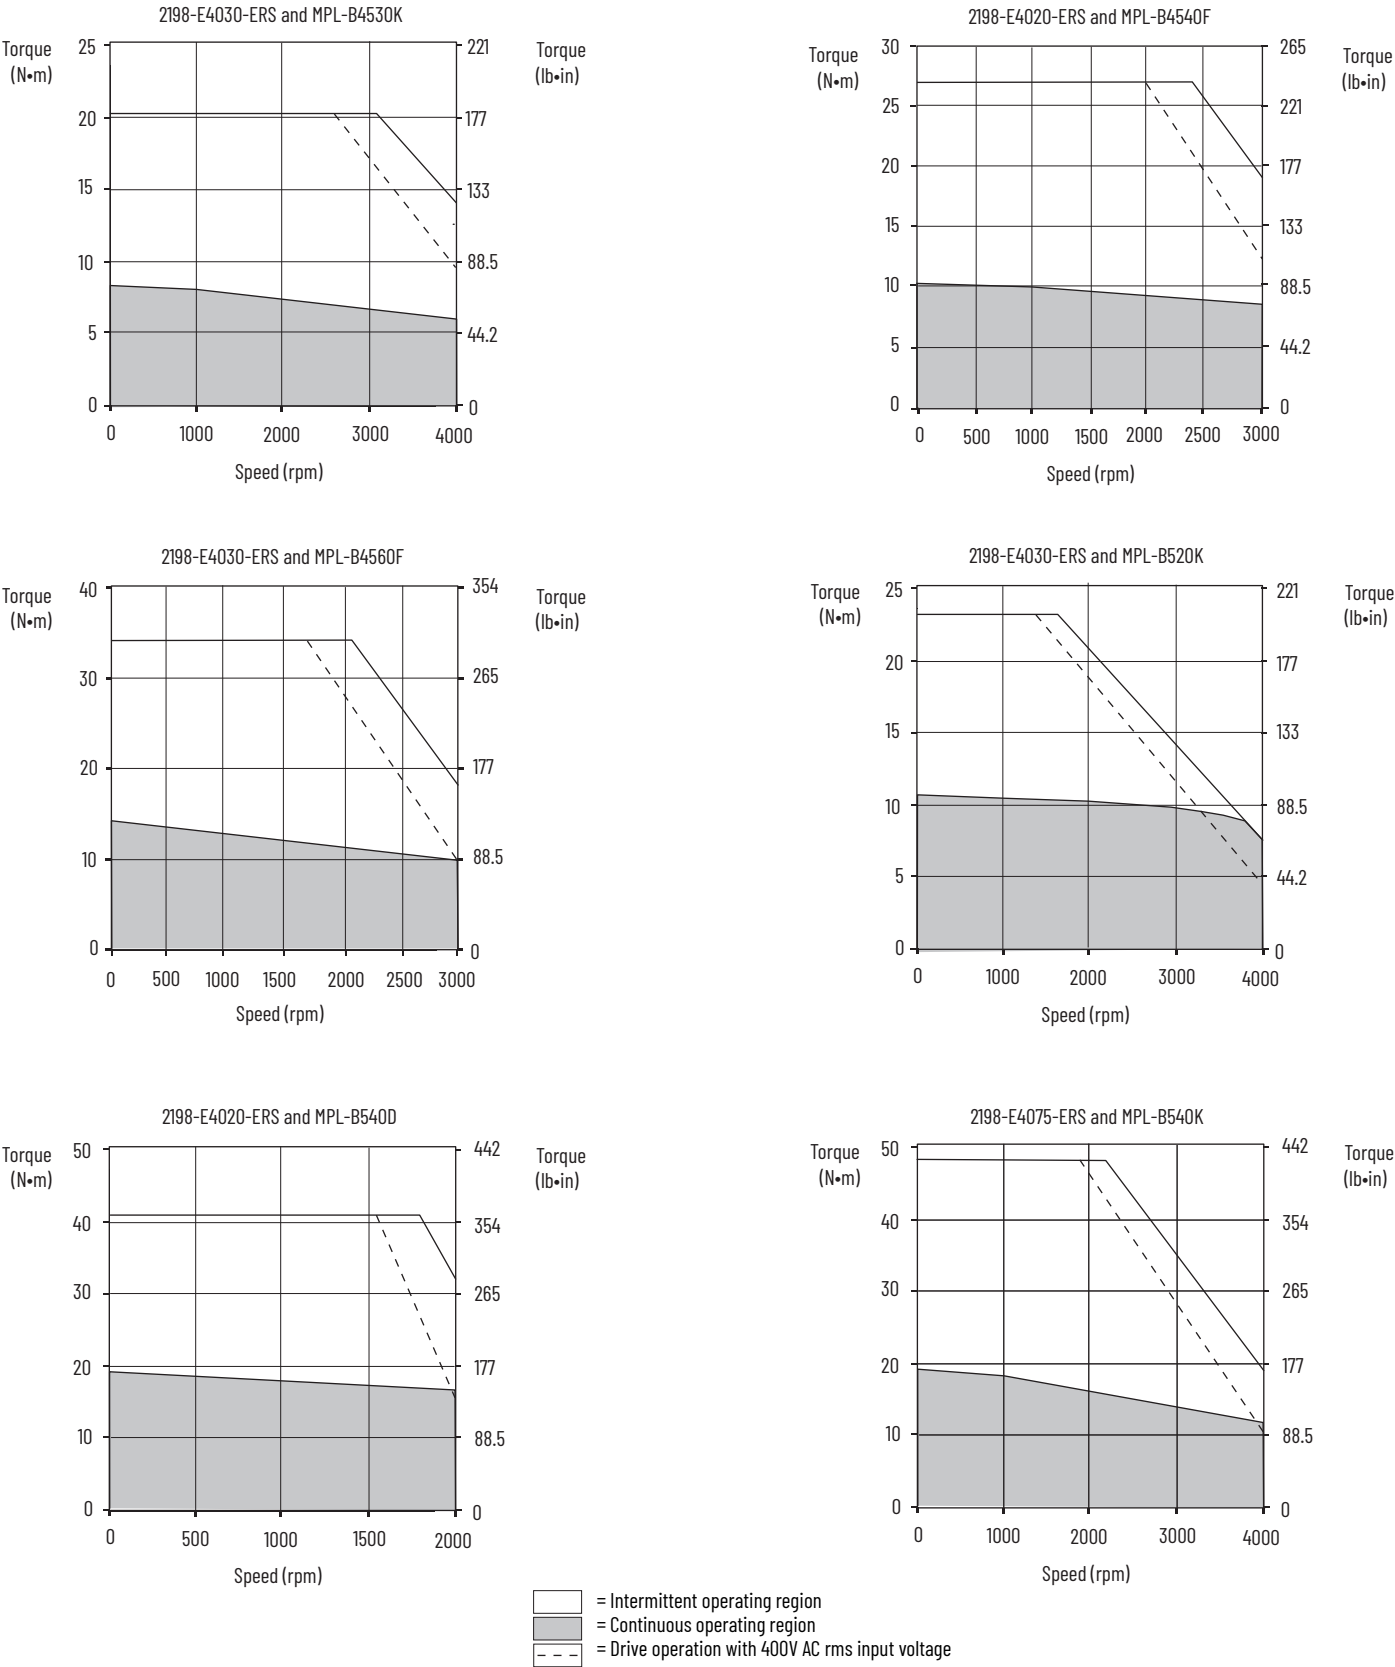


Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

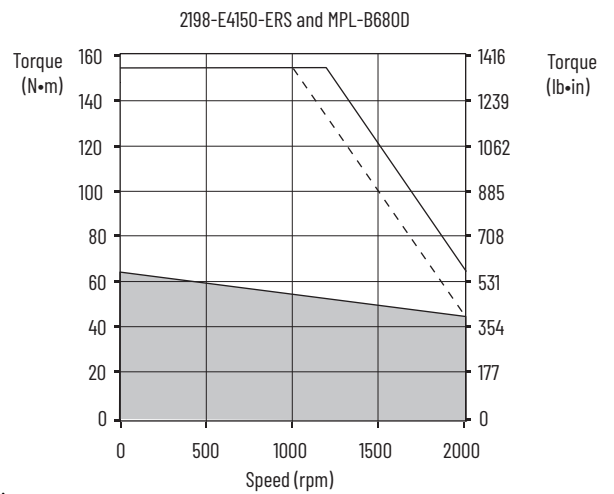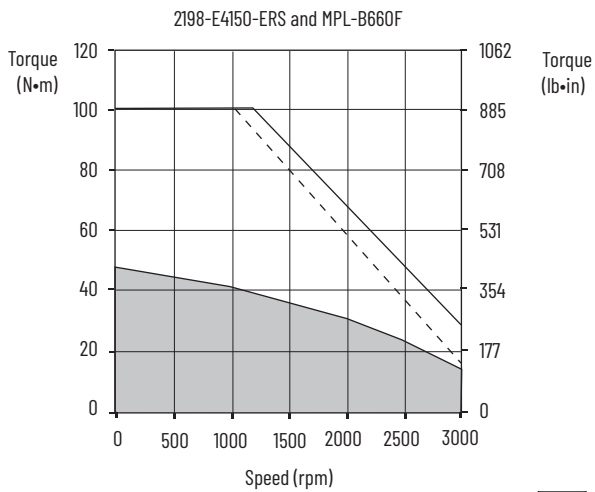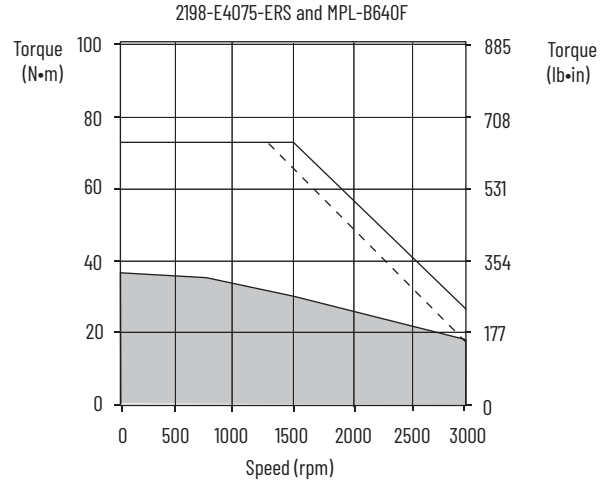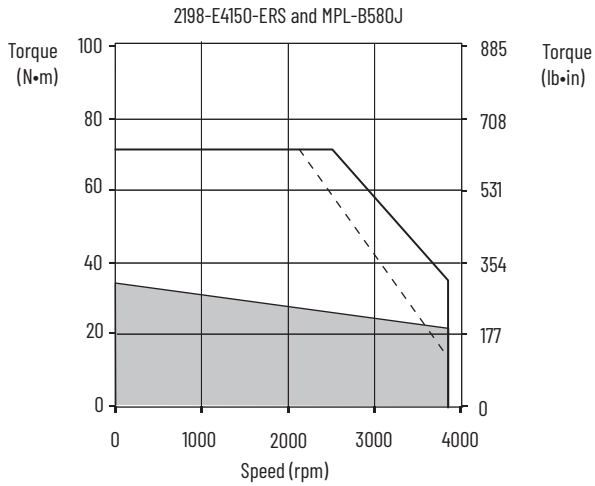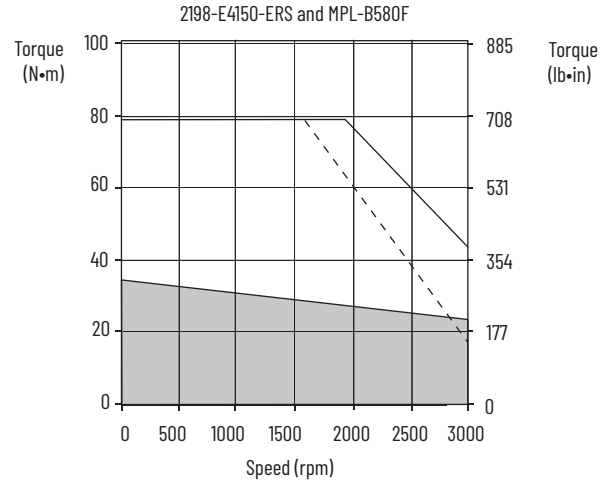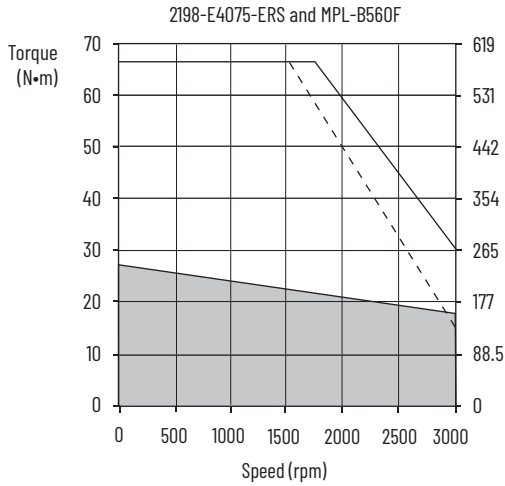




= Intermittent operating region
 = Continuous operating region
 = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

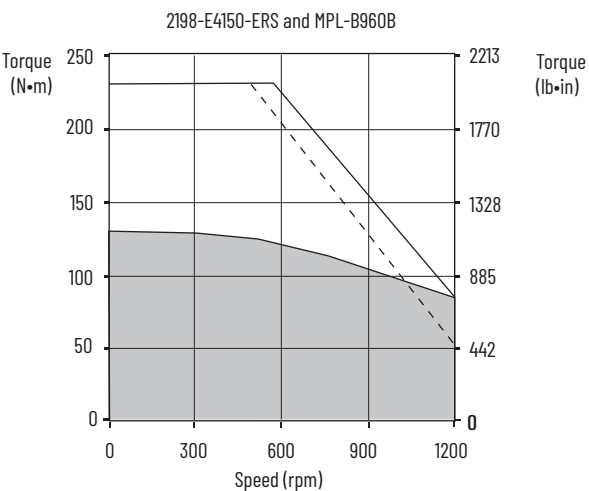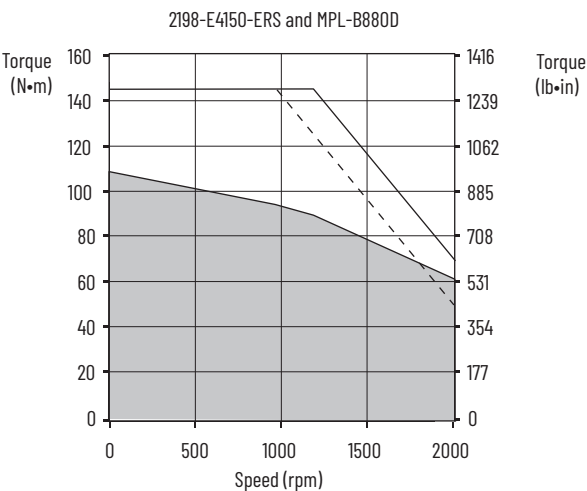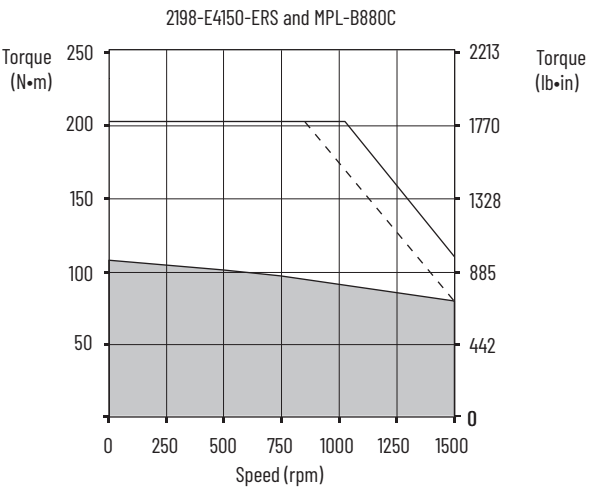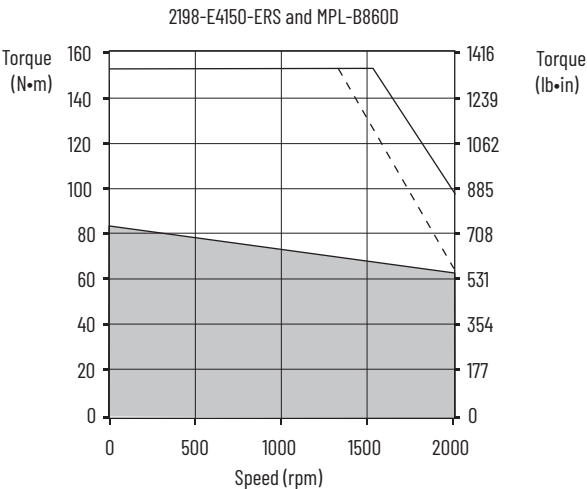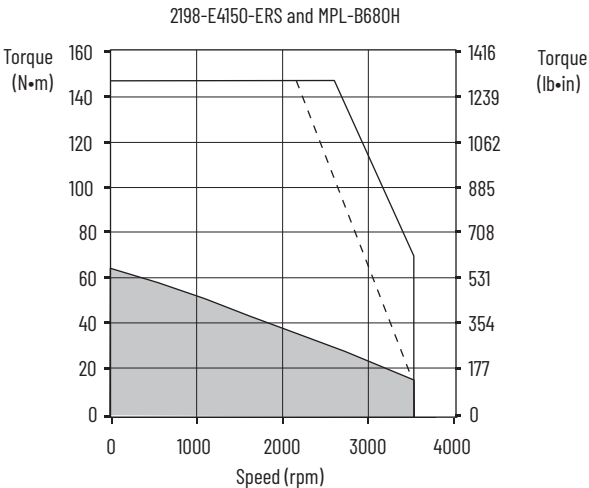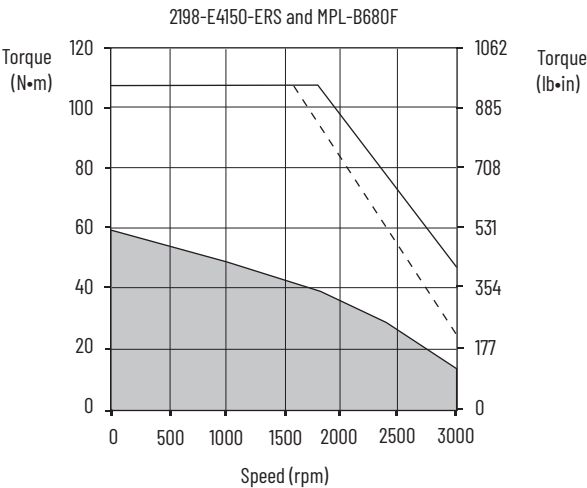

□ = Intermittent operating region
■ = Continuous operating region
--- = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPL Servo Motor Curves (continued)

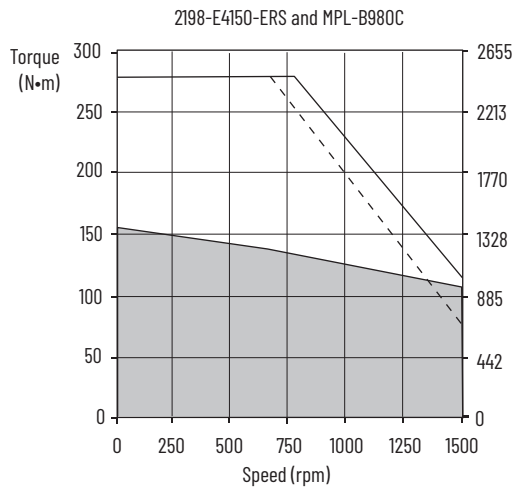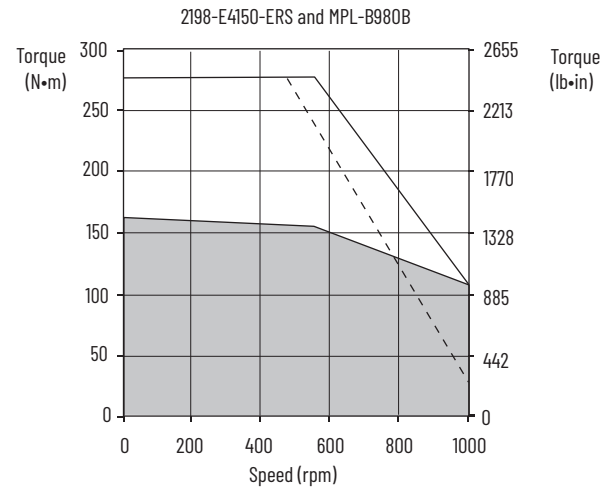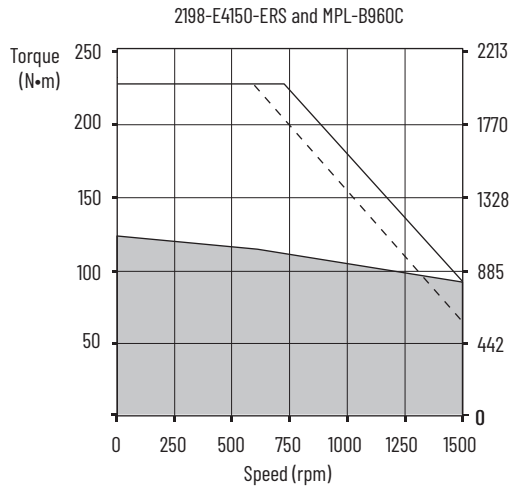

- = Intermittent operating region
- = Continuous operating region
- = Drive operation with 400V AC rms input voltage

Kinetix 5100 (200V-class) Drives with Kinetix MPM Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 230V, nominal input) when matched with Kinetix MPM (200V-class) medium-inertia servo motors with absolute high-resolution encoders. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

These system performance tables and torque/speed curves reflect single-phase and three-phase drive operation with 200V-class motors; however, only 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, and 2198-E1020-ERS drives are capable of single-phase operation.

Kinetix MPM Motor Cable Combinations

Rotary Motor (200V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPM-A1151M, MPM-A1152F, MPM-A1153F	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPM-A1302F	2090-CPxM7DF-14AAxx (standard, non-flex) 2090-CPxM7DF-14AFxx (continuous-flex)	
MPM-A1304F	2090-CPxM7DF-12AAxx (standard, non-flex)	
MPM-A1651F	2090-CPxM7DF-10AAxx (standard, non-flex) 2090-CPxM7DF-10AFxx (continuous-flex)	
MPM-A1652F, MPM-A1653F	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AFxx (continuous-flex)	
MPM-A2152F, MPM-A2153F, MPM-A2154C, MPM-A2154E	2090-CPBM7DF-06AAxx (standard, non-flex)	

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).







For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPM Motor Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Base Speed rpm	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
MPM-A1151M	4500	5000	6000	7.65	2.18 (19.3)	30.5	6.6 (58.4)	0.90	2198-E1015-ERS
MPM-A1152F	3000	4000	5000	11.93	4.7 (41.6)	44.8	13.5 (119)	1.40	2198-E1020-ERS
MPM-A1153F	3000	4000	5000	16.18	6.5 (57.5)	57.4	17.61 (156)	1.45	2198-E1020-ERS
						64.5	19.8 (175)		2198-E2030-ERS
MPM-A1302F	3000	4000	4500	17.28	5.99 (53.0)	50.28	13.5 (119)	1.65	2198-E1020-ERS
MPM-A1304F	3000	3500	4000	19.65	9.3 (82.0)	48.39	19.3 (171)	2.20	2198-E2030-ERS
MPM-A1651F	3000	3000	5000	30.96	10.7 (94.7)	73.8	20.5 (181)	2.50	2198-E2055-ERS
MPM-A1652F	3000	3500	4000	33.54	13.5 (119)	103.2	36.0 (319)	4.03	2198-E2055-ERS
MPM-A1653F	3000	3000	4000	42.4	18.6 (165)	119.1	42.0 (372)	5.10	2198-E2055-ERS
MPM-A2152F	3000	2000	4000	58.4	27.0 (239)	125.8	56.0 (495)	5.20	2198-E2055-ERS
MPM-A2153F	3000	2000	3600	59.65	34.0 (301)	120.4	58.0 (513)	5.80	2198-E2075-ERS
MPM-A2154C	1500	1750	2000	58.68	55.0 (487)	127.3	106 (938)	6.50	2198-E2075-ERS
MPM-A2154E	2250	2000	3000	59.67	44.0 (389)	128.2	84.0 (743)	7.00	2198-E2075-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

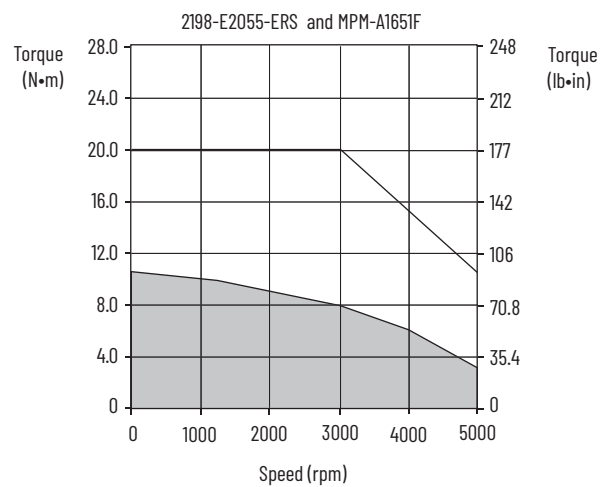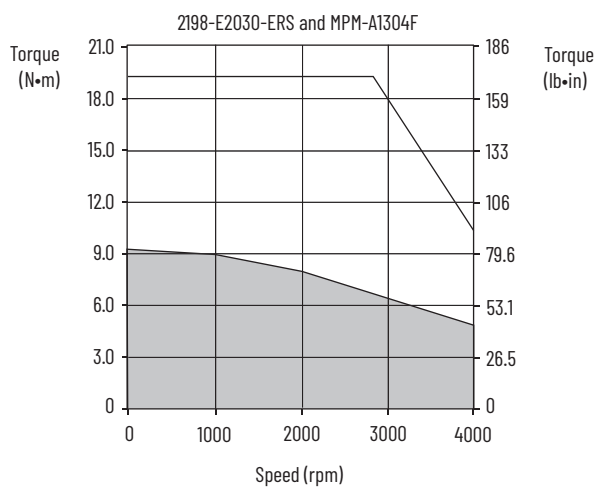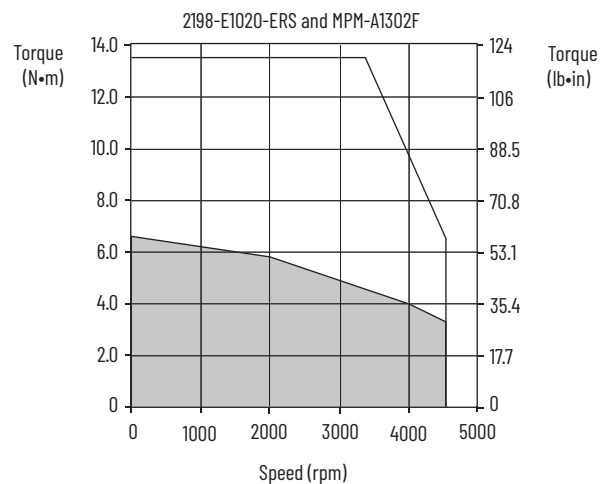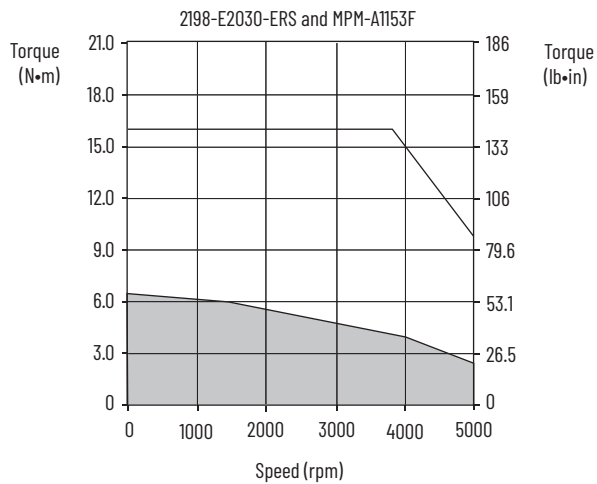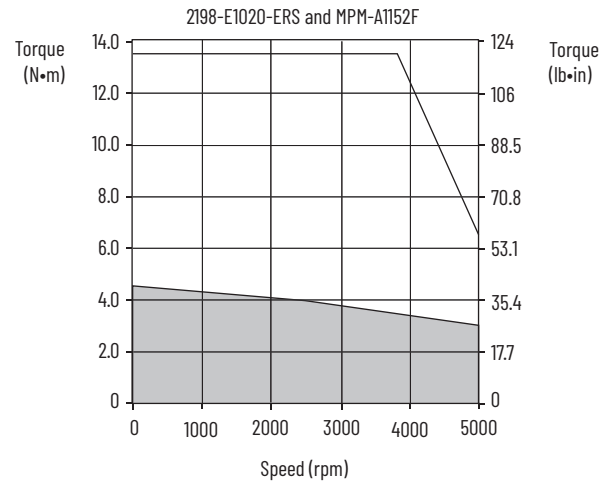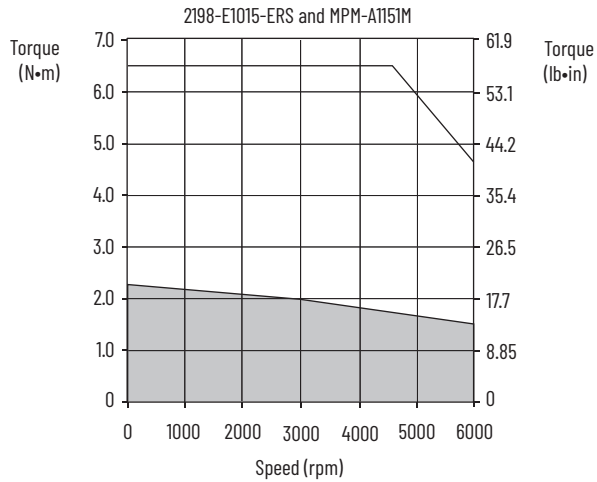

Kinetix 5100 (200V-class) Drives/Kinetix MPM Servo Motor Curves



= Intermittent operating region
 = Continuous operating region

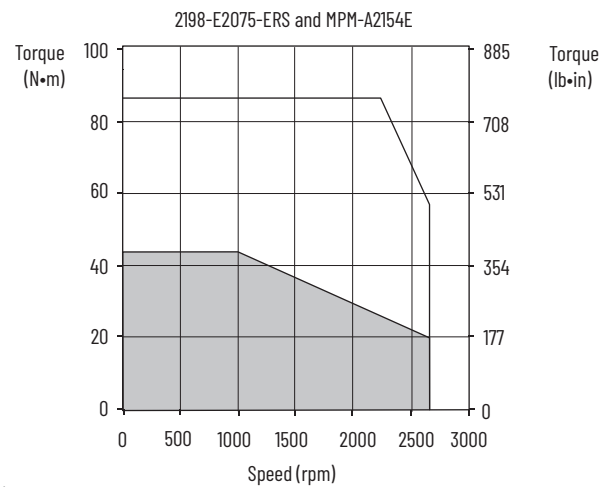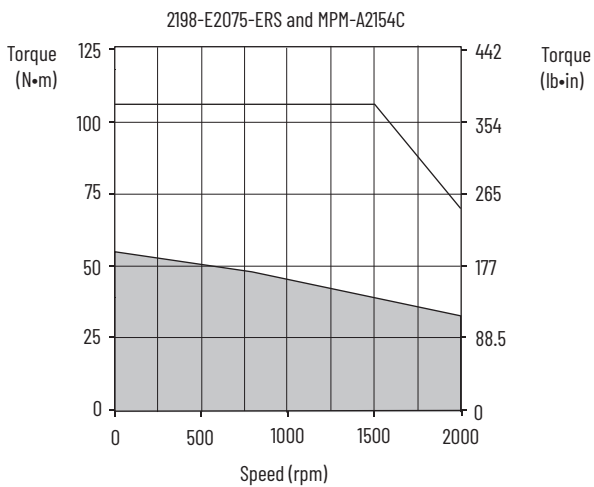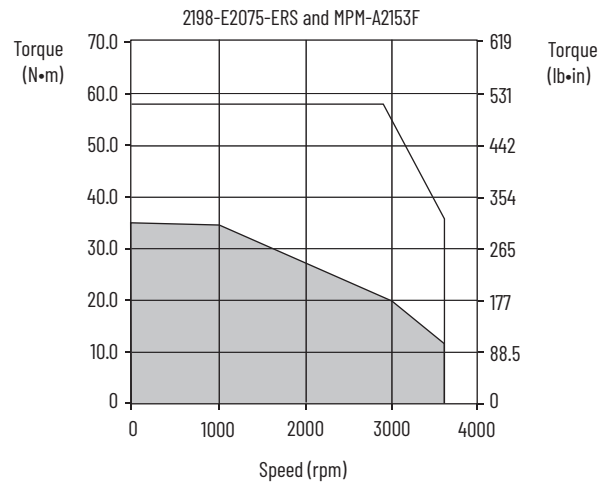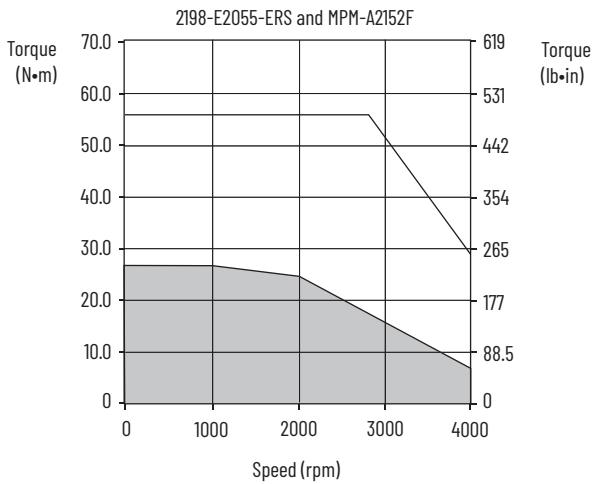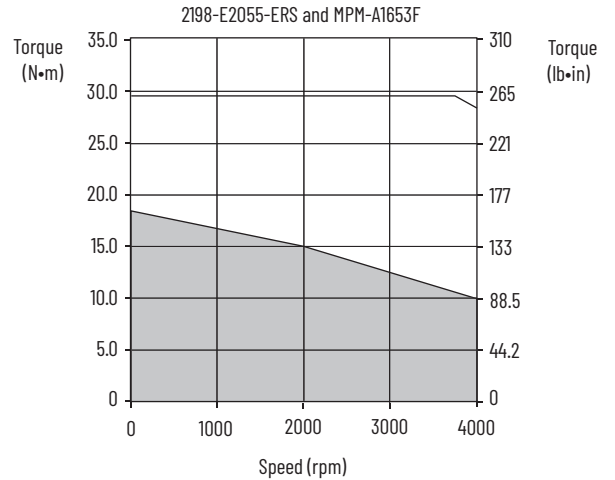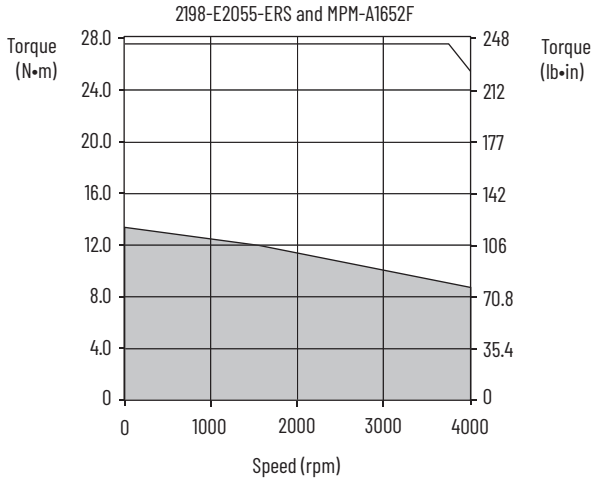Kinetix 5100 (200V-class) Drives/Kinetix MPM Servo Motor Curves (continued)



 = Intermittent operating region
 = Continuous operating region

Kinetix 5100 (400V-class) Drives with Kinetix MPM Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 400 and 480V, nominal input) when matched with Kinetix MPM (400V-class) medium-inertia motors with absolute high-resolution encoders. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

Kinetix MPM Motor Cable Combinations

Rotary Motor (400V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPM-B1151x, MPM-B1152x, MPM-B1153E, MPM-B1153F	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or ⁽²⁾ 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPM-B1302F, MPM-B1302M, MPM-B1304C, MPM-B1304E		
MPM-B1651C, MPM-B1652C		
MPM-B1153T	2090-CPxM7DF-14AAxx (standard, non-flex) 2090-CPxM7DF-14AFxx (continuous-flex)	
MPM-B1302T, MPM-B1304M		
MPM-B1651F, MPM-B1653C		
MPM-B1651M, MPM-B1652E, MPM-B1652F, MPM-B1653E	2090-CPxM7DF-10AAxx (standard, non-flex) 2090-CPxM7DF-10AFxx (continuous-flex)	
MPM-B2152C, MPM-B2153B		
MPM-B1653F	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AFxx (continuous-flex)	
MPM-B2152F, MPM-B2152M, MPM-B2153E, MPM-B2153F		
MPM-B2154B, MPM-B2154E, MPM-B2154F		

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).

(2) Applies to Kinetix 5100 drives and MPM-B1xxxx-M/S through MPM-B2xxxx-M/S motors with absolute high-resolution feedback.

For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPM Motor Performance with Kinetix 5100 (400V-class) Drives







Rotary Motor Cat. No.	Base Speed rpm	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (480V AC input)
MPM-B1151F	3000	4000	5000	2.71	2.3 (20.3)	9.91	6.6 (58.0)	0.75	2198-E4007-ERS
MPM-B1151T	6000	5000	7000	5.62	2.3 (20.3)	20.53	5.9 (52.2)	0.90	2198-E4015-ERS
MPM-B1152C	1500	2500	3000	3.61	5.0 (44.2)	11.30	12.3 (109)	1.20	2198-E4007-ERS
						12.42	13.5 (119)		2198-E4015-ERS
MPM-B1152F	3000	4000	5200	6.17	5.0 (44.2)	21.19	13.5 (119)	1.40	2198-E4015-ERS
MPM-B1152T	6000	4000	7000	11.02	5.0 (44.2)	36.90	13.1 (116)	1.40	2198-E4030-ERS
						37.90	13.5 (119)		2198-E4055-ERS
MPM-B1153E	2250	3000	3500	6.21	6.5 (57.5)	21.61	19.8 (175)	1.40	2198-E4015-ERS
MPM-B1153F	3000	4000	5500	9.20	6.5 (57.5)	29.40	18.19 (161)	1.40	2198-E4020-ERS
						32.0	19.8 (175)		2198-E4030-ERS
MPM-B1153T	6000	4000	7000	15.95	6.5 (57.5)	36.90	11.0 (97.1)	1.45	2198-E4030-ERS
						55.47	16.5 (146)		2198-E4075-ERS
MPM-B1302F	3000	4000	4500	8.57	6.6 (58.4)	21.40	13.1 (116)	1.65	2198-E4015-ERS
						22.12	13.5 (119)		2198-E4020-ERS
MPM-B1302M	4500	4000	6000	12.57	6.6 (58.4)	32.44	13.5 (119)	1.65	2198-E4030-ERS
MPM-B1302T	6000	4000	7000	16.83	6.7 (59.3)	36.90	11.5 (102)	1.65	2198-E4030-ERS
						43.44	13.5 (119)		2198-E4055-ERS
MPM-B1304C	1500	1870	2750	7.00	10.3 (91.1)	21.40	26.0 (230)	2.00	2198-E4015-ERS
						22.30	27.1 (240)		2198-E4020-ERS
MPM-B1304E	2250	3500	4000	10.49	9.9 (87.6)	29.40	23.3 (206)	2.20	2198-E4020-ERS
				10.75	10.2 (90.3)	34.25	27.1 (240)		2198-E4030-ERS
MPM-B1304M	4500	3500	6000	19.02	10.4 (92.0)	36.90	16.5 (146)	2.20	2198-E4030-ERS
						60.60	27.1 (240)		2198-E4075-ERS

Kinetix MPM Motor Performance with Kinetix 5100 (400V-class) Drives (continued)

Rotary Motor Cat. No.	Base Speed rpm	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N•m (lb•in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N•m (lb•in)	Motor Rated Output kW	Kinetix 5100 Drives (480V AC input)
MPM-B1651C	1500	3000	3500	10.21	11.4 (101)	29.29	23.2 (205)	2.50	2198-E4020-ERS
MPM-B1651F	3000	3000	5000	17.75	11.4 (101)	36.90	16.8 (149)	2.50	2198-E4030-ERS
						50.93	23.2 (205)		2198-E4055-ERS
MPM-B1651M	4500	3000	5000	22.46	11.4 (101)	36.90	15.0 (133)	2.50	2198-E4055-ERS
						56.89	23.2 (205)		2198-E4075-ERS
MPM-B1652C	1500	2500	2500	11.51	16.0 (142)	33.63	40.0 (354)	3.80	2198-E4030-ERS
MPM-B1652E	2250	3500	3500	20.94	21.1 (187)	53.20	42.2 (374)	4.30	2198-E4055-ERS
						60.53	48.0 (425)		2198-E4075-ERS
MPM-B1652F	3000	3500	4500	28.74	21.1 (187)	75.39	43.02 (381)	4.30	2198-E4075-ERS
						84.12	48.0 (425)		2198-E4150-ERS
MPM-B1653C	1500	2000	2500	20.05	26.7 (236)	36.90	42.2 (374)	4.60	2198-E4030-ERS
						59.26	67.8 (600)		2198-E4075-ERS
MPM-B1653E	2250	3000	3500	27.00	26.8 (237)	53.20	45.2 (400)	5.10	2198-E4055-ERS
						72.97	62.0 (549)		2198-E4075-ERS
MPM-B1653F	3000	3000	4000	34.94	31.0 (274)	53.20	31.6 (280)	5.10	2198-E4055-ERS
						94.36	56.1 (496)		2198-E4150-ERS
MPM-B2152C	1500	2000	2500	27.40	36.7 (325)	53.20	69.3 (613)	5.60	2198-E4055-ERS
						55.49	72.3 (640)		2198-E4075-ERS
MPM-B2152F	3000	2500	4500	43.54	34.1 (302)	98.06	72.2 (639)	5.90	2198-E4150-ERS
MPM-B2152M	4500	2500	5000	44.58	34.1 (302)	76.37	50.0 (442)	5.90	2198-E4150-ERS
MPM-B2153B	1250	1750	2000	24.06	48.0 (425)	53.20	89.6 (793)	6.80	2198-E4055-ERS
						60.0	101.1 (895)		2198-E4075-ERS
MPM-B2153E	2250	2000	3000	39.63	47.9 (424)	75.40	77.4 (685)	7.20	2198-E4075-ERS
						98.43	101 (895)		2198-E4150-ERS
MPM-B2153F	3000	2000	3800	43.86	45.6 (403)	98.4	98.9 (875)	7.20	2198-E4150-ERS
MPM-B2154B	1250	1750	2000	35.46	62.7 (555)	75.40	118 (1048)	6.90	2198-E4075-ERS
						98.02	154 (1363)		2198-E4150-ERS
MPM-B2154E	2250	2000	3000	43.68	55.9 (495)	98.37	112 (991)	7.50	2198-E4150-ERS
MPM-B2154F	3000	2000	3300	44.40	56.2 (497)	83.86	87.9 (778)	7.50	2198-E4150-ERS







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves

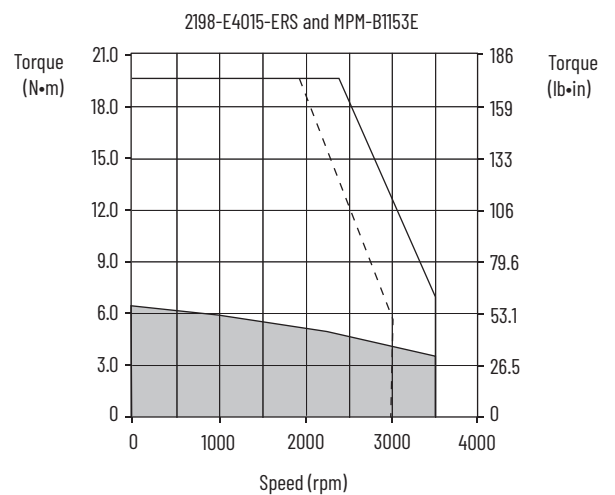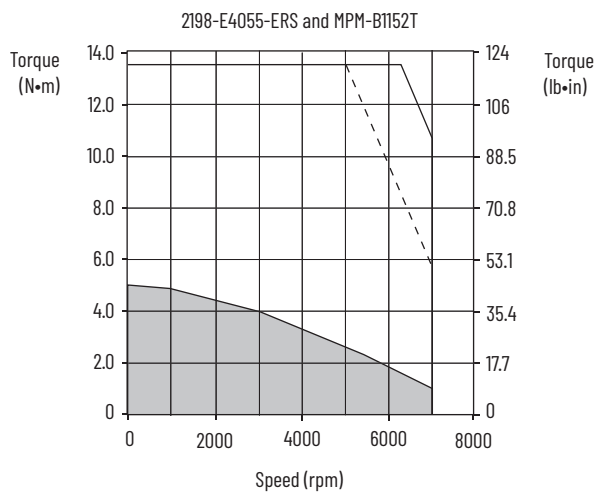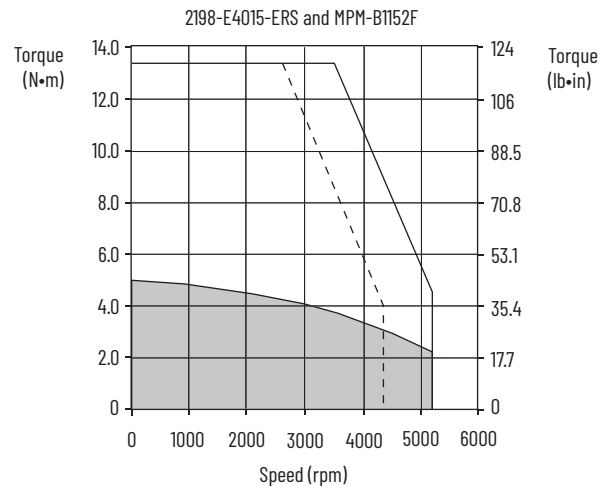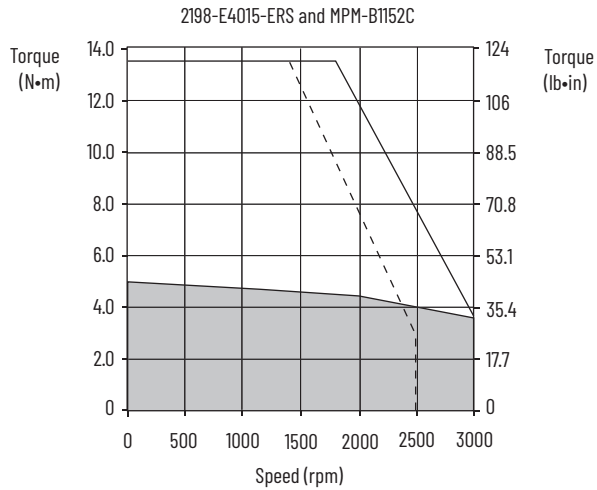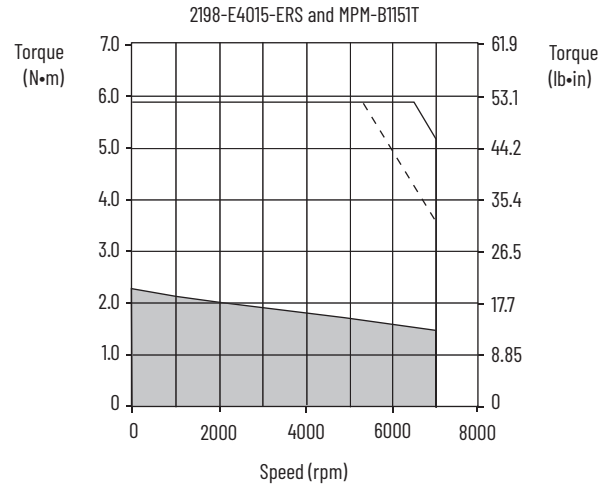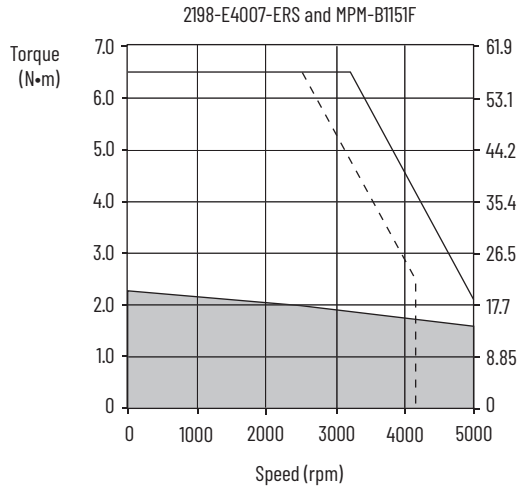







— = Intermittent operating region
 ■ = Continuous operating region
 - - - = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves (continued)

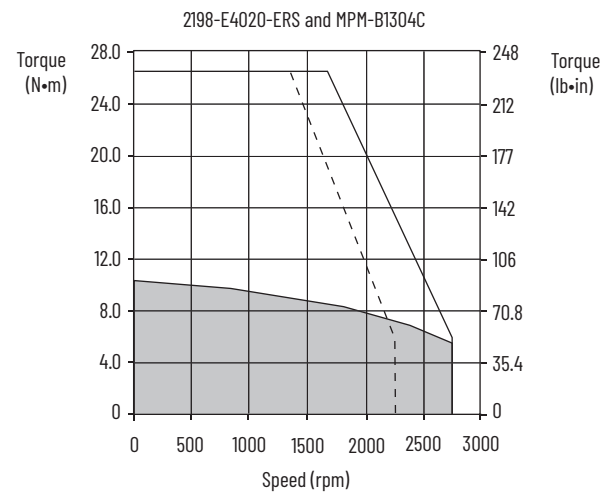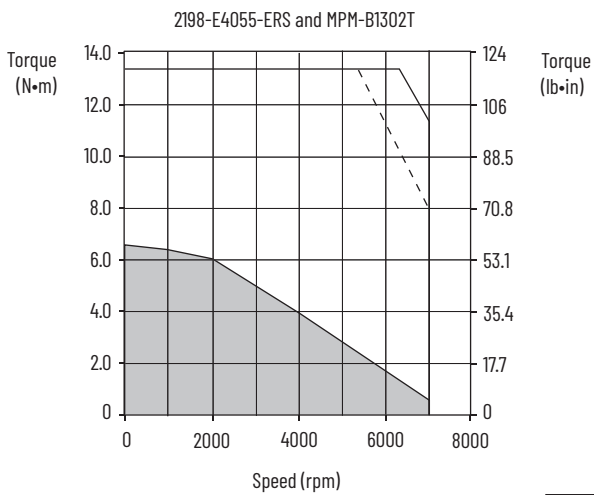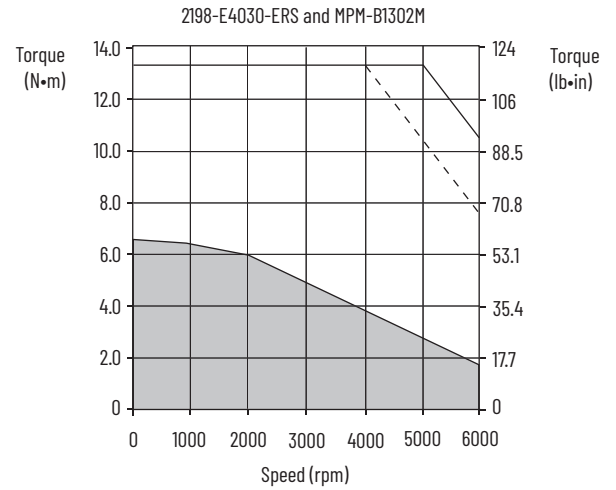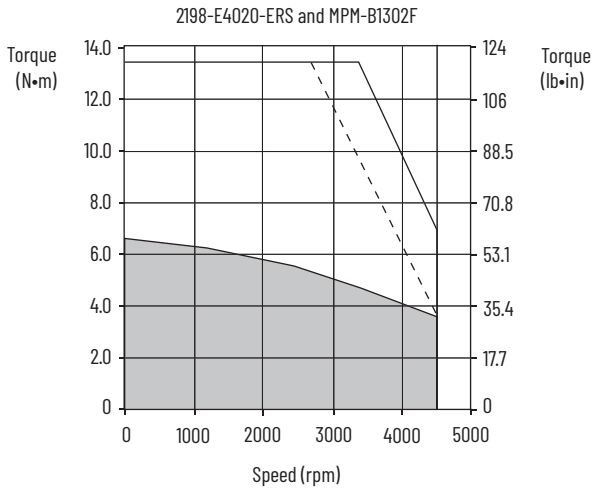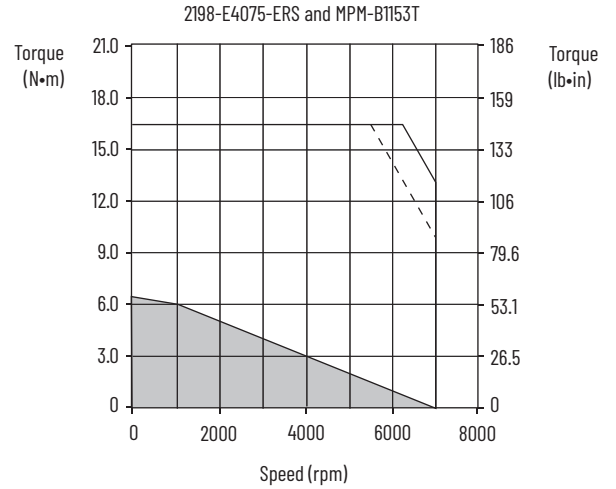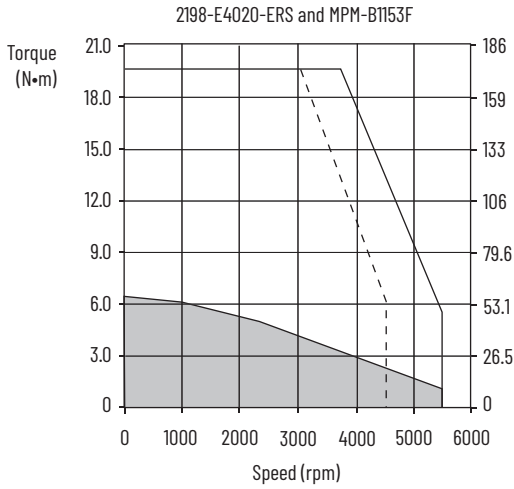







= Intermittent operating region
 = Continuous operating region
 - - - = Drive operation with 400V AC rms input voltage

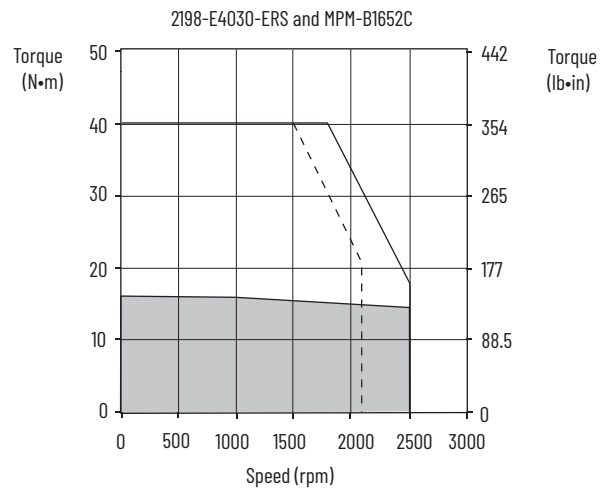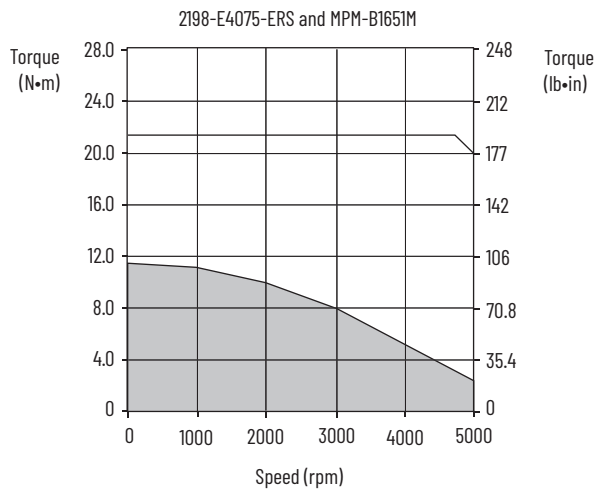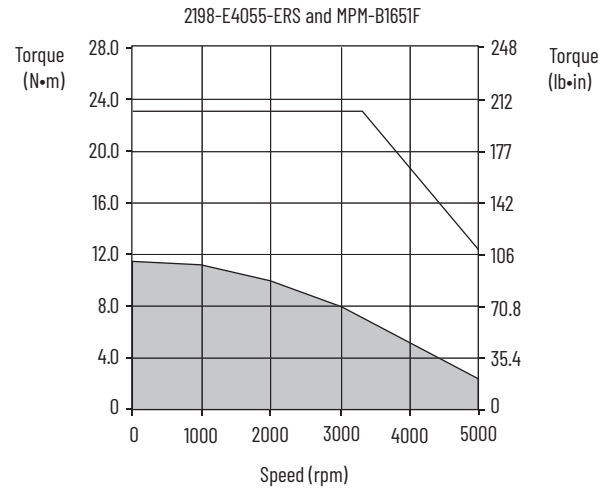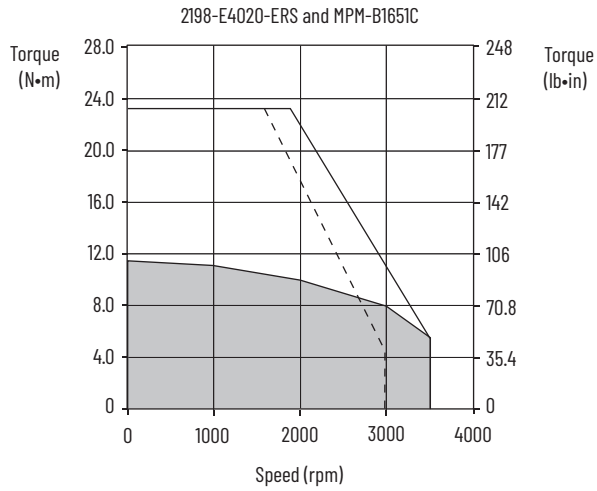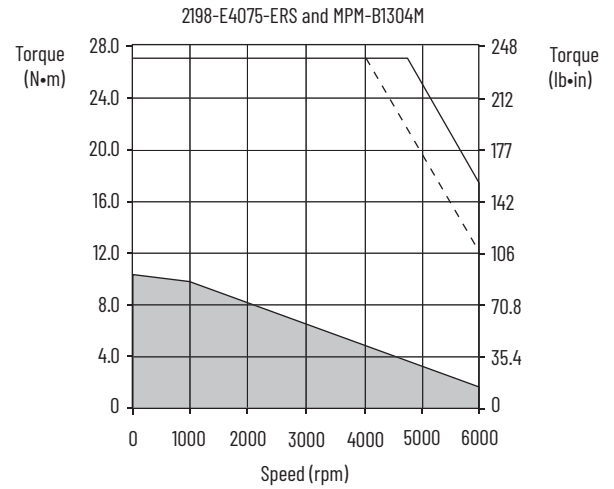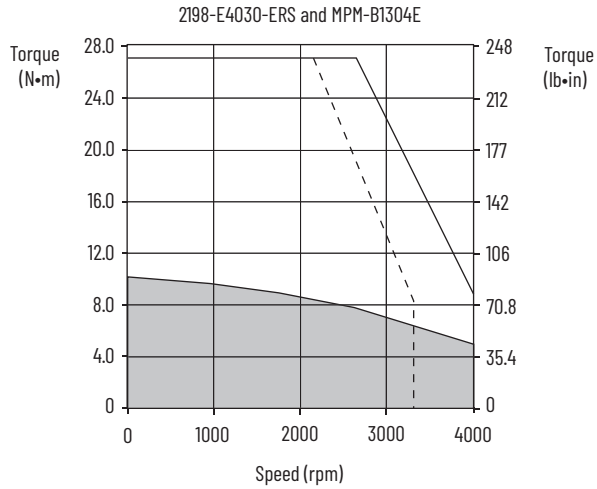


Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves (continued)









= Intermittent operating region
 = Continuous operating region
 = Drive operation with 400V AC rms input voltage

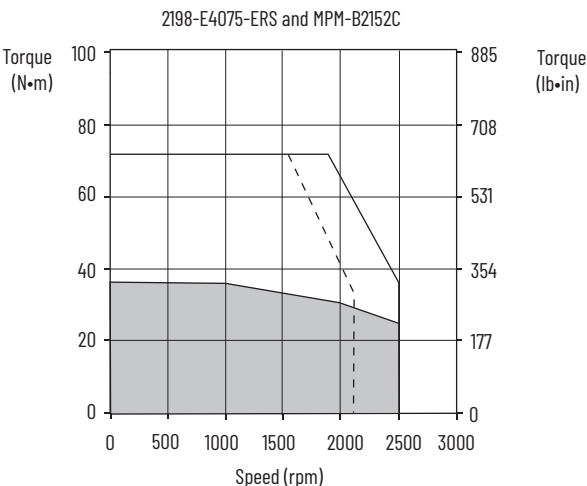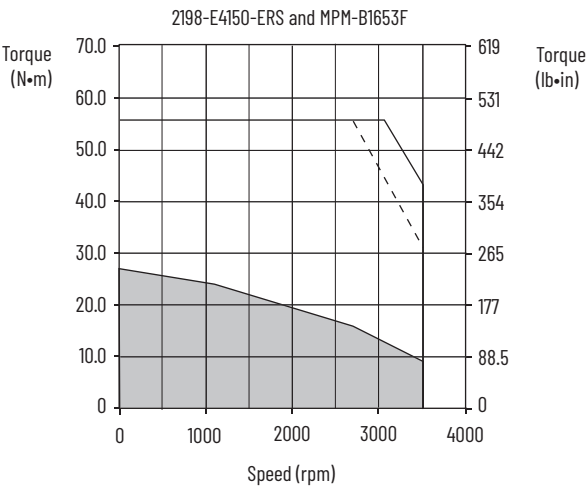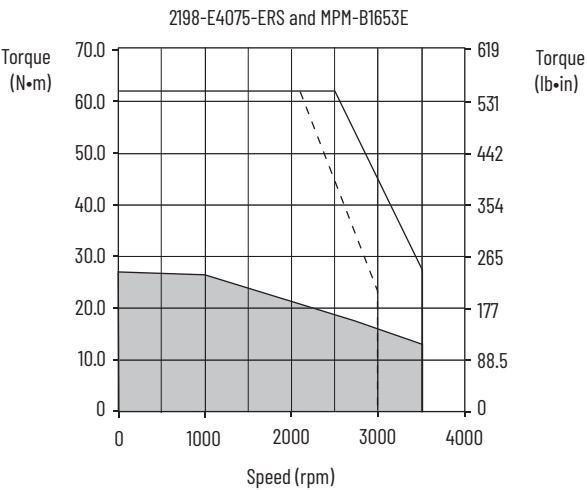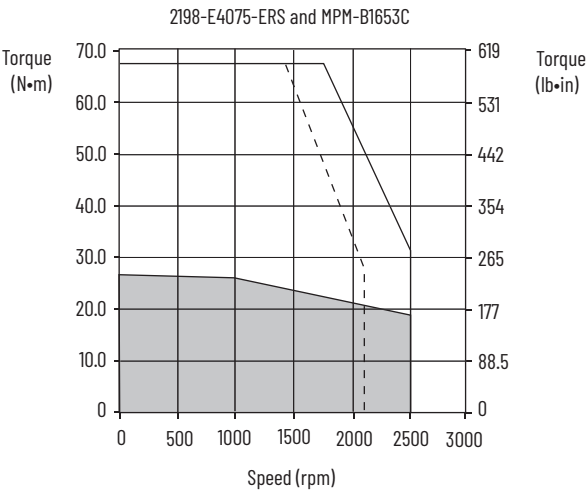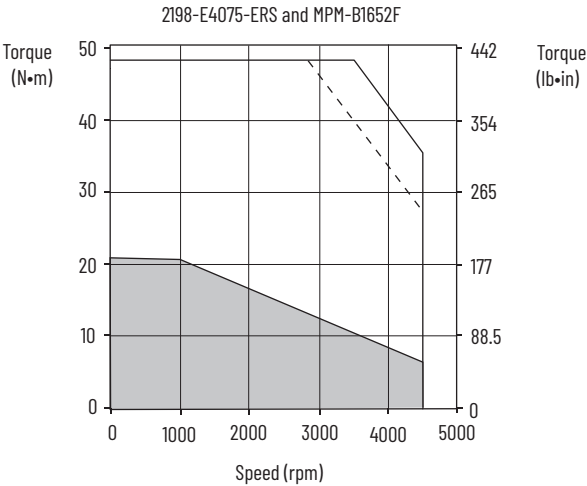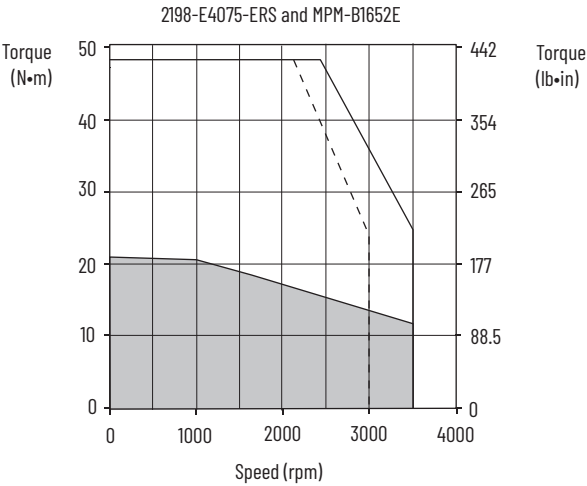Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves (continued)




 = Intermittent operating region
 = Continuous operating region
 = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves (continued)

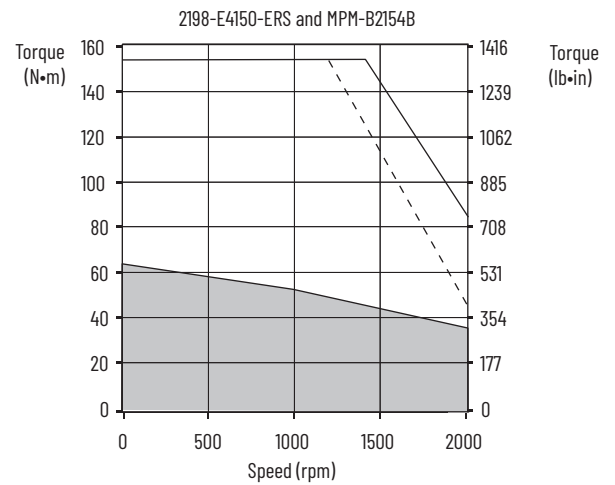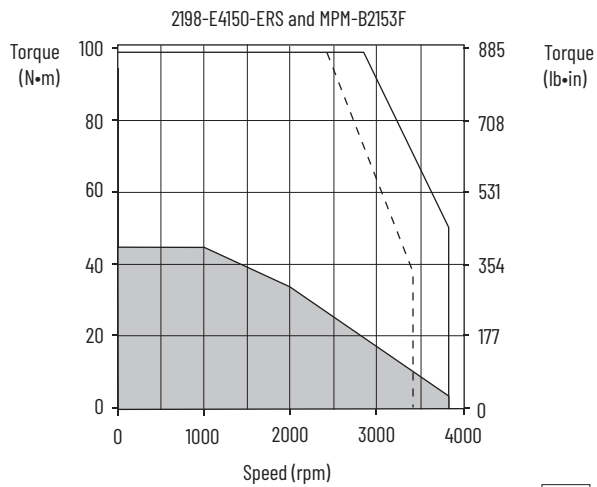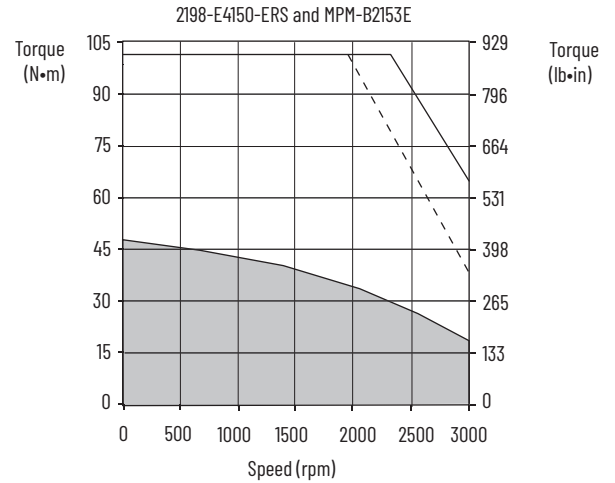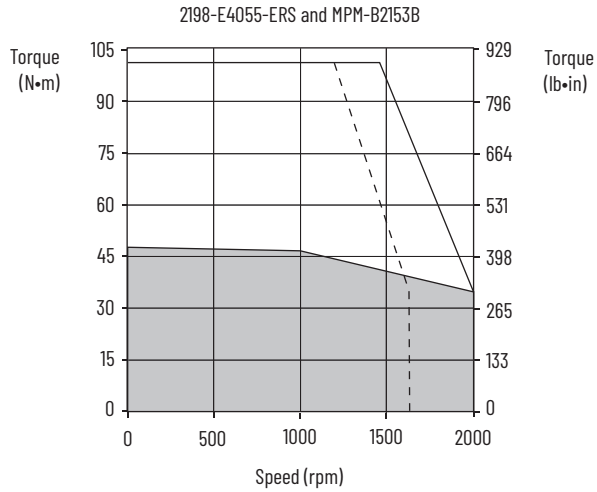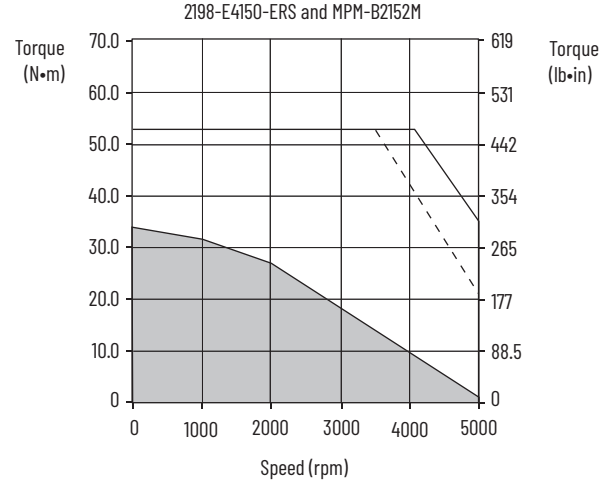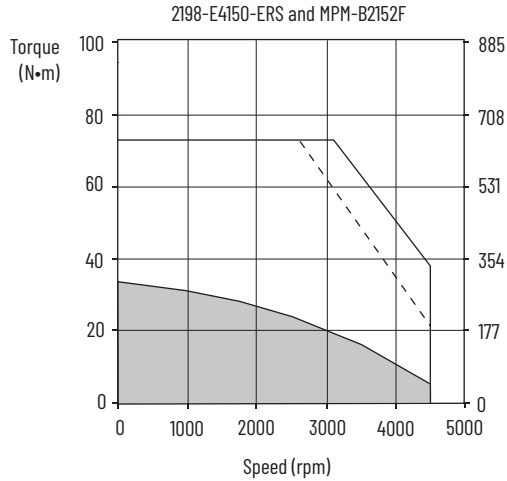

= Intermittent operating region
 = Continuous operating region
 = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPM Servo Motor Curves (continued)

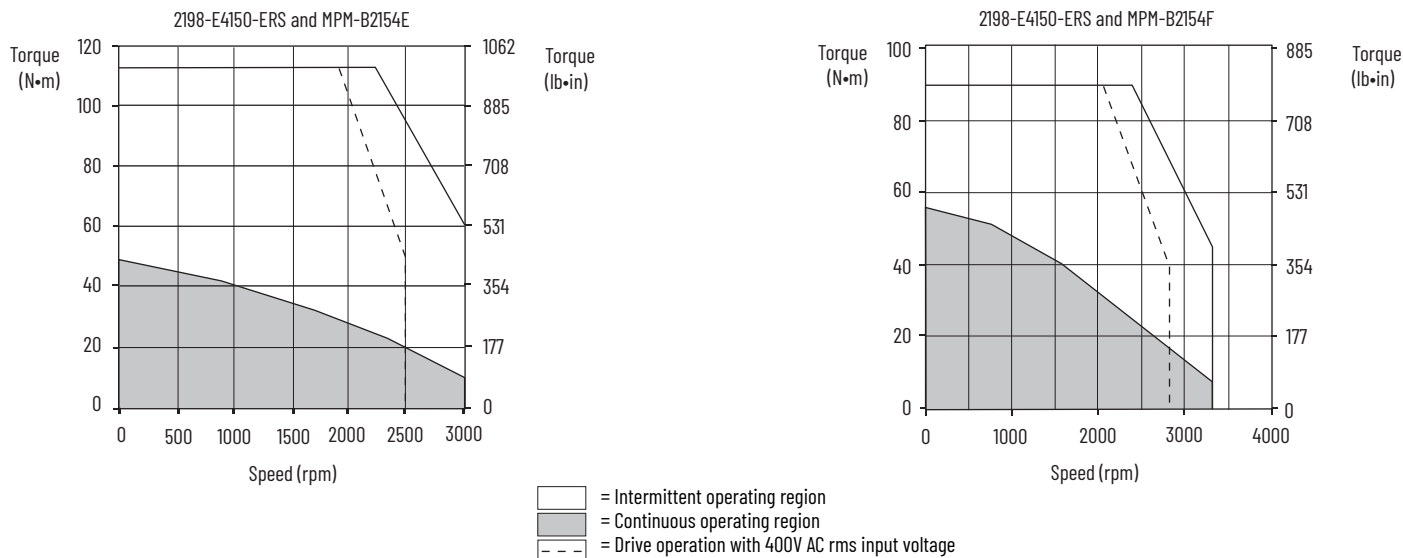

Kinetix 5100 (200V-class) Drives with Kinetix MPF Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 230V, nominal input) when matched with Kinetix MPF (200V-class) servo motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

These system performance tables and torque/speed curves reflect single-phase and three-phase drive operation with 200V-class motors; however, only 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, and 2198-E1020-ERS drives are capable of single-phase operation.

Kinetix MPF Servo Motor and Cable Combinations

Rotary Motor (200V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPF-A310P, MPF-A320H, MPF-A320P, MPF-A330P	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPF-A430H		
MPF-A430P	2090-CPxM7DF-14AAxx (standard, non-flex) 2090-CPxM7DF-14AFxx (continuous-flex)	
MPF-A4540F, MPF-A4530K		
MPF-A540K	2090-CPxM7DF-08AAxx (standard, non-flex) 2090-CPxM7DF-08AFxx (continuous-flex)	

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).


For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPF Motor Performance Specifications with Kinetix 5100 (200V-class) Drives






Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
MPF-A310P	4750	5000	4.85	1.58 (14.0)	14.0	3.61 (31.9)	0.73	2198-E1007-ERS
MPF-A320H	3350	3500	6.10	3.05 (27.0)	19.3	7.91 (70.0)	1.0	2198-E1007-ERS
MPF-A320P	4750	5000	9.00	3.05 (27.0)	29.5	7.91 (70.0)	1.3	2198-E1015-ERS
MPF-A330P	5000	5000	12.0	4.18 (37.0)	38.0	11.10 (98.2)	1.6	2198-E1020-ERS
MPF-A430H	3500	3500	12.2	6.21 (55.0)	45.0	19.80 (175)	1.8	2198-E1020-ERS
MPF-A430P	5000	5000	16.80	5.99 (53.0)	57.4	16.96 (150)	1.9	2198-E1020-ERS
					67.0	19.80 (175)		2198-E2030-ERS
MPF-A4530K	4000	4000	19.50	8.13 (71.9)	62.0	20.30 (179)	2.3	2198-E2030-ERS
MPF-A4540F	3000	3000	18.40	10.20 (90.3)	57.4	27.10 (239)	2.5	2198-E1020-ERS
MPF-A540K	4000	4000	41.50	19.40 (172)	120.0	48.60 (430)	4.1	2198-E2055-ERS



Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

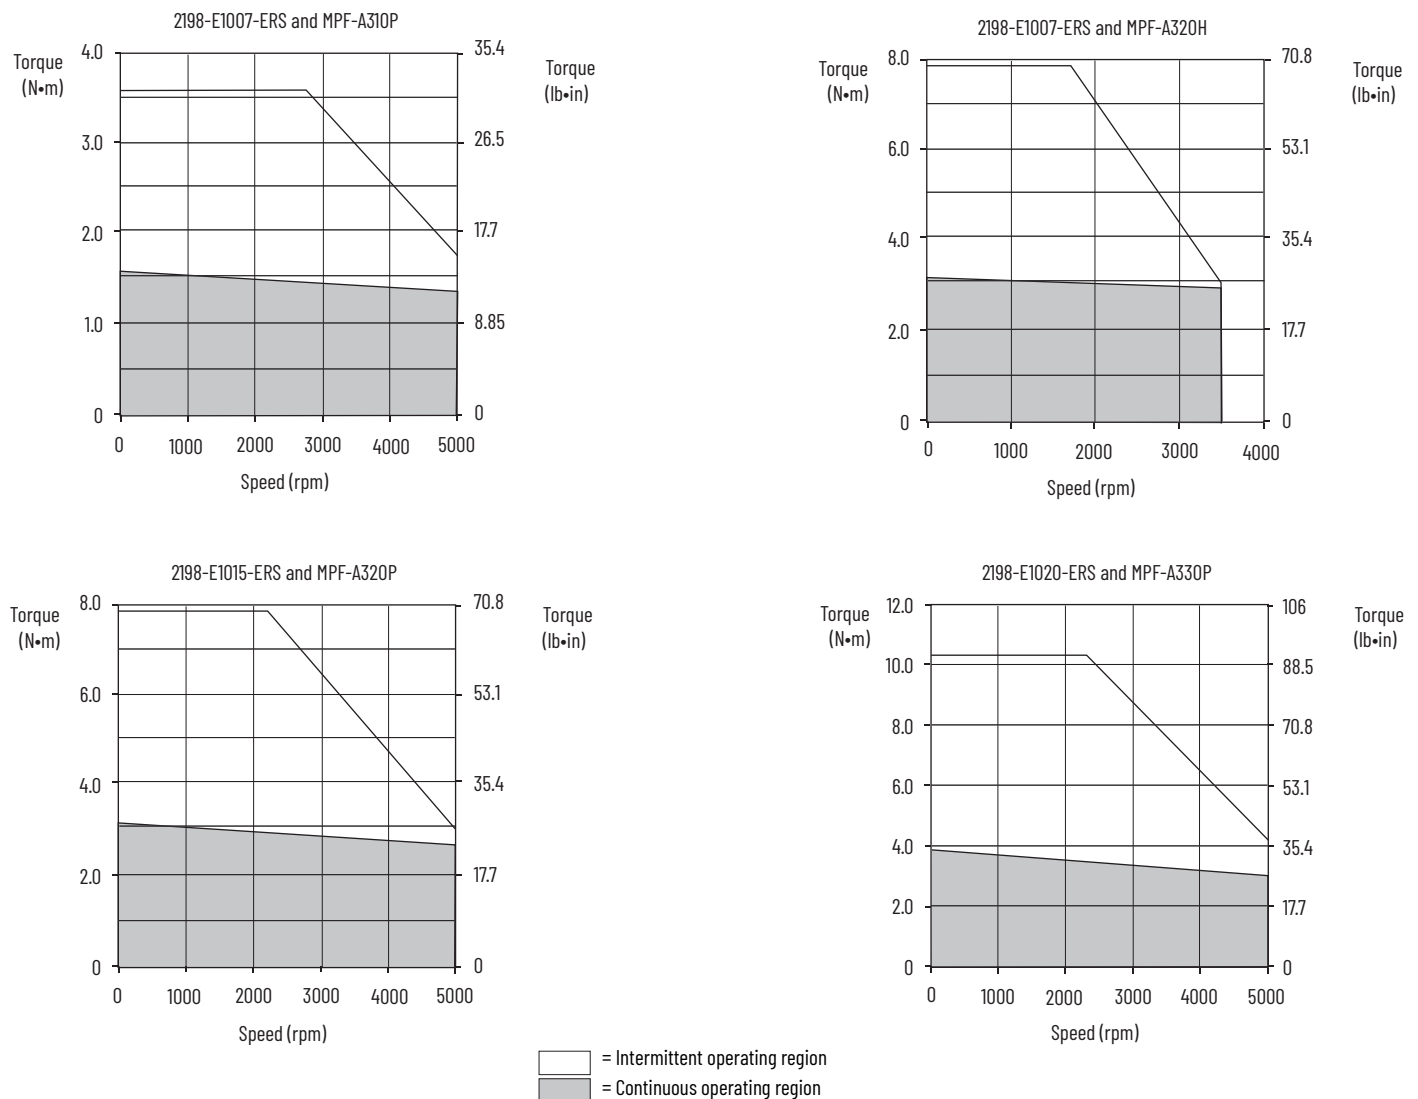Kinetix 5100 (200V-class) Drives/Kinetix MPF Servo Motor Curves

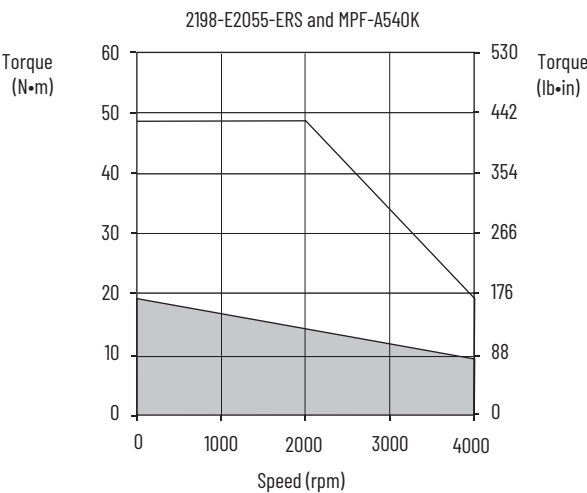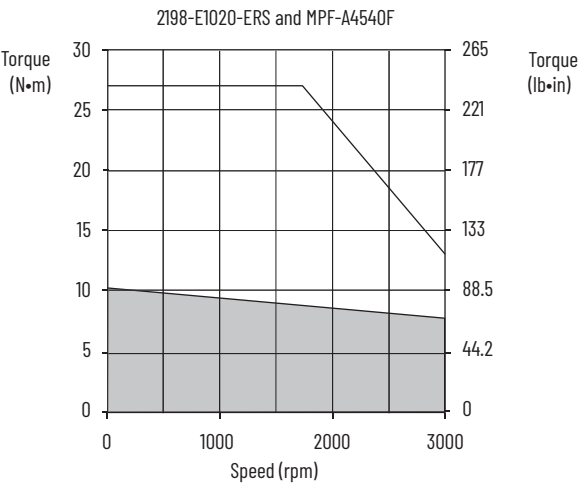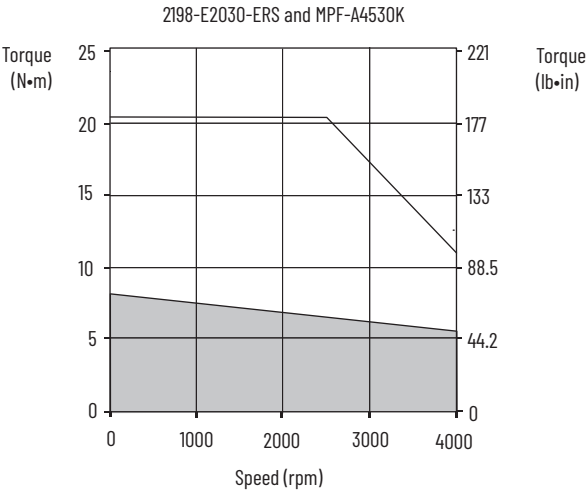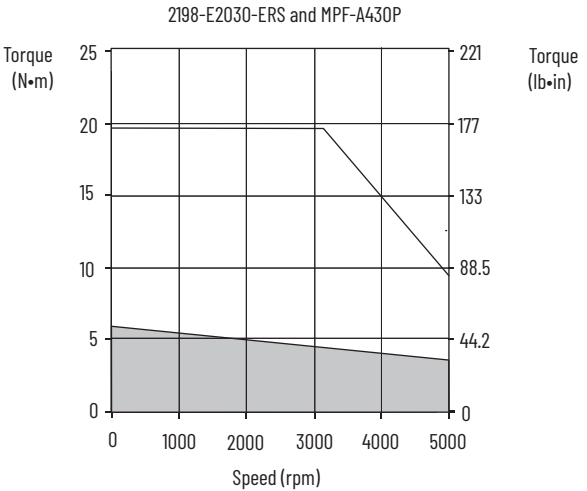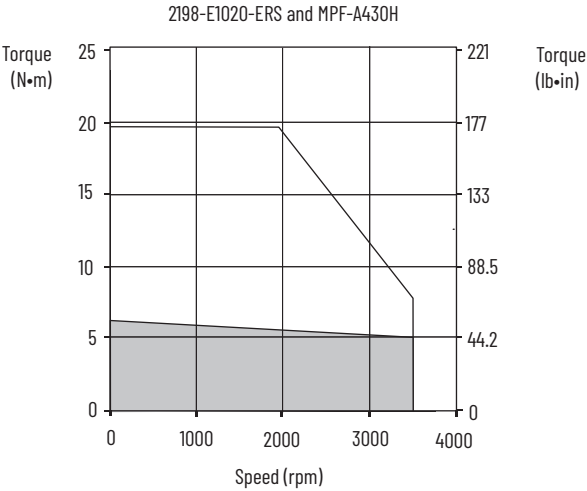

Kinetix 5100 (200V-class) Drives/Kinetix MPF Servo Motor Curves (continued)



 = Intermittent operating region
 = Continuous operating region

Kinetix 5100 (400V-class) Drives with Kinetix MPF Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 400 and 480V, nominal input) when matched with Kinetix MPF (400V-class) food-grade motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

Kinetix MPF Motor Cable Combinations

Rotary Motor (400V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPF-B310P, MPF-B320P, MPF-B330P	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or 2090-CFBM7DD-CEAAxx (standard, non-flex) 2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPF-B430P		
MPF-B4530K, MPF-B4540F	2090-CPxM7DF-10AAxx (standard, non-flex) 2090-CPxM7DF-10AFxx (continuous-flex)	2090-CFBM7DF-CEAFxx (continuous-flex) Absolute High-resolution Feedback
MPF-B540K		

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).







For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPF Motor Performance Specifications with Kinetix 5100 (400V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (480V AC input)
MPF-B310P	5000	5000	2.40	1.60 (14.2)	7.10	3.6 (31.9)	0.77	2198-E4007-ERS
MPF-B320P	5000	5000	4.50	3.10 (27.4)	11.3	6.3 (55.7)	1.5	2198-E4007-ERS
MPF-B330P	5000	5000	6.10	4.18 (37.0)	14.0	7.8 (69.0)		2198-E4015-ERS
MPF-B430P	5000	5000	9.20	6.55 (58.0)	19.0	11.1 (98.2)	1.6	2198-E4015-ERS
MPF-B4530K	4000	4000	11.0	8.25 (73.0)	29.4	18.2 (161)	2.0	2198-E4020-ERS
					32.0	19.8 (175)		2198-E4030-ERS
MPF-B4540F	3000	3000	9.10	10.20 (90.3)	29.4	19.2 (170)	2.4	2198-E4020-ERS
					31.0	20.3 (179)		2198-E4030-ERS
MPF-B540K	4000	4000	20.5	19.4 (171)	29.0	27.1 (240)	2.5	2198-E4020-ERS
					53.2	43.1 (381)		2198-E4055-ERS
					60.0	48.6 (430)	4.1	2198-E4075-ERS


Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (400V-class) Drives/Kinetix MPF Servo Motor Curves

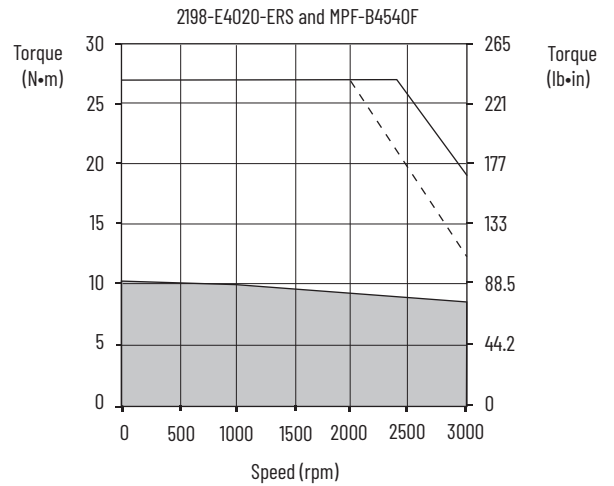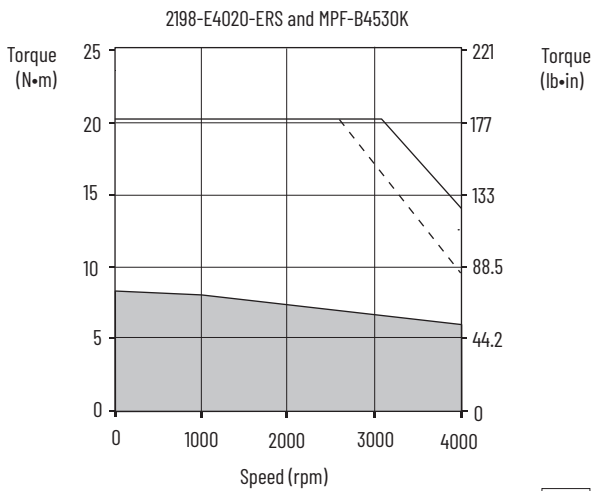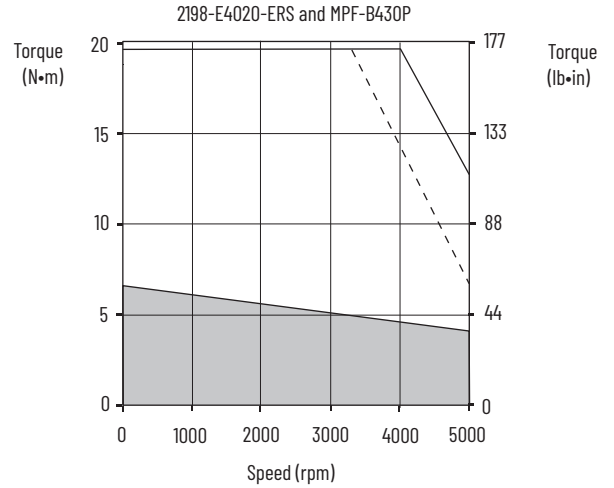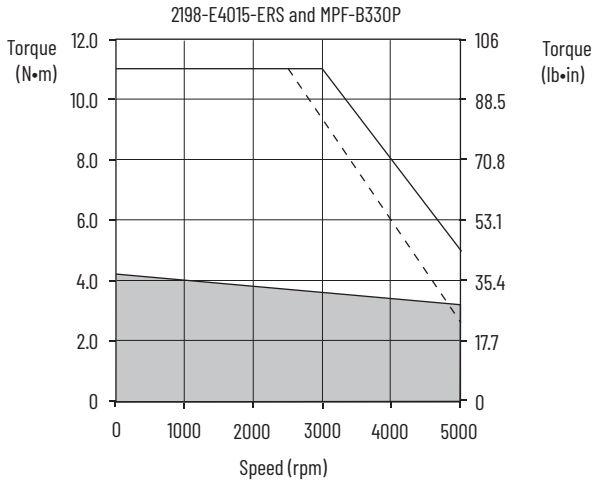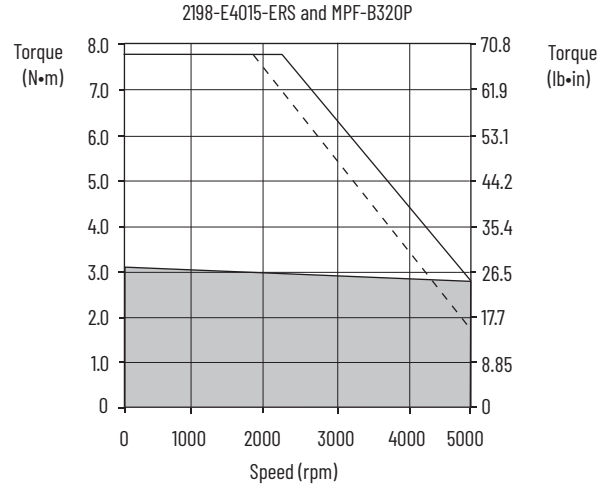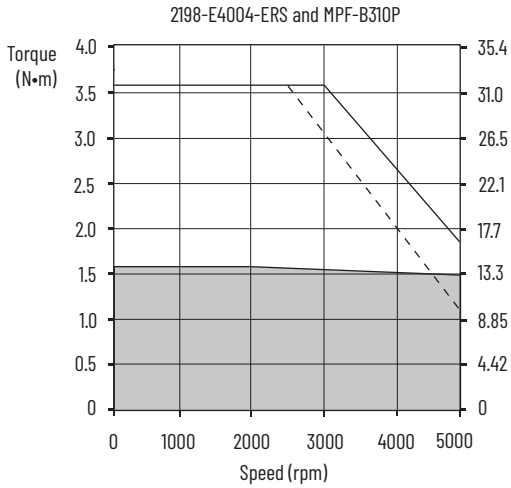

= Intermittent operating region
 = Continuous operating region
 = Drive operation with 400V AC rms input voltage

Kinetix 5100 (400V-class) Drives/Kinetix MPF Servo Motor Curves (continued)

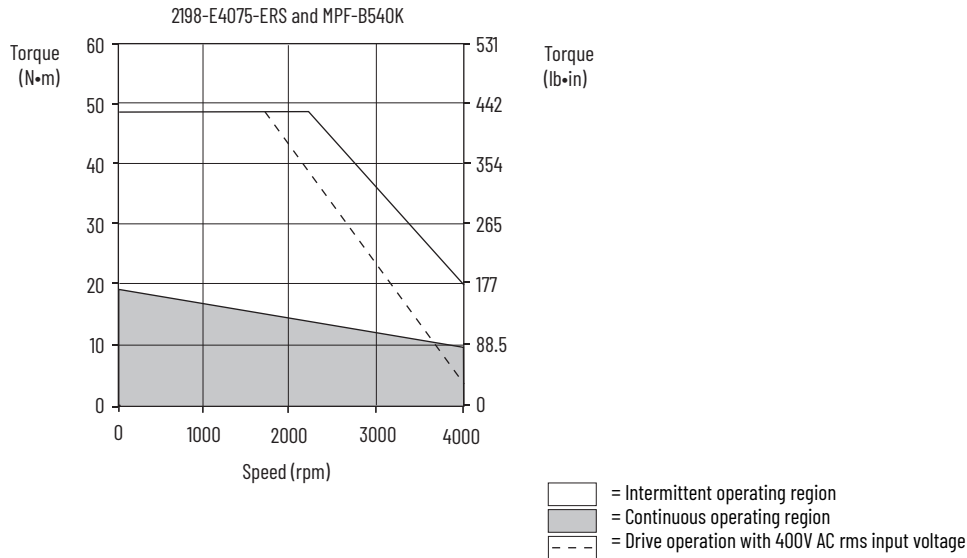

Kinetix 5100 (200V-class) Drives with Kinetix MPS Stainless Steel Motors

This section provides system combination information for the Kinetix 5100 drives (with 230V, nominal input) when matched with Kinetix MPS (200V-class) servo motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

These system performance tables and torque/speed curves reflect single-phase and three-phase drive operation with 200V-class motors; however, only 2198-E1004-ERS, 2198-E1007-ERS, 2198-E1015-ERS, and 2198-E1020-ERS drives are capable of single-phase operation.

Kinetix MPS Motor Cable Combinations

Rotary Motor (200V-class) Cat. No.	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
MPS-A330P	2090-CPxM7DF-16AAxx (standard, non-flex) 2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DF-CEAAxx or 2090-CFBM7DD-CEAAxx (standard, non-flex)
MPS-A4540F		2090-CFBM7DF-CEAFxx or 2090-CFBM7DD-CEAFxx (continuous-flex) Absolute High-resolution Feedback

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).


For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPS Motor Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
MPS-A330P	5000	5000	9.80	3.60 (32.0)	33.5	9.79 (86.6)	1.3	2198-E1015-ERS
					38.0	11.10 (98.2)		2198-E1020-ERS
MPS-A4540F	3000	3000	14.4	8.1 (72)	56.0	27.1 (240)	1.4	2198-E1020-ERS

Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (200V-class) Drives/Kinetix MPS Servo Motor Curves

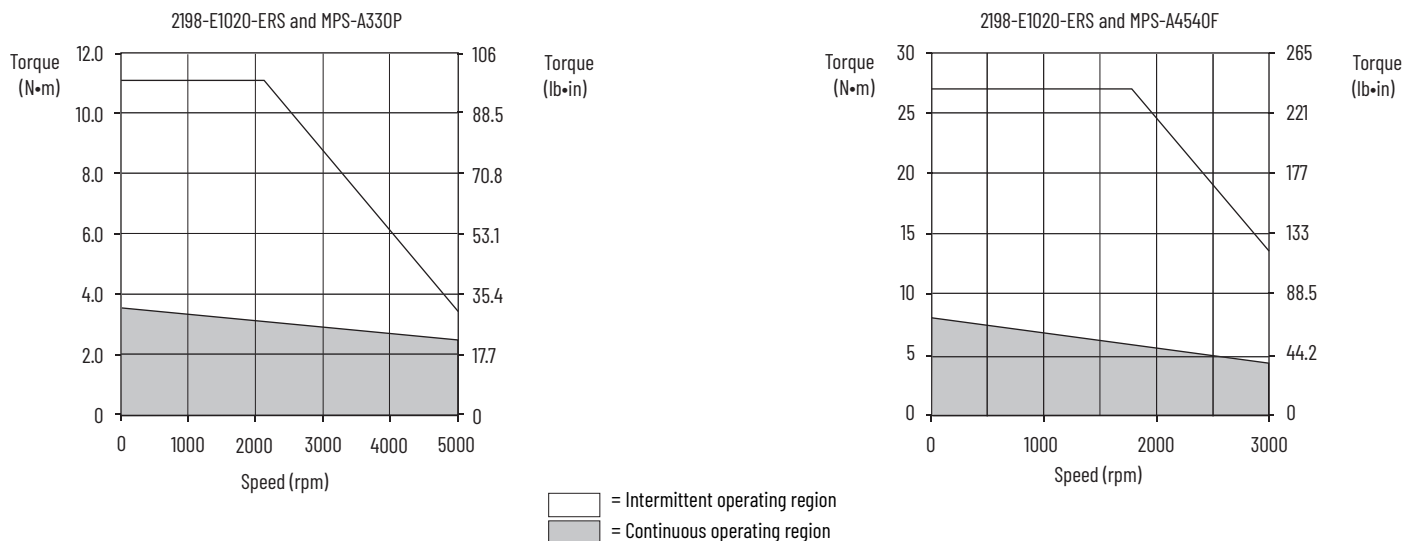

Kinetix 5100 (400V-class) Drives with Kinetix MPS Servo Motors

This section provides system combination information for the Kinetix 5100 drives (with 400 and 480V, nominal input) when matched with Kinetix MPS (400V-class) stainless-steel motors. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

Kinetix MPS Motor Cable Combinations

Rotary Motor (400V-class) Cat. No.	Motor Power Cable	Motor Feedback Cable ⁽¹⁾
MPS-B330P	2090-CPxM7DF-16AAxx (standard, non-flex)	2090-CFBM7DF-CEAAxx or
MPS-B4540F	2090-CPxM7DF-16AFxx (continuous-flex)	2090-CFBM7DD-CEAAxx (standard, non-flex)
		2090-CFBM7DF-CEAFxx or
MPS-B560F	2090-CPxM7DF-14AAxx (standard, non-flex)	2090-CFBM7DD-CEAFxx (continuous-flex)
	2090-CPxM7DF-14AFxx (continuous-flex)	Absolute High-resolution Feedback

(1) Use the 2198-K51CK-D15M feedback connector kit with flying-lead cables on the drive end. Refer to Required Drive Accessories on [page 6](#).




For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Motor-end connector kits are available for motor power/brake and feedback cables. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for more information. Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix MPS Motor Performance Specifications with Kinetix 5100 (400V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N•m (lb•in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N•m (lb•in)	Motor Rated Output kW	Kinetix 5100 Drives (480V AC input)
MPS-B330P	5000	5000	4.9	3.60 (32)	19.0	11.0 (97.2)	1.3	2198-E4015-ERS
MPS-B4540F	3000	3000	7.1	8.1 (72)	21.4	22.3 (197)	1.4	2198-E4015-ERS
					26.0	27.1 (240)		2198-E4020-ERS
MPS-B560F	3000	3000	17.0	21.5 (190)	36.9	36.8 (326)	3.5	2198-E4030-ERS
					68.0	67.8 (600)		2198-E4075-ERS

Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (400V-class) Drives/Kinetix MPS Servo Motor Curves

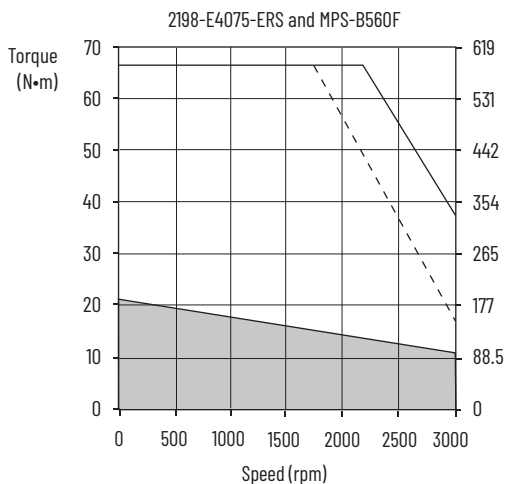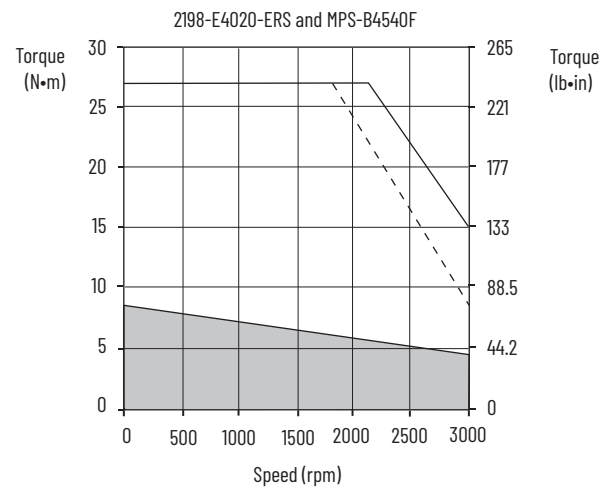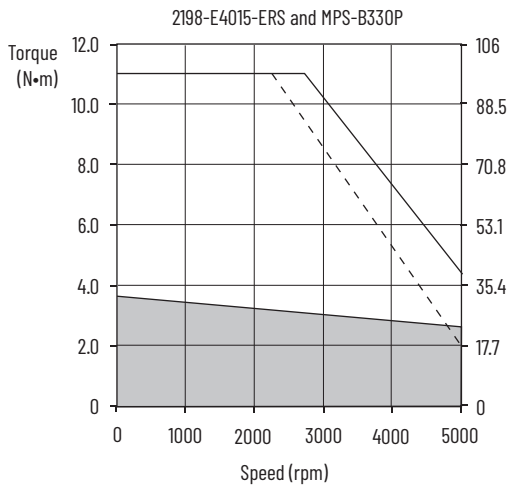

- = Intermittent operating region
- = Continuous operating region
- = Drive operation with 400V AC rms input voltage

Kinetix 5100 (200V-class) Drives with Kinetix TLY Servo Motors

This section provides system combination information for the Kinetix 5100 drives when matched with Kinetix TLY compact servo motors. Compatible Kinetix TLY motors are equipped with absolute high-resolution or incremental encoder feedback. Included are motor power/brake and feedback cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

Kinetix TLY Motor Cable Combinations

Motor Cat. No. (200V-class)	Motor Power/Brake Cable	Motor Feedback Cable ⁽¹⁾
TLY-A110x, TLY-A120x, TLY-A130x	2090-CPWM6DF-16AAxx (standard, non-flex) (without brake)	2090-CFBM6DF-CBAxx or 2090-CFBM6DD-CCAxx (standard, non-flex) Absolute High-resolution or Incremental Feedback
TLY-A220x, TLY-A230x		
TLY-A2530P, TLY-A2540P		
TLY-A310M		

(1) For TLY-Axxx-H motors with incremental encoder feedback, use 2090-CFBM6DF-CBAxx flying-lead cables and 2198-K51CK-D15M connector kit (battery not required) or use 2090-CFBM6DD-CCAxx (15-pin connector) cable on the drive end. Refer to Required Drive Accessories on [page 6](#) for more information.

The TLY-Axxx-B motors with 17-bit high-resolution encoder feedback require the 2090-CFBM6DF-CBAxx flying-lead feedback cable and 2198-K51CK-D15M connector kit (battery required).

Kinetix TLY motors are characterized as having 1000 mm (39.4 in.) cable extensions with circular plastic connectors and TLY-Axxx catalog numbers.

For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Kinetix TLP Motor Cables Overview beginning on [page 9](#).

Motor-end connector kits, and panel-mounted breakout components (drive end), are available for motor power/brake and feedback cables. Refer to Optional Drive Accessories on [page 8](#).

Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix TLY (non-brake) Motor Performance Specifications with Kinetix 5100 Drives

Performance Specifications (non-brake) with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
TLY-A110x	5000	6000 ⁽¹⁾	0.55	0.096 (0.85)	1.30	0.20 (1.75)	0.041	2198-E1004
TLY-A120x	5000		1.03	0.181 (1.60)	2.50	0.36 (3.20)	0.086	2198-E1004
TLY-A130x	5000		1.85	0.325 (2.88)	4.90	0.76 (6.70)	0.14	2198-E1004
TLY-A220x	5000		3.50	0.836 (7.40)	7.90	1.48 (13.1)	0.35	2198-E1004
TLY-A230x	5000		5.50	1.30 (11.5)	15.5	3.05 (27.0)	0.44	2198-E1007
TLY-A2530P	4400	5000	10.0	2.60 (23.0)	21.0	5.20 (46.0)	0.69	2198-E1015
TLY-A2540P	4575		10.0	2.94 (26.0)	24.8	7.10 (63.0)	0.86	2198-E1015
TLY-A310M	4000	4500	10.0	3.61 (31.9)	30.0	9.0 (79.6)	0.95	2198-E1015

(1) Applies to TLY-AxxxT-H motors with incremental feedback. The TLY-AxxxT-B motors with absolute high-resolution encoders are rated for 5000 rpm.

Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix TLY (brake) Motor Performance Specifications with Kinetix 5100 Servo Drives





Performance Specifications (brake) with Kinetix 5100 (200V-class) Drives

Rotary Motor Cat. No.	Rated Speed rpm	Speed, max rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
TLY-A110x	5000	6000 ⁽¹⁾	0.50	0.086 (0.76)	1.30	0.20 (1.75)	0.037	2198-E1004
TLY-A120x	5000		0.93	0.163 (1.44)	2.50	0.36 (3.20)	0.077	2198-E1004
TLY-A130x	5000		1.67	0.293 (2.59)	4.90	0.76 (6.70)	0.13	2198-E1004
TLY-A220x	5000		3.15	0.757 (6.70)	7.90	1.48 (13.1)	0.24	2198-E1004
TLY-A230x	4250		4.95	1.16 (10.3)	15.5	3.05 (27.0)	0.32	2198-E1007
TLY-A2530P	3650	5000	10.0	2.60 (23.0)	21.0	5.20 (46.0)	0.55	2198-E1015
TLY-A2540P	3750		10.0	2.94 (26.0)	24.8	7.10 (63.0)	0.66	2198-E1015
TLY-A310M	3900	4500	10.0	3.61 (31.9)	30.0	9.0 (79.6)	0.90	2198-E1015

(1) Applies to TLY-AxxxT-H motors with incremental feedback. The TLY-AxxxT-B motors with absolute high-resolution encoders are rated for 5000 rpm.







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

Kinetix 5100 (200V-class) Drives/TLY-AxxxP-B (absolute high-resolution) Motor Curves

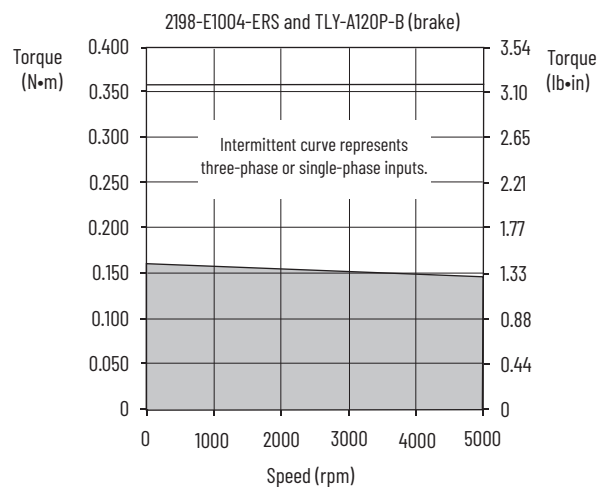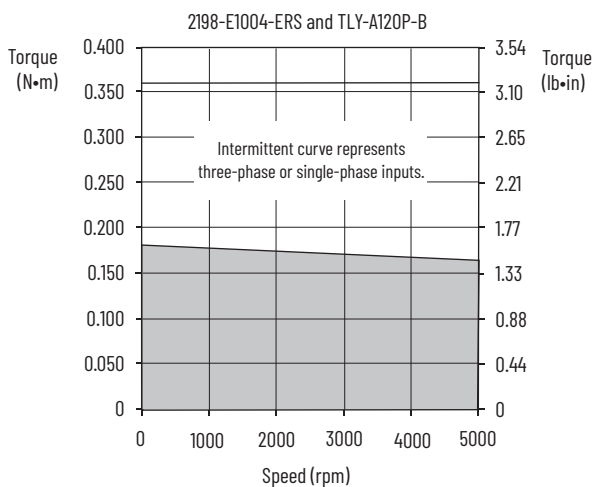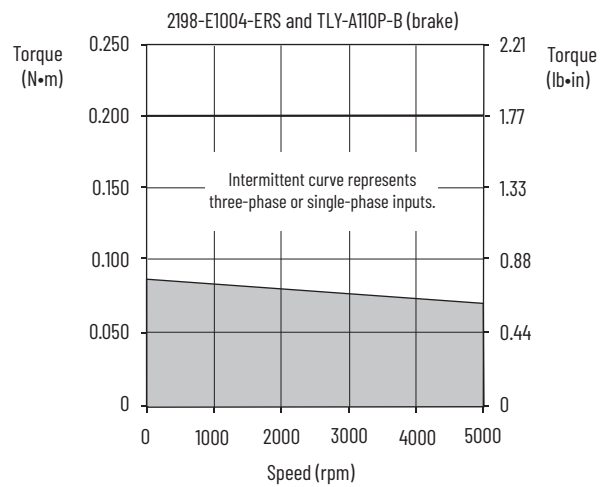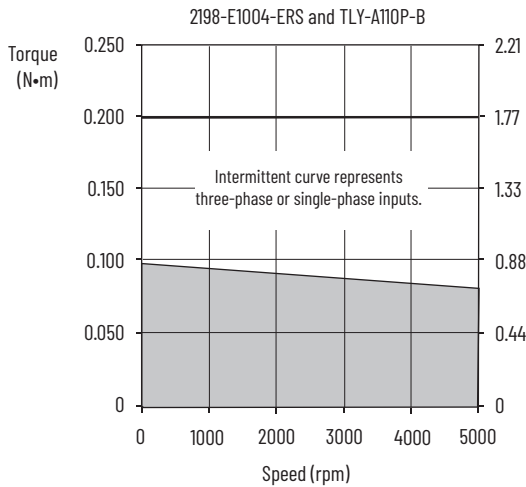







= Intermittent operating region
 = Continuous operating region
 = Drive operation (single-phase input)

Kinetix 5100 (200V-class) Drives/TLY-AxxxP-B (absolute high-resolution) Motor Curves (continued)

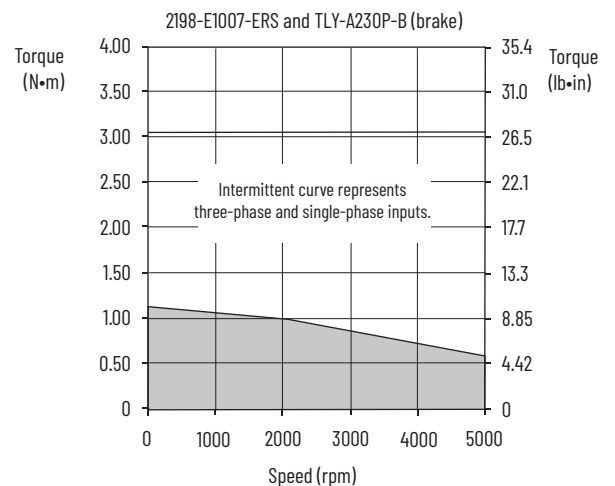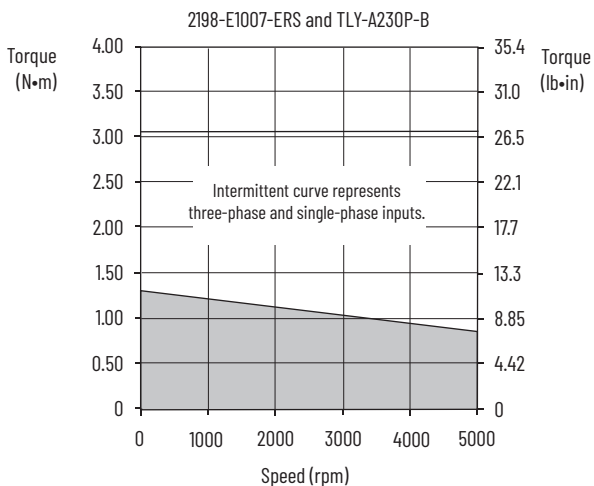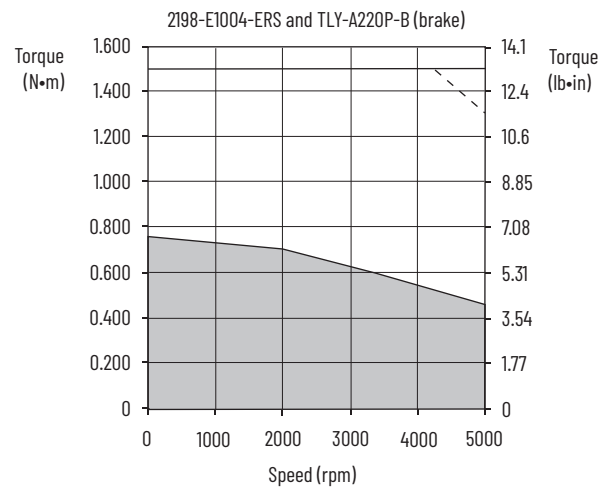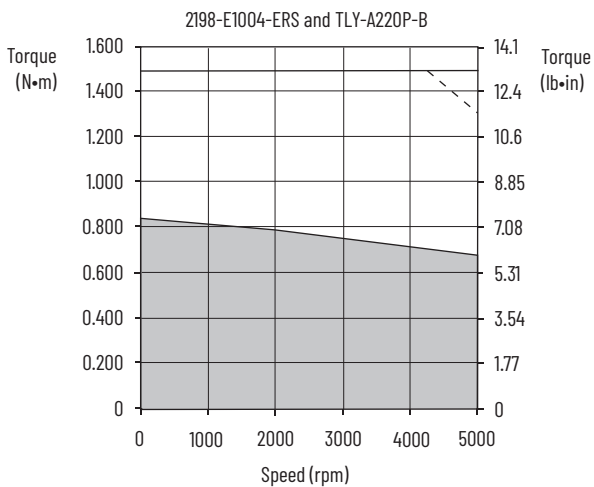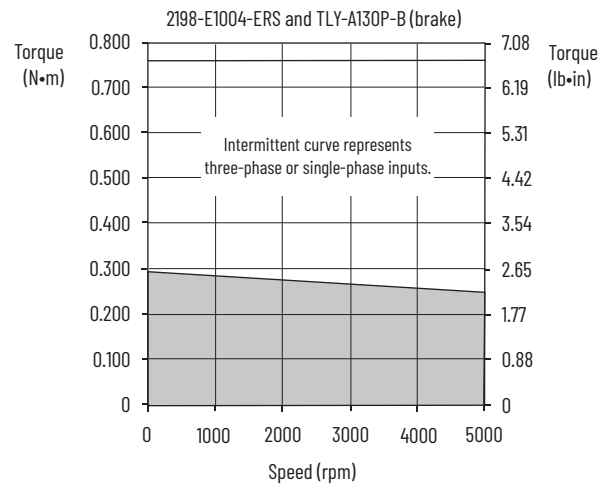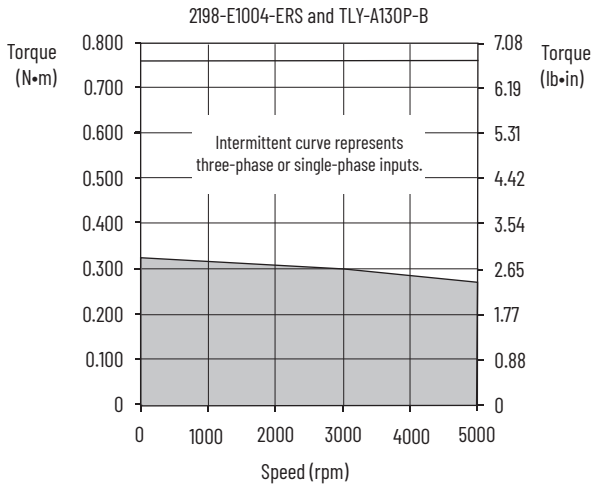





— = Intermittent operating region
 ■ = Continuous operating region
 --- = Drive operation (single-phase input)

Kinetix 5100 (200V-class) Drives/TLY-AxxxT-H (incremental) Motor Curves

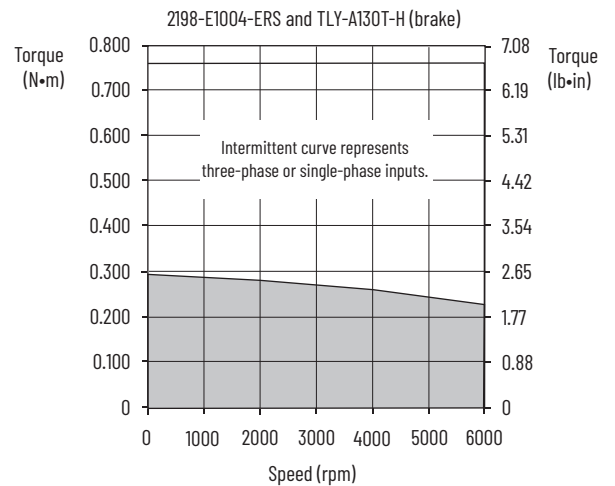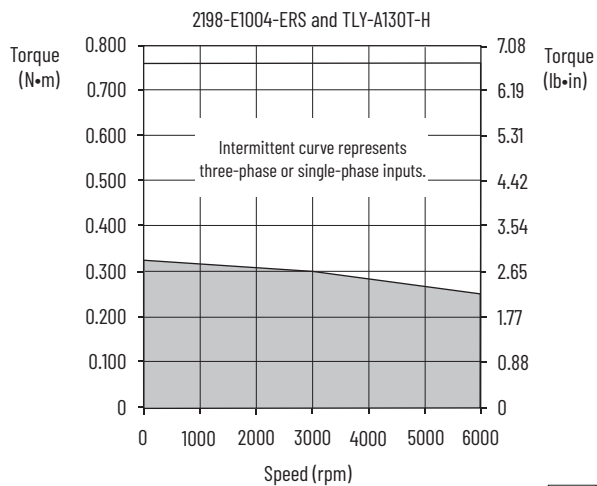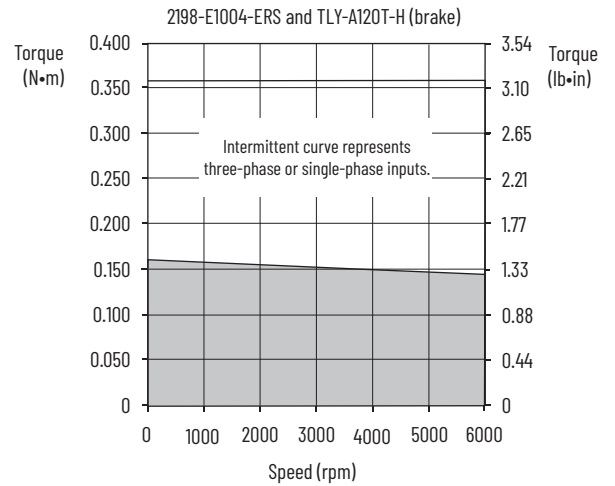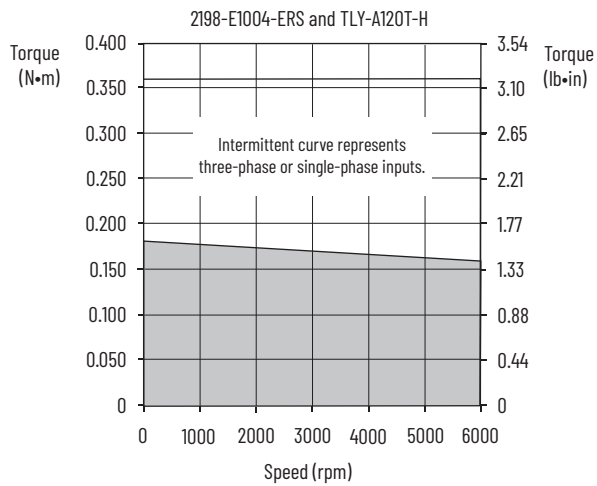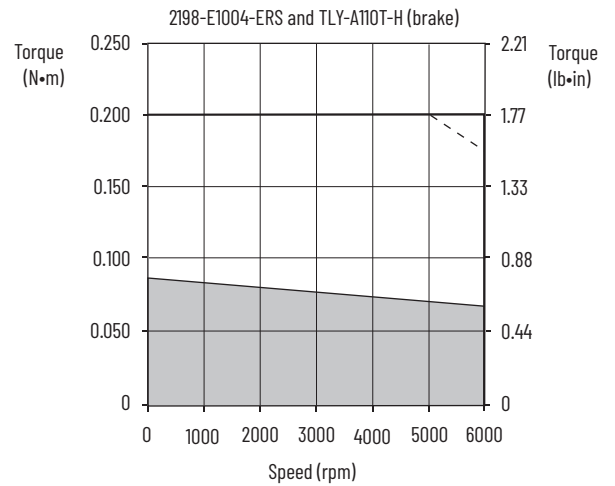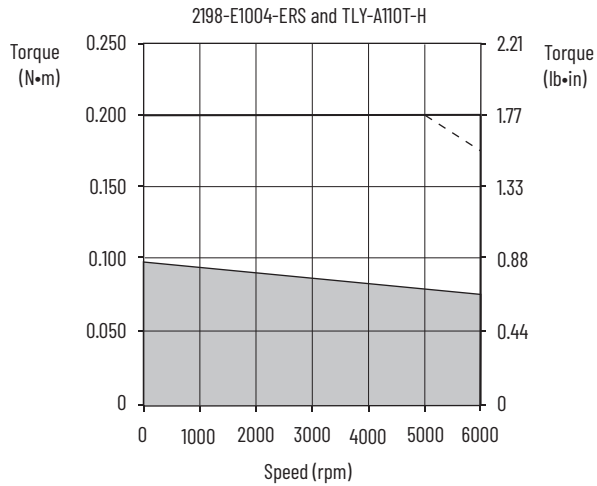







[Shaded Area] = Intermittent operating region
 [Dashed Line] = Continuous operating region
 [Dashed Line] = Drive operation (single-phase input)

Kinetix 5100 (200V-class) Drives/TLY-AxxxT-H (incremental) Motor Curves (continued)

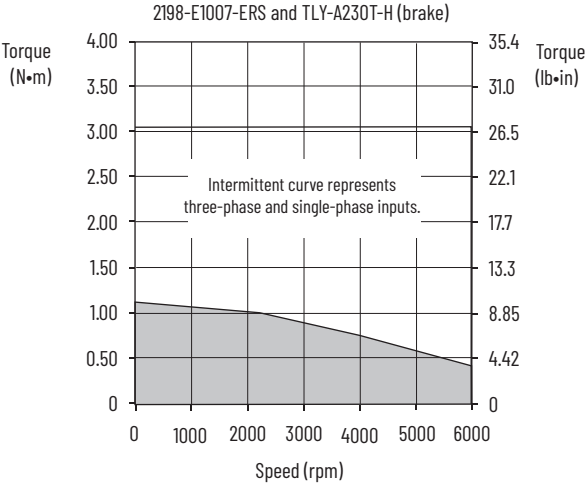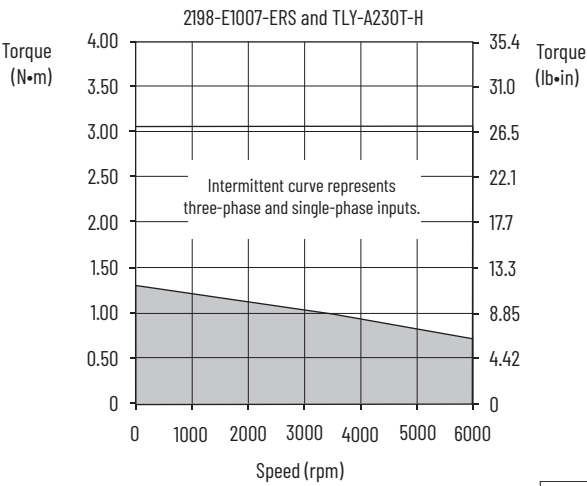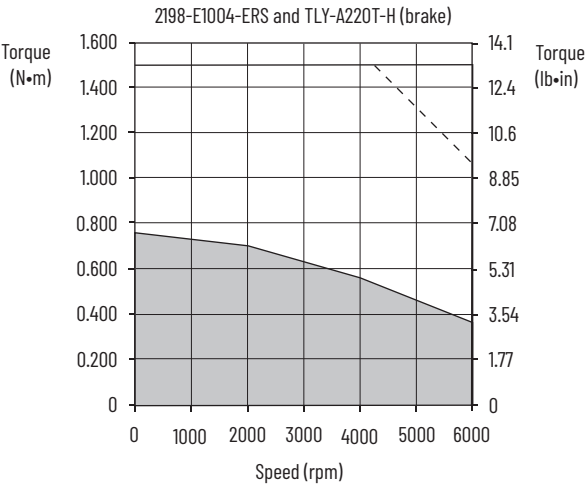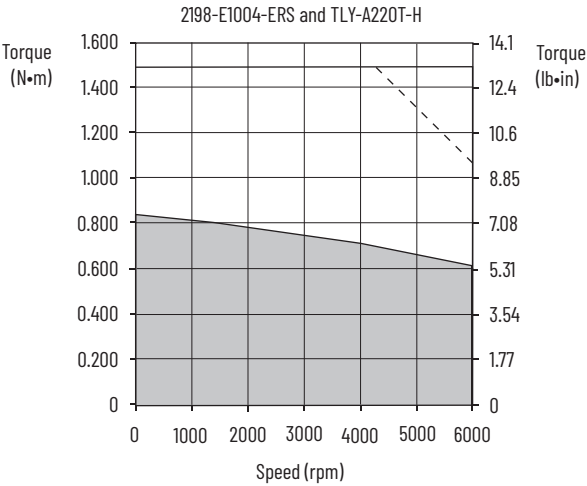

□ = Intermittent operating region
■ = Continuous operating region
--- = Drive operation (single-phase input)

Kinetix 5100 (200V-class) Drives/TLY-Axxxx-x Motor Curves

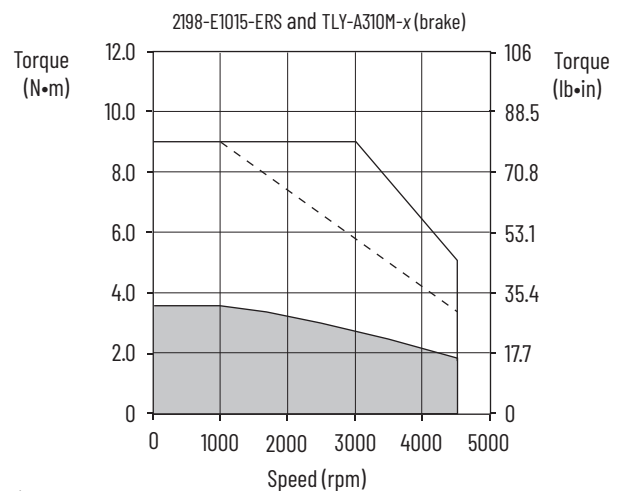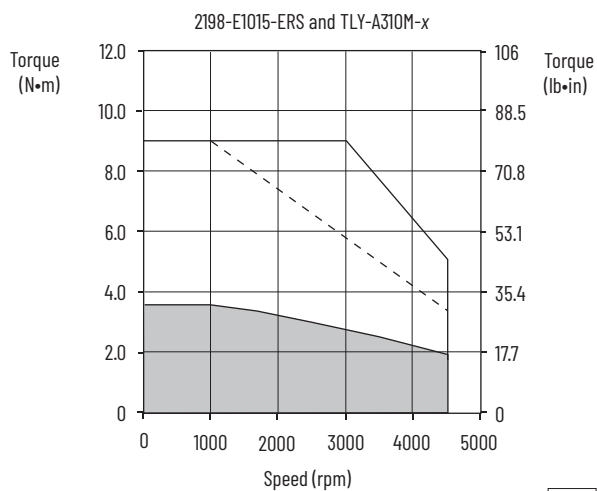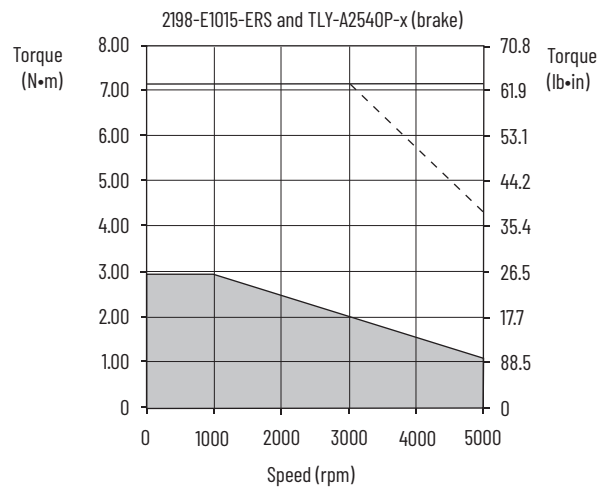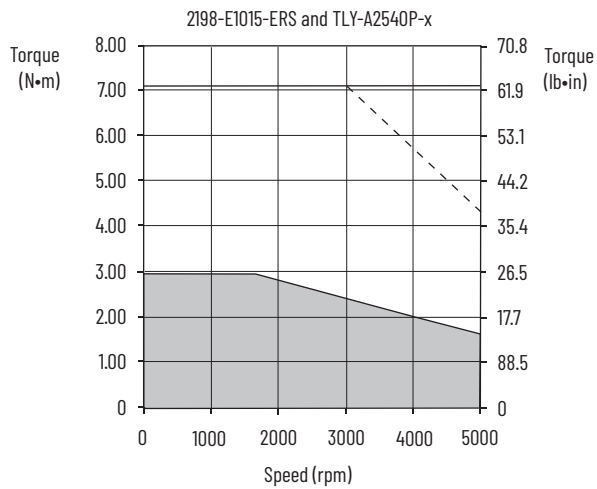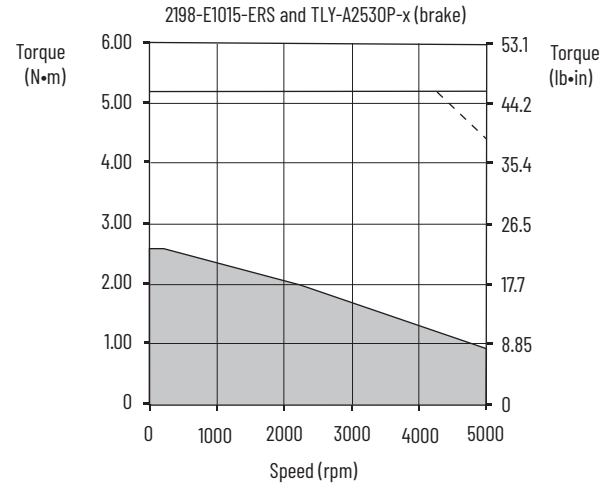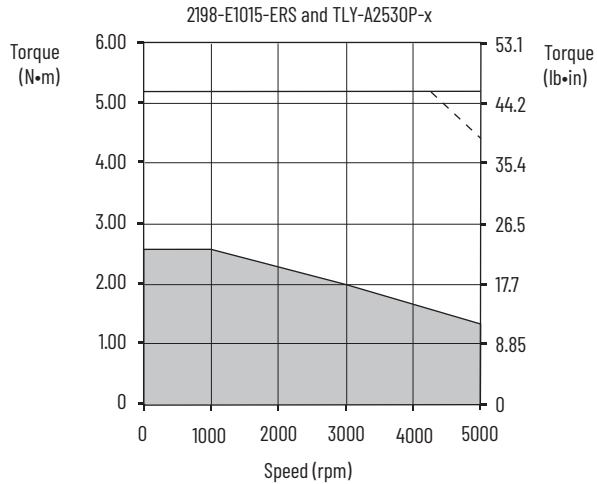

= Intermittent operating region
 = Continuous operating region
 = Drive operation (single-phase input)

Kinetix 5100 (200V-class) Drives with Kinetix TL Servo Motors

This section provides system combination information for the Kinetix 5100 servo drives when matched with Kinetix TL compact servo motors. Compatible Kinetix TL motors are equipped with absolute high-resolution encoder feedback. Included in this section are motor power, feedback, and brake cable catalog numbers, system performance specifications, and the optimum torque/speed curves.

Kinetix TL Motor Cable Combinations

Motor Cat. No.	Motor Power Cable	Motor Feedback Cable ^{(1) (2)}	Motor Brake Cable
TL-A110P, TL-A120P, TL-A130P	2090-DANPT-16Sxx	2090-DANFCT-Sxx Absolute High-resolution	2090-DANBT-18Sxx
TL-A220P, TL-A230P			
TL-A2530P, TL-A2540P			
TL-A410M			

(1) For applications where battery backup is required use 2090-DANFCT-Sxx cable, but remove the drive-end connector and prepare flying leads for termination in the 2198-K5ICK-D15M connector kit (with customer-supplied battery).

(2) For applications where battery backup is not required use 2090-DANFCT-Sxx cable and plug the drive-end connector into the 15-pin motor feedback connector.

Kinetix TL-Axxx-B motors are characterized as having 300 mm (11.8 in.) cable extensions with rectangular connectors.

For cable configuration illustrations and feature descriptions, by catalog number, refer to 2090-Series Motor Power/Brake and Feedback Cables Overview beginning on [page 11](#). Cable length xx is in meters. Refer to the Kinetix Motion Accessories Technical Data, publication [KNX-TD004](#), for standard cable lengths.

Kinetix TL (non-brake) Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor	Rated Speed rpm	Maximum Speed rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
TL-A110P	5000	5000	0.55	0.096 (0.85)	1.30	0.20 (1.75)	0.041	2198-E1004
TL-A120P			1.03	0.181 (1.60)	2.50	0.36 (3.20)	0.086	2198-E1004
TL-A130P			1.85	0.325 (2.88)	4.90	0.76 (6.70)	0.14	2198-E1004
TL-A220P			3.50	0.836 (7.40)	7.90	1.48 (13.1)	0.35	2198-E1004
TL-A230P			5.50	1.30 (11.5)	15.5	3.05 (27.0)	0.44	2198-E1007
TL-A2530P	4400	4500	10.0	2.60 (23.0)	21.0	5.20 (46.0)	0.69	2198-E1015
TL-A2540P	4575		10.0	2.94 (26.0)	24.8	7.10 (63.0)	0.86	2198-E1015
TL-A410M	4500		15.5	5.42 (48.0)	43.4	13.0 (115.0)	2.0	2198-E1020







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.



Kinetix TL (brake) Performance Specifications with Kinetix 5100 (200V-class) Drives

Rotary Motor	Rated Speed rpm	Maximum Speed rpm	System Continuous Stall Current A 0-pk	System Continuous Stall Torque N·m (lb·in)	System Peak Stall Current A 0-pk	System Peak Stall Torque N·m (lb·in)	Motor Rated Output kW	Kinetix 5100 Drives (230V AC input)
TL-A110P	5000	5000	0.50	0.086 (0.76)	1.30	0.20 (1.75)	0.037	2198-E1004
TL-A120P			0.93	0.163 (1.44)	2.50	0.36 (3.20)	0.077	2198-E1004
TL-A130P			1.67	0.293 (2.59)	4.90	0.76 (6.70)	0.13	2198-E1004
TL-A220P			3.15	0.757 (6.70)	7.90	1.48 (13.10)	0.24	2198-E1004
TL-A230P			4.95	1.160 (10.30)	15.5	3.05 (27.0)	0.32	2198-E1007
TL-A2530P	3650	4500	10.0	2.60 (23.0)	21.0	5.20 (46.0)	0.55	2198-E1015
TL-A2540P	3750		10.0	2.940 (26.00)	24.8	7.10 (63.0)	0.66	2198-E1015
TL-A410M	4500		14.0	4.860 (43.0)	43.4	13.0 (115.0)	1.80	2198-E1020







Performance specification data and curves reflect nominal system performance of a typical system with motor ambient at 40 °C (104 °F), drive ambient at 50 °C (122 °F), and rated line voltage. For additional information on ambient and line conditions, refer to Motion Analyzer software.

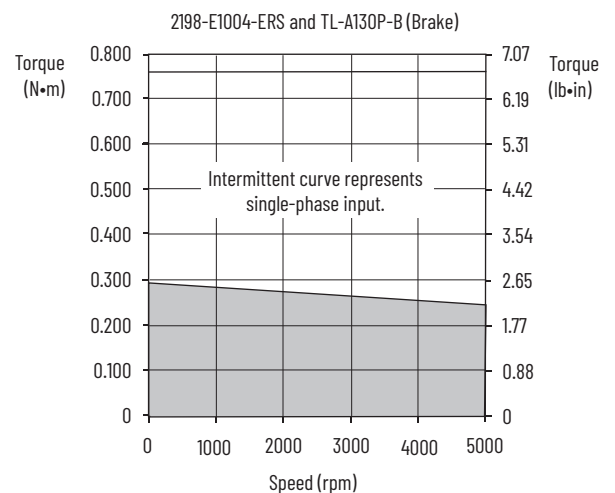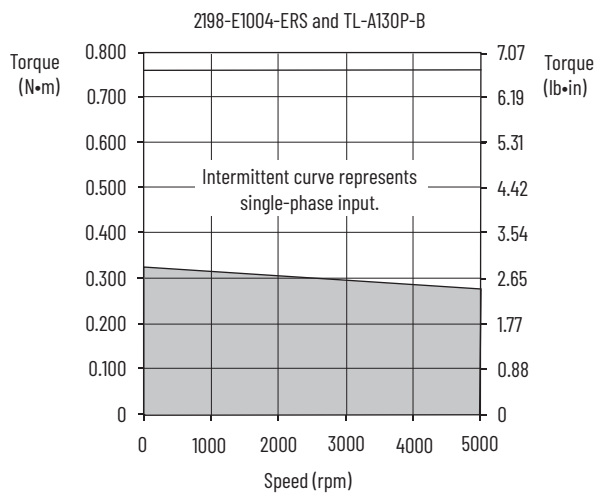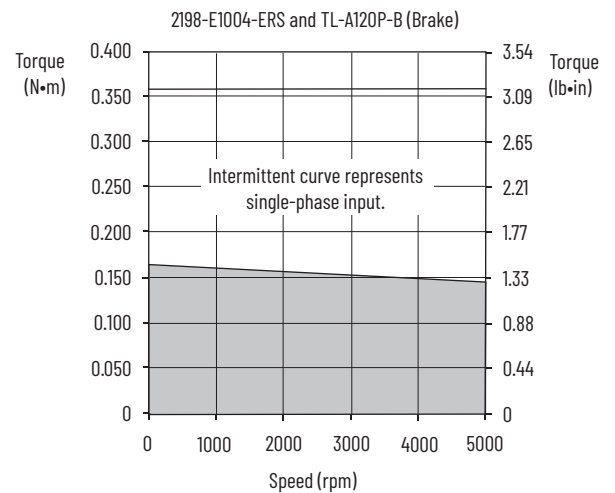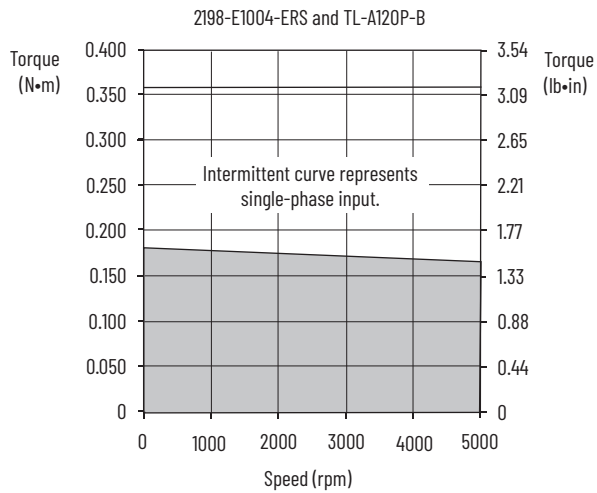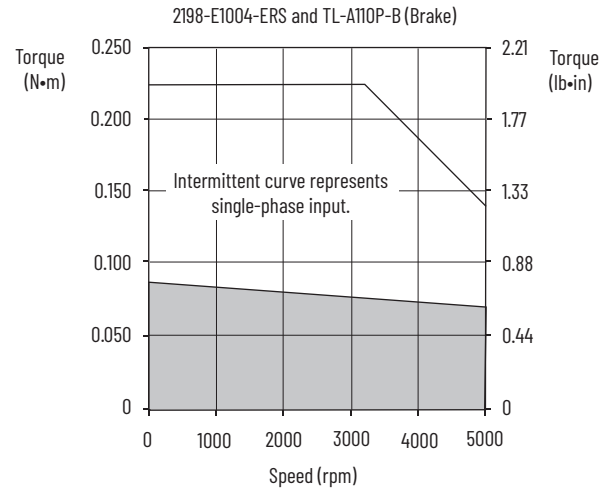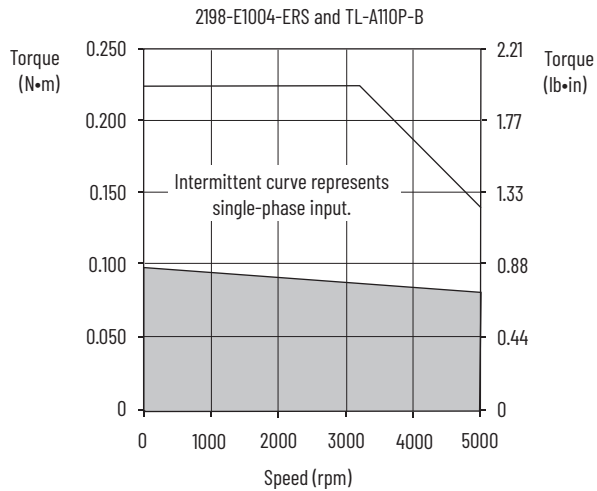Kinetix 5100 (200V-class) Drives/TL-Axxxx-B (absolute high-resolution) Motor Curves







 = Intermittent operating region
 = Continuous operating region

Kinetix 5100 (200V-class) Drives/TL-Axxxx-B (absolute high-resolution) Motor Curves (continued)

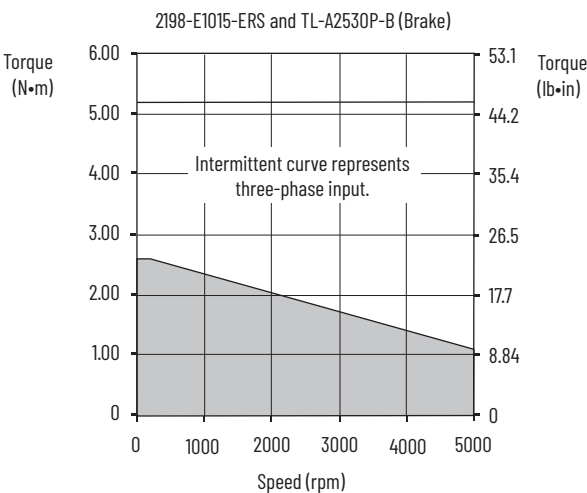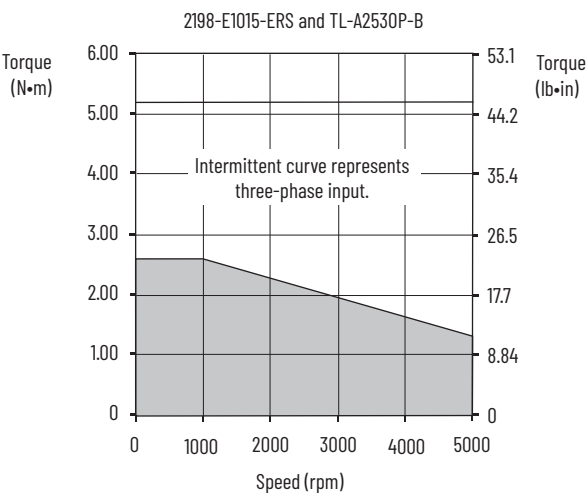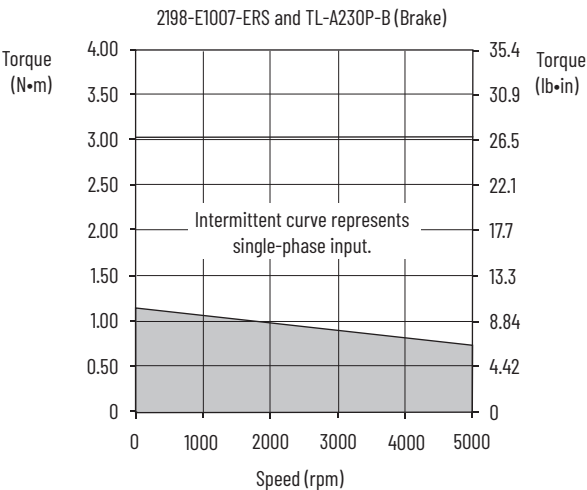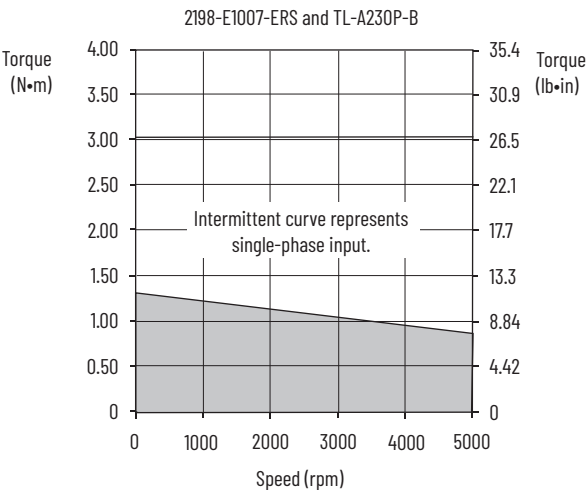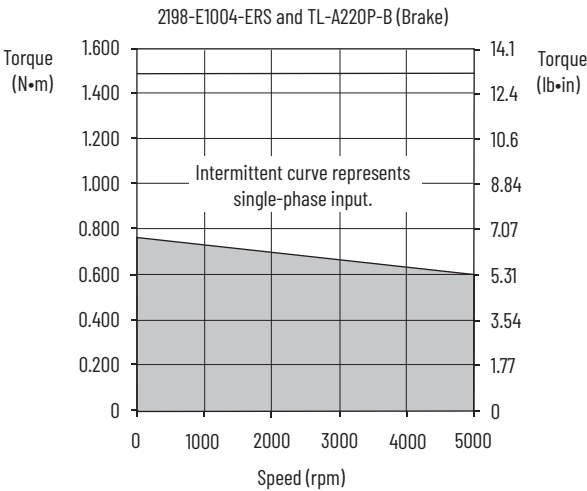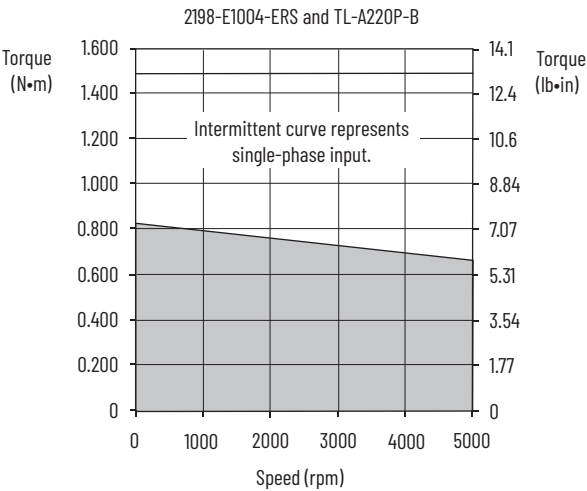

□ = Intermittent operating region
■ = Continuous operating region

Kinetix 5100 (200V-class) Drives/TL-Axxxx-B (absolute high-resolution) Motor Curves (continued)

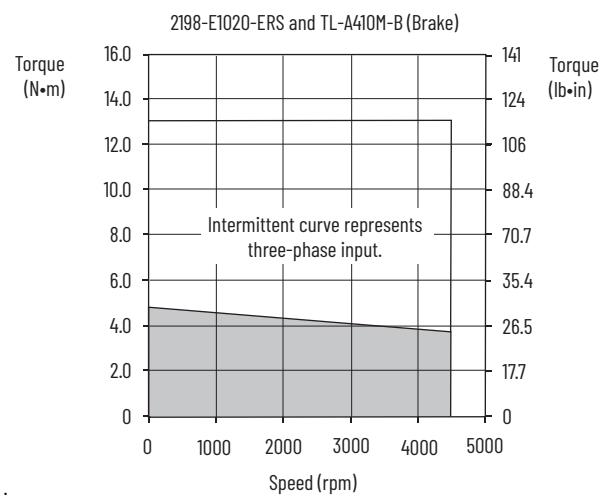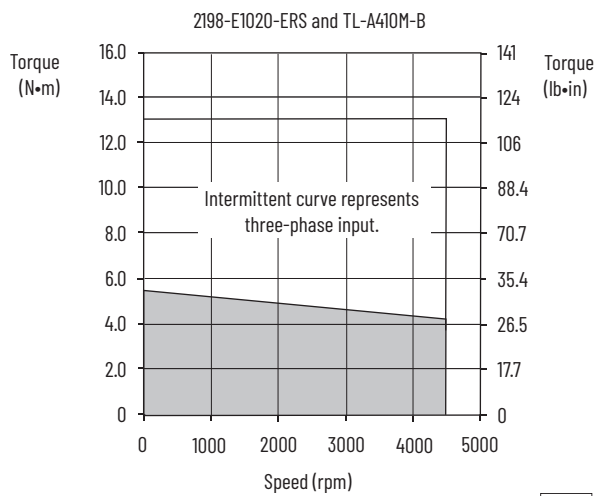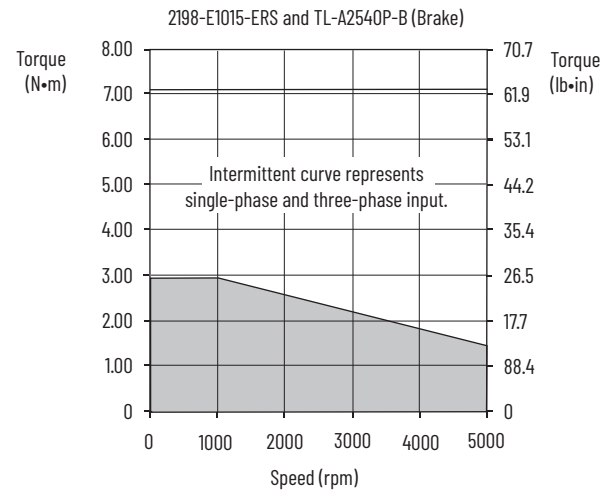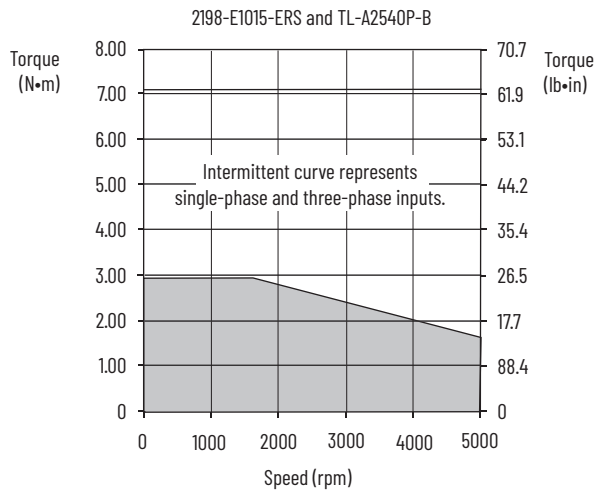

□ = Intermittent operating region
 ■ = Continuous operating region

Notes:

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

Resource	Description
Kinetix Rotary Motion Specifications, publication KNX-TD001	Product specifications for Kinetix TLP, Kinetix MPL, MPM, MPF, and MPS, and Kinetix TL and TLY rotary servo motors.
Kinetix Servo Drives Specifications, publication KNX-TD003	Product specifications for Kinetix Integrated Motion over the EtherNet/IP network, Integrated Motion over Sercos interface, EtherNet/IP networking, and component servo drive families.
Kinetix Motion Accessories Specifications, publication KNX-TD004	Product specifications for Bulletin 2090 motor and interface cables, low-profile connector kits, drive power components, and other servo drive accessory items.
Kinetix 5100 Single-axis EtherNet/IP Servo Drives User Manual, publication 2198-UM004	Information on installing, configuring, startup, troubleshooting, and applications for your Kinetix servo drive system.
Kinetix 5700 Drive Systems, publication KNX-RM010	System design guide to determine and select the required (drive specific) drive module, power accessory, connector kit, motor cable, and interface cable catalog numbers for your drive and motor/actuator motion control system. Included are system performance specifications and torque/speed curves (rotary motion) and force/velocity curves (linear motion) for your motion application.
Kinetix 5500 Drive Systems, publication KNX-RM009	
Kinetix 5300 Drive Systems, publication KNX-RM012	
Kinetix Motion Control Selection Guide, publication KNX-SG001	Overview of Kinetix servo drives, motors, actuators, and motion accessories designed to help make initial decisions for the motion control products best suited for your system requirements.
System Design for Control of Electrical Noise Reference Manual, publication GMC-RM001	Information, examples, and techniques designed to minimize system failures caused by electrical noise.
Servo Drive Installation Best Practices Application Technique publication MOTION-AT004	Best practice examples to help reduce the number of potential noise or electromagnetic interference (EMI) sources in your system and to make sure that the noise sensitive components are not affected by the remaining noise.
MicroLogix™ 1100 Programmable Controllers User Manual, publication 1763-UM001	Provides information on how to install, wire, and troubleshoot the MicroLogix programmable controllers.
MicroLogix 1200 Programmable Controllers User Manual, publication 1762-UM001	
MicroLogix 1400 Programmable Controllers User Manual, publication 1766-UM001	
Micro810® Programmable Controllers User Manual, publication 2080-UM001	Provides information on how to install, wire, and troubleshoot the Micro800 programmable controllers.
Micro820™ Programmable Controllers User Manual, publication 2080-UM005	
Micro830®, Micro850®, Micro870™, Programmable Controllers User Manual, publication 2080-UM002	
GuardLogix 5570 Controllers User Manual, publication 1756-UM022	Provides information on how to install, configure, program, and use ControlLogix® controllers and GuardLogix® controllers in Studio 5000 Logix Designer® projects.
GuardLogix 5580 Controllers User Manual, publication 1756-UM543	
Compact GuardLogix 5370 Controllers User Manual, publication 1769-UM022	Provides information on how to install, configure, program, and use CompactLogix™ and Compact GuardLogix controllers.
Compact GuardLogix 5380 Controllers User Manual, publication 5069-UM001	
GuardLogix 5570 and Compact GuardLogix 5370 Controller Systems Safety Reference Manual, publication 1756-RM099	Provides information on how to achieve and maintain Safety Integrity Level (SIL) and Performance Level (PL) safety application requirements for GuardLogix and Compact GuardLogix controllers.
GuardLogix 5580 and Compact GuardLogix 5380 Controller Systems Safety Reference Manual, publication 1756-RM012	
Industrial Ethernet Media Brochure, publication 1585-BR001	Information to determine which Bulletin 1585 Ethernet cable fits your application and the product specifications to help select the appropriate components.
Rockwell Automation Product Selection website, rok.auto/systemtools	Online product selection and system configuration tools, including AutoCAD (DXF) drawings.
Motion Analyzer System Sizing and Selection Tool website https://motionanalyzer.rockwellautomation.com/	Comprehensive motion application sizing tool used for analysis, optimization, selection, and validation of your Kinetix Motion Control system.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.
Rockwell Automation Industrial Automation Glossary, publication AG-71	A glossary of industrial automation terms and abbreviations.

You can view or download publications at rok.auto/literature.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, and product notification updates.	rok.auto/support
Knowledgebase	Access Knowledgebase articles.	rok.auto/knowledgebase
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.





Allen-Bradley, CompactLogix, ControlLogix, expanding human possibility, Kinetix, LDC-Series, LDL-Series, Logix 5000, Rockwell Automation, and Studio 5000 Logix Designer are trademarks of Rockwell Automation, Inc.

EtherNet/IP is a trademark of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    

rockwellautomation.com — expanding **human possibility™**

AMERICAS: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

EUROPE/MIDDLE EAST/AFRICA: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

ASIA PACIFIC: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication KNX-RM011C-EN-P - January 2021

Supersedes Publication KNX-RM011B-EN-P - November 2020

Copyright © 2021 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.